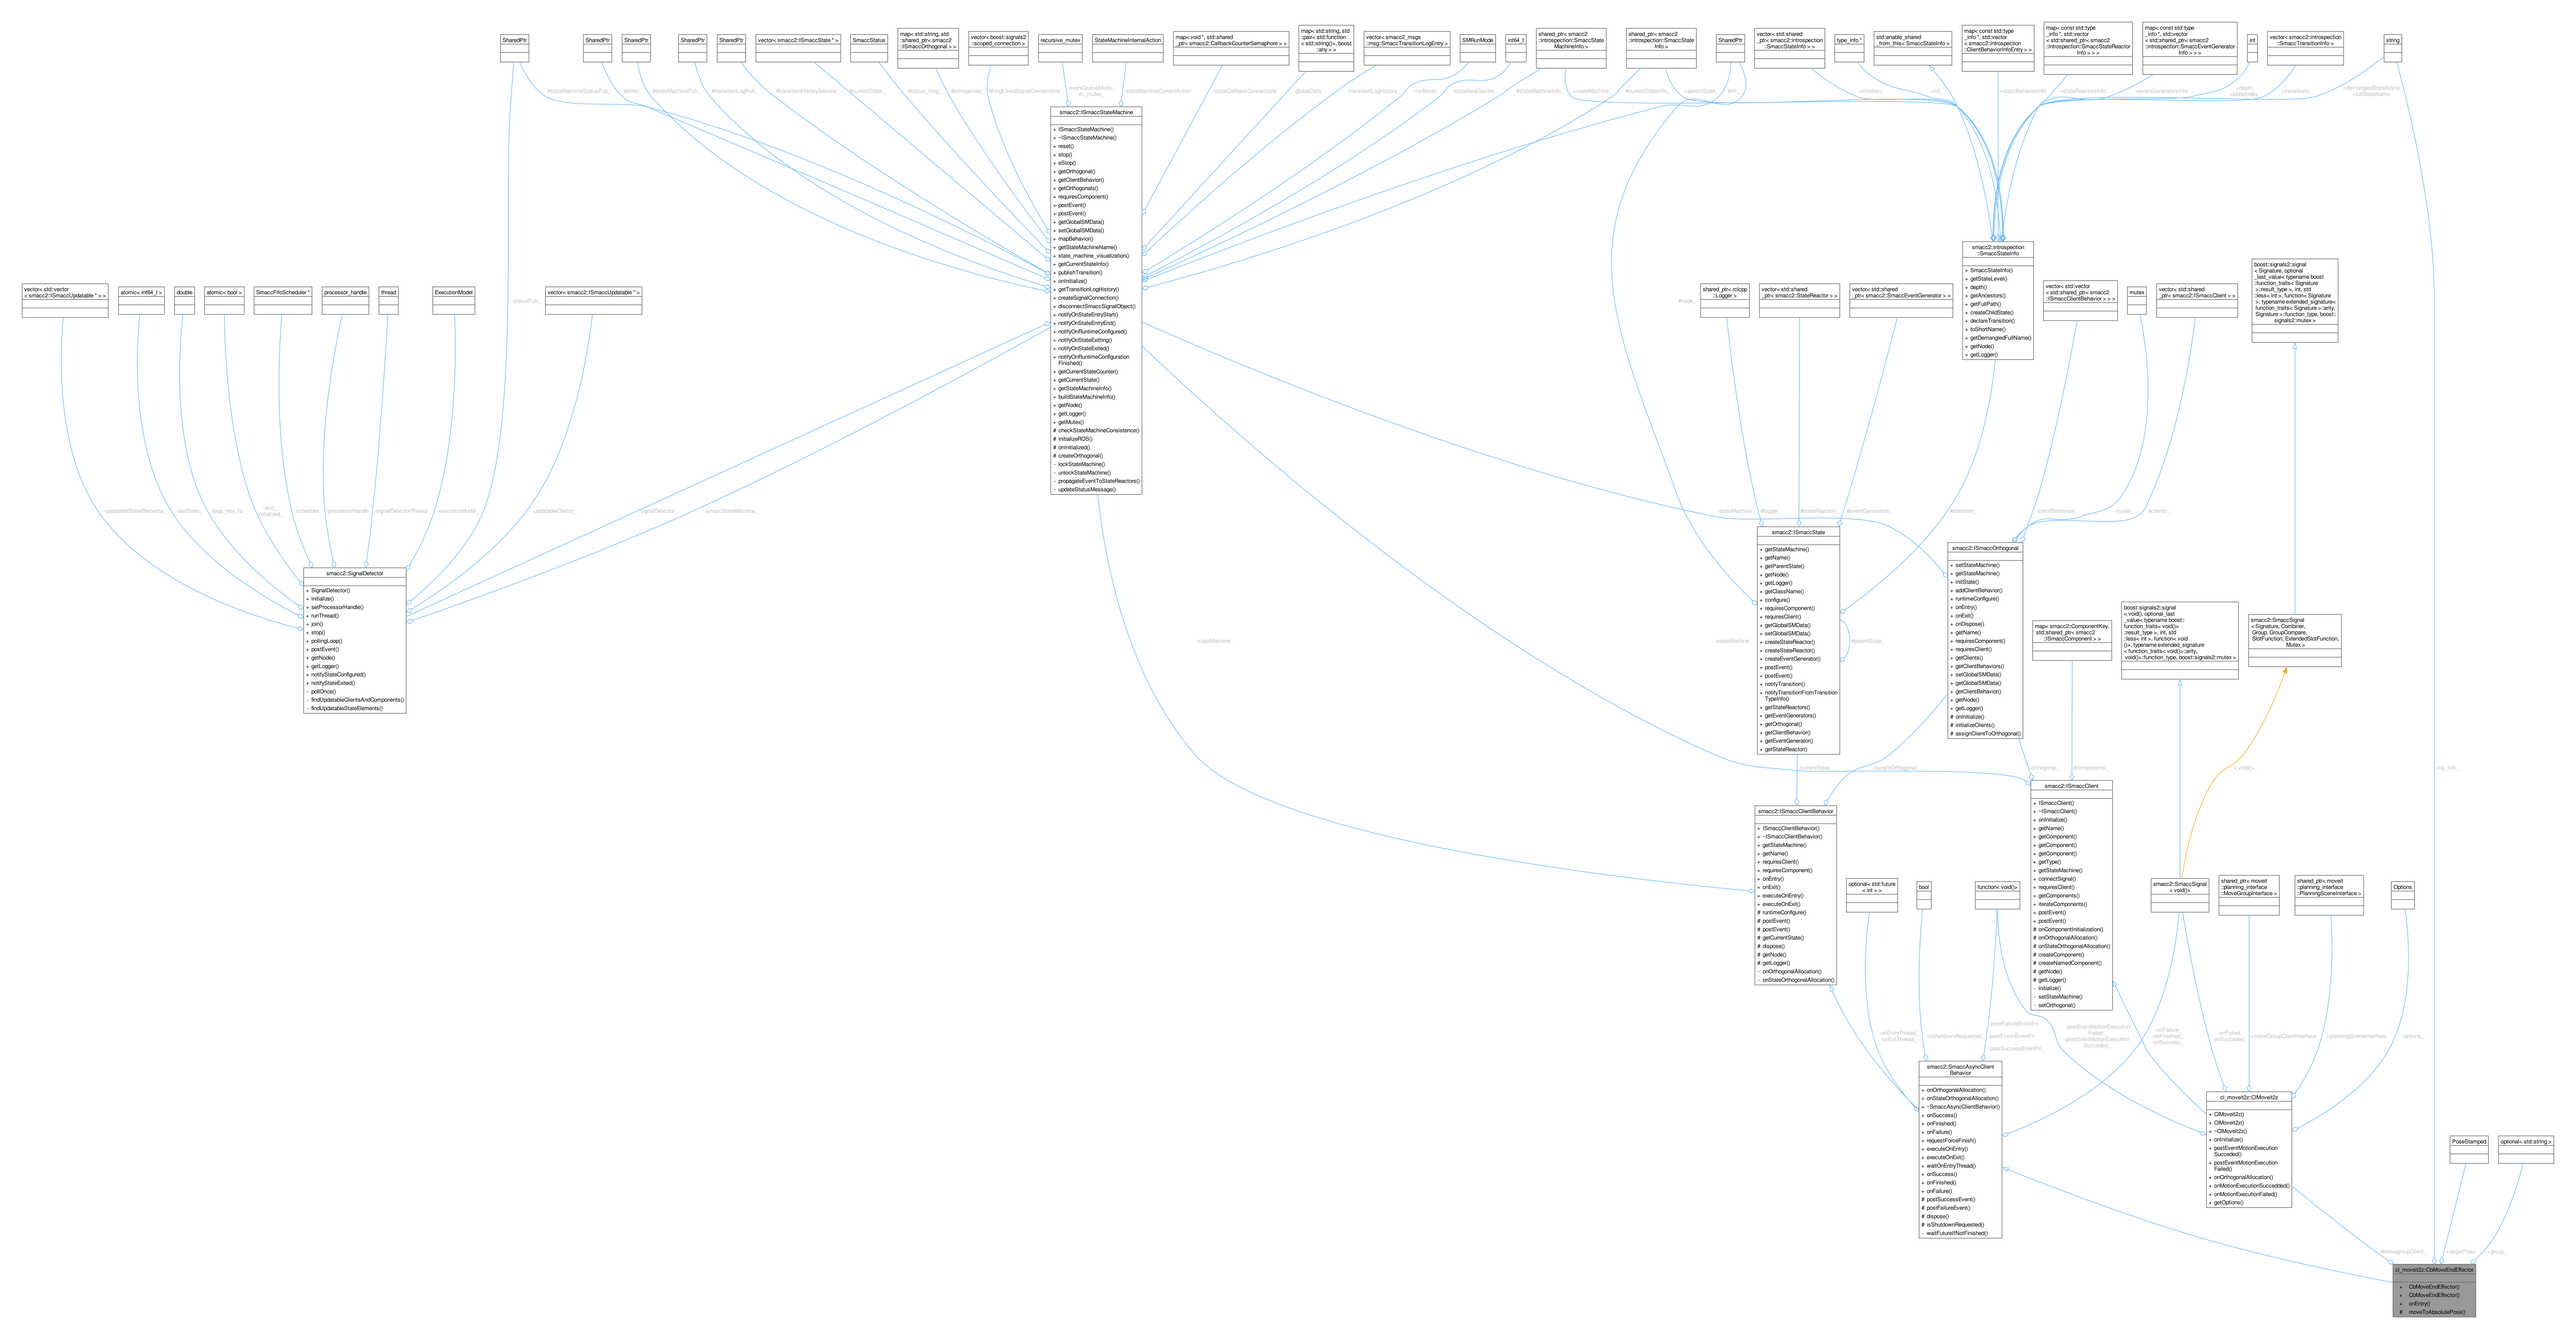

SharedPtr
#stateMachineStatusPub_
#timer_
#stateMachinePub_
vector< smacc2::ISmaccState * >
#transitionLogPub_
#transitionHistoryService_
SmaccStatus
#currentState_
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
#status_msg_
vector< boost::signals2 ::scoped_connection >
#orthogonals_
recursive_mutex
#longLivedSignalConnections_
#eventQueueMutex_ m_mutex_
StateMachineInternalAction
#stateMachineCurrentAction
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
#stateCallbackConnections_
map< std::string, std ::pair< std::function < std::string()>, boost ::any > >
#globalData_
vector< smacc2_msgs ::msg::SmaccTransitionLogEntry >
#transitionLogHistory_
SMRunMode
#runMode_
int64_t
#stateSeqCounter_
shared_ptr< smacc2 ::introspection::SmaccStateMachineInfo >
#stateMachineInfo_
#stateMachine_
shared_ptr< smacc2 ::introspection::SmaccState Info >
#currentStateInfo_
#parentState_
#info_
vector< std::shared _ptr< smacc2::introspection ::SmaccStateInfo > >
type_info *
#children_
std::enable_shared _from_this< SmaccStateInfo >
#id_
map< const std::type _info *, std::vector < smacc2::introspection ::IClientBehaviorInfoEntry > >
#clientBehaviorInfo_
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
#stateReactorsInfo_
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccEventGenerator Info > > >
#eventGeneratorsInfo_
int
#depth_ +stateIndex_
vector< smacc2::introspection ::SmaccTransitionInfo >
#transitions_
string
+demangledStateName +fullStateName
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ mapBehavior()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExitting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
checkStateMachineConsistence()
initializeROS()
onInitialized()
createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
vector< std::vector < smacc2::ISmaccClientBehavior > * >
#clientBehaviors_
mutex
#mutex_
vector< std::shared _ptr< smacc2::ISmaccClient > >
#clients_
boost::signals2::signal < Signature, optional_last _value< typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost::signals2::mutex >
#signal_
shared_ptr< rclcpp ::Logger >
#node_
vector< std::shared _ptr< smacc2::StateReactor > >
#stateReactors_
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
#eventGenerators_
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
onInitialize()
initializeClients()
assignClientToOrthogonal()
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
#components_
smacc2::SmaccSignal < void()>
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
onComponentInitialization()
onOrthogonalAllocation()
onStateOrthogonalAllocation()
createComponent()
createNamedComponent()
getNode()
getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
runtimeConfigure()
postEvent()
postEvent()
getCurrentState()
dispose()
getNode()
getLogger()
- onOrthogonalAllocation()
- onStateOrthogonalAllocation()
optional< std::future < int > >
bool
function< void()>
shared_ptr< movelt ::planning_interface ::MoveGroupInterface >
shared_ptr< movelt ::planning_interface ::PlanningSceneInterface >
Options
smacc2::ISmaccAsyncClient Behavior
+ onOrthogonalAllocation()
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
postSuccessEvent()
postFailureEvent()
dispose()
isShutdownRequested()
- waitFutureIfNotFinished()
cl_movelt2c::ClMovelt2c
+ ClMovelt2c()
+ ClMovelt2c()
+ ~ClMovelt2c()
+ onInitialize()
+ postEventMotionExecution Succeeded()
+ postEventMotionExecution Failed()
+ onOrthogonalAllocation()
+ onMotionExecutionSucceeded()
+ onMotionExecutionFailed()
+ getOptions()
cl_movelt2c::ClMoveEndEffector
+ ClMoveEndEffector()
+ ClMoveEndEffector()
+ onEntry()
moveToAbsolutePose()
PoseStamped
optional< std::string >
vector< std::vector < smacc2::ISmaccUpdatable * > >
atomic< int64_t >
double
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutionMode
vector< smacc2::ISmaccUpdatable * >
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ polling(_ros)
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateEnded()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
-updatableStateElements_
-lastState_
-loop_rate_hz
-and _shutdown_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionMode_
-statusPub_
-updatableClients_
-signalDetector_
-smaccStateMachine_
-stateMachine_
-currentState_
-currentOrthogonal_
-orthogonal_
-components_
-stateMachine_
-currentStateInfo_
-eventGenerators_
-stateInfo_
-clientBehaviors_
-mutex_
-clients_
-node_
-logger_
-stateReactors_
-eventGenerators_
-signal_
-stateMachine_
-info_
-children_
-id_
-clientBehaviorInfo_
-stateReactorsInfo_
-eventGeneratorsInfo_
-depth_ +stateIndex_
-transitions_
-demangledStateName +fullStateName
-orthogonal_
-components_
-currentState_
-currentOrthogonal_
-mutex_
-clients_
+ void()>
+ tip_link_
onEntryThread_ onExitThread_
isShutdownRequested_
postFailureEventFn
postFinishEventFn
postSuccessEventFn_
postEventMotionExecution Failed_ postEventMotionExecution Succeded_
onFailure_ onFinished_ onSuccess_
onFailed_ onSucceed_
moveGroupClientInterface
planningSceneInterface
options_
movegroupClient_
targetPose
group_