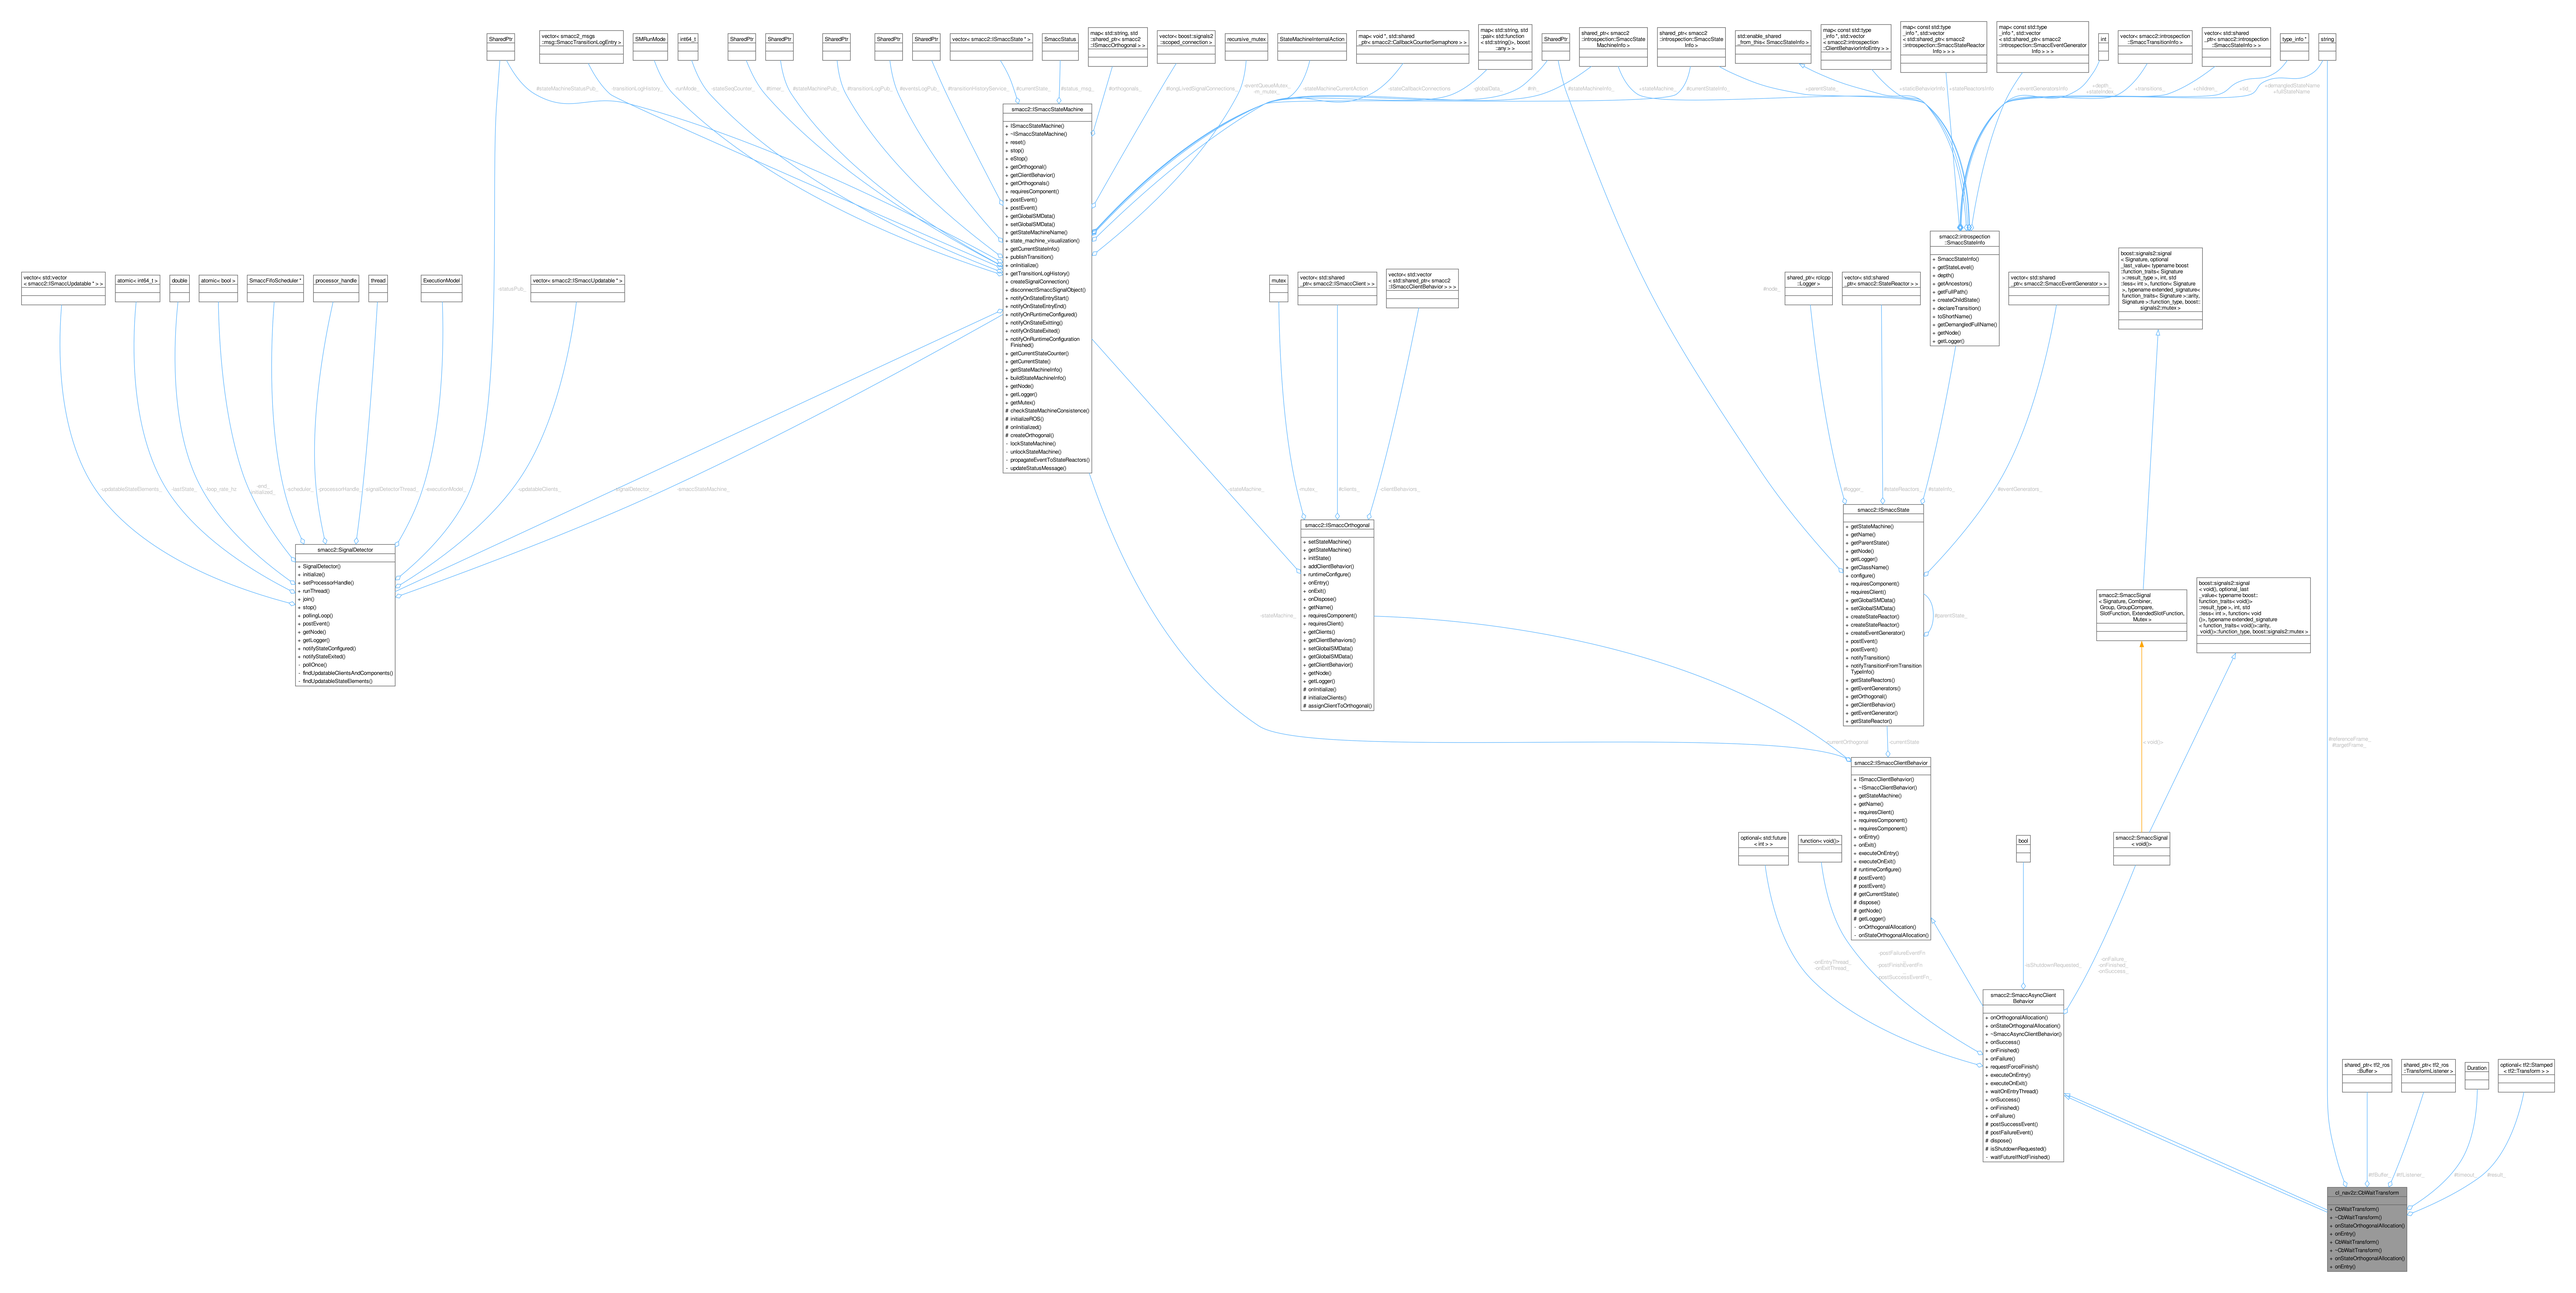

SharedPtr
vector< smacc2_msgs
::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
SharedPtr
SharedPtr
SharedPtr
SharedPtr
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
vector< boost::signals2
::scoped_connection >
recursive_mutex
StateMachineInternalAction
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std
::pair< std::function
< std::string() >, boost
::any > >
SharedPtr
shared_ptr< smacc2
::introspection::SmaccState
MachineInfo >
shared_ptr< smacc2
::introspection::SmaccState
Info >
std::enable_shared
_from_this< SmaccStateInfo >
map< const std::type
_info *, std::vector
< smacc2::introspection
::StateReactorInfo > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccStateReactor
Info > > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccEventGenerator
Info > > >
int
vector< smacc2::introspection
::SmaccTransitionInfo >
vector< std::shared
_ptr< smacc2::introspection
::SmaccStateInfo > >
type_info *
string
#stateMachineStatusPub_
#transitionLogHistory_
#unitMode_
#stateSeqCounter_
#timer_
#stateMachinePub_
#transitionLogPub_
#eventsLogPub_
#transitionHistoryService_
#currentState_
#status_msg_
#orthogonals_
#longLivedSignalConnections_
eventQueueMutex
#m_mutex_
#stateMachineCurrentAction
#stateCallbackConnections
#globalData_
#m_
#stateMachineInfo_
#stateMachine_
#currentStateInfo_
#parentState_
#staticBehaviorInfo
#stateReactorsInfo
#eventGeneratorsInfo
#depth_
#childrenInfos_
#transitions_
#children_
#id_
#demangledStateName
#fullStateName
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration
Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
checkStateMachineConsistence()
initializePOSI()
onInitialized()
createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection
::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
vector< std::shared
_ptr< smacc2::SmaccEventGenerator > >
boost::signals2::signal
< void(), optional_last
_value, typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>, typename extended_signature<
function_traits< Signature >::arity_
, Signature >::function_type, boost::
signals2::mutex >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
mutex
vector< std::shared
_ptr< smacc2::ISmaccClient > >
shared_ptr< rclcpp
::Logger >
vector< std::shared
_ptr< smacc2::StateReactor > >
#mode_
#logger_
#stateReactors_
#stateInfo_
#eventGenerators_
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition
TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#parentState_
smacc2::ISmaccSignal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(), optional_last
_value< typename boost::
function_traits< void()>::arity_
::result_type >, int, std
::less< int >, function< void
()>, typename extended_signature
< function_traits< void()>::arity_,
void()>::function_type, boost::signals2::mutex >
smacc2::ISmaccSignal
< void()>
#< void()>
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
onInitialize()
initializeClients()
assignClientToOrthogonal()
#currentOrthogonal
#currentState
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
runtimeConfigure()
postEvent()
postEvent()
getCurrentState()
dispose()
getNode()
getLogger()
- onOrthogonalAllocation()
- onStateOrthogonalAllocation()
optional< std::future
< int > >
function< void()>
bool
smacc2::SmaccAsyncClient
Behavior
+ onOrthogonalAllocation()
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
postSuccessEvent()
postFailureEvent()
dispose()
isShutdownRequested()
- waitFutureNotFinished()
-onEntryThread_
-onExitThread_
-postFailureEventFn
-postFinishEventFn
-postSuccessEventFn
-isShutdownRequested_
-onFailure_
-onFinished_
-onSuccess_
shared_ptr< tf2_ros
::Buffer >
shared_ptr< tf2_ros
::TransformListener >
Duration
optional< tf2::Stamped
< tf2::Transform > >
#referenceFrame_
#targetFrame_
#tfBuffer_
#tfListener_
#timeout_
#result_
ct_nav2z::CbWaitTransform
+ CbWaitTransform()
+ ~CbWaitTransform()
+ onStateOrthogonalAllocation()
+ onEntry()
- CbWaitTransform()
- ~CbWaitTransform()
- onStateOrthogonalAllocation()
+ onEntry()
vector< std::ISmaccUpdatable * > >
atomic< int64_t >
double
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
-updatableStateElements_
-lastState_
-loop_rate_hz
-end
-initialized_
-scheduler
-processorHandle_
-signalDetectorThread_
-executionMode
-statusPub_
-updatableClients_
-signalDetector_
-smaccStateMachine_
-stateMachine_
-mutex_
-clients_
-clientBehaviors_
-stateMachine_