


```
boost::statechart::  
event< EvTopicMessage  
< TSource, TOrthogonal,  
typename TSource::TMessageType > >
```

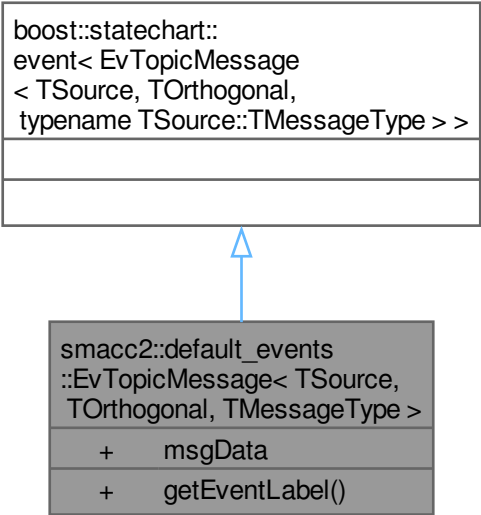

The diagram shows a class hierarchy. The top class, `boost::statechart::event`, is a template class with parameters `EvTopicMessage`, `TSource`, `TOrthogonal`, and `TMessageType`. The bottom class, `smacc2::default_events::EvTopicMessage`, inherits from the top class, as indicated by a blue arrow with an open triangle head. The bottom class has two public methods: `msgData` and `getEventLabel()`.

```
smacc2::default_events  
::EvTopicMessage< TSource,  
TOrthogonal, TMessageType >
```

```
+ msgData
```

```
+ getEventLabel()
```