


```
boost::statechart::  
event< EvActionCancelled  
< TSource, TOrthogonal > >
```

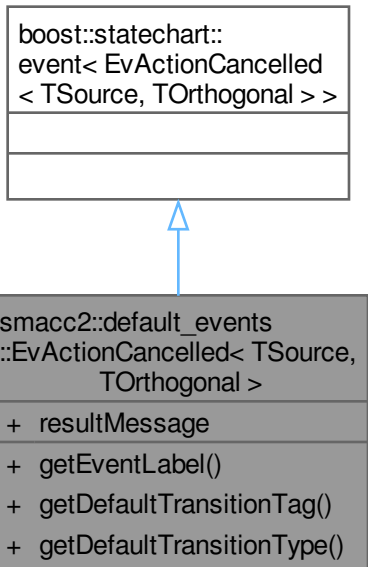

The diagram shows a class hierarchy. The base class, `boost::statechart::event< EvActionCancelled< TSource, TOrthogonal > >`, is represented by a white box with a black border. It has two empty rectangular compartments below the header. The derived class, `smacc2::default_events::EvActionCancelled< TSource, TOrthogonal >`, is represented by a grey box with a black border. It has a header compartment followed by three compartments containing the methods `+ resultMessage`, `+ getEventLabel()`, `+ getDefaultTransitionTag()`, and `+ getDefaultTransitionType()`. A blue arrow with an open triangular head points from the top of the derived class box to the bottom of the base class box, indicating inheritance.

```
smacc2::default_events  
::EvActionCancelled< TSource,  
TOrthogonal >
```

```
+ resultMessage
```

```
+ getEventLabel()
```

```
+ getDefaultTransitionTag()
```

```
+ getDefaultTransitionType()
```