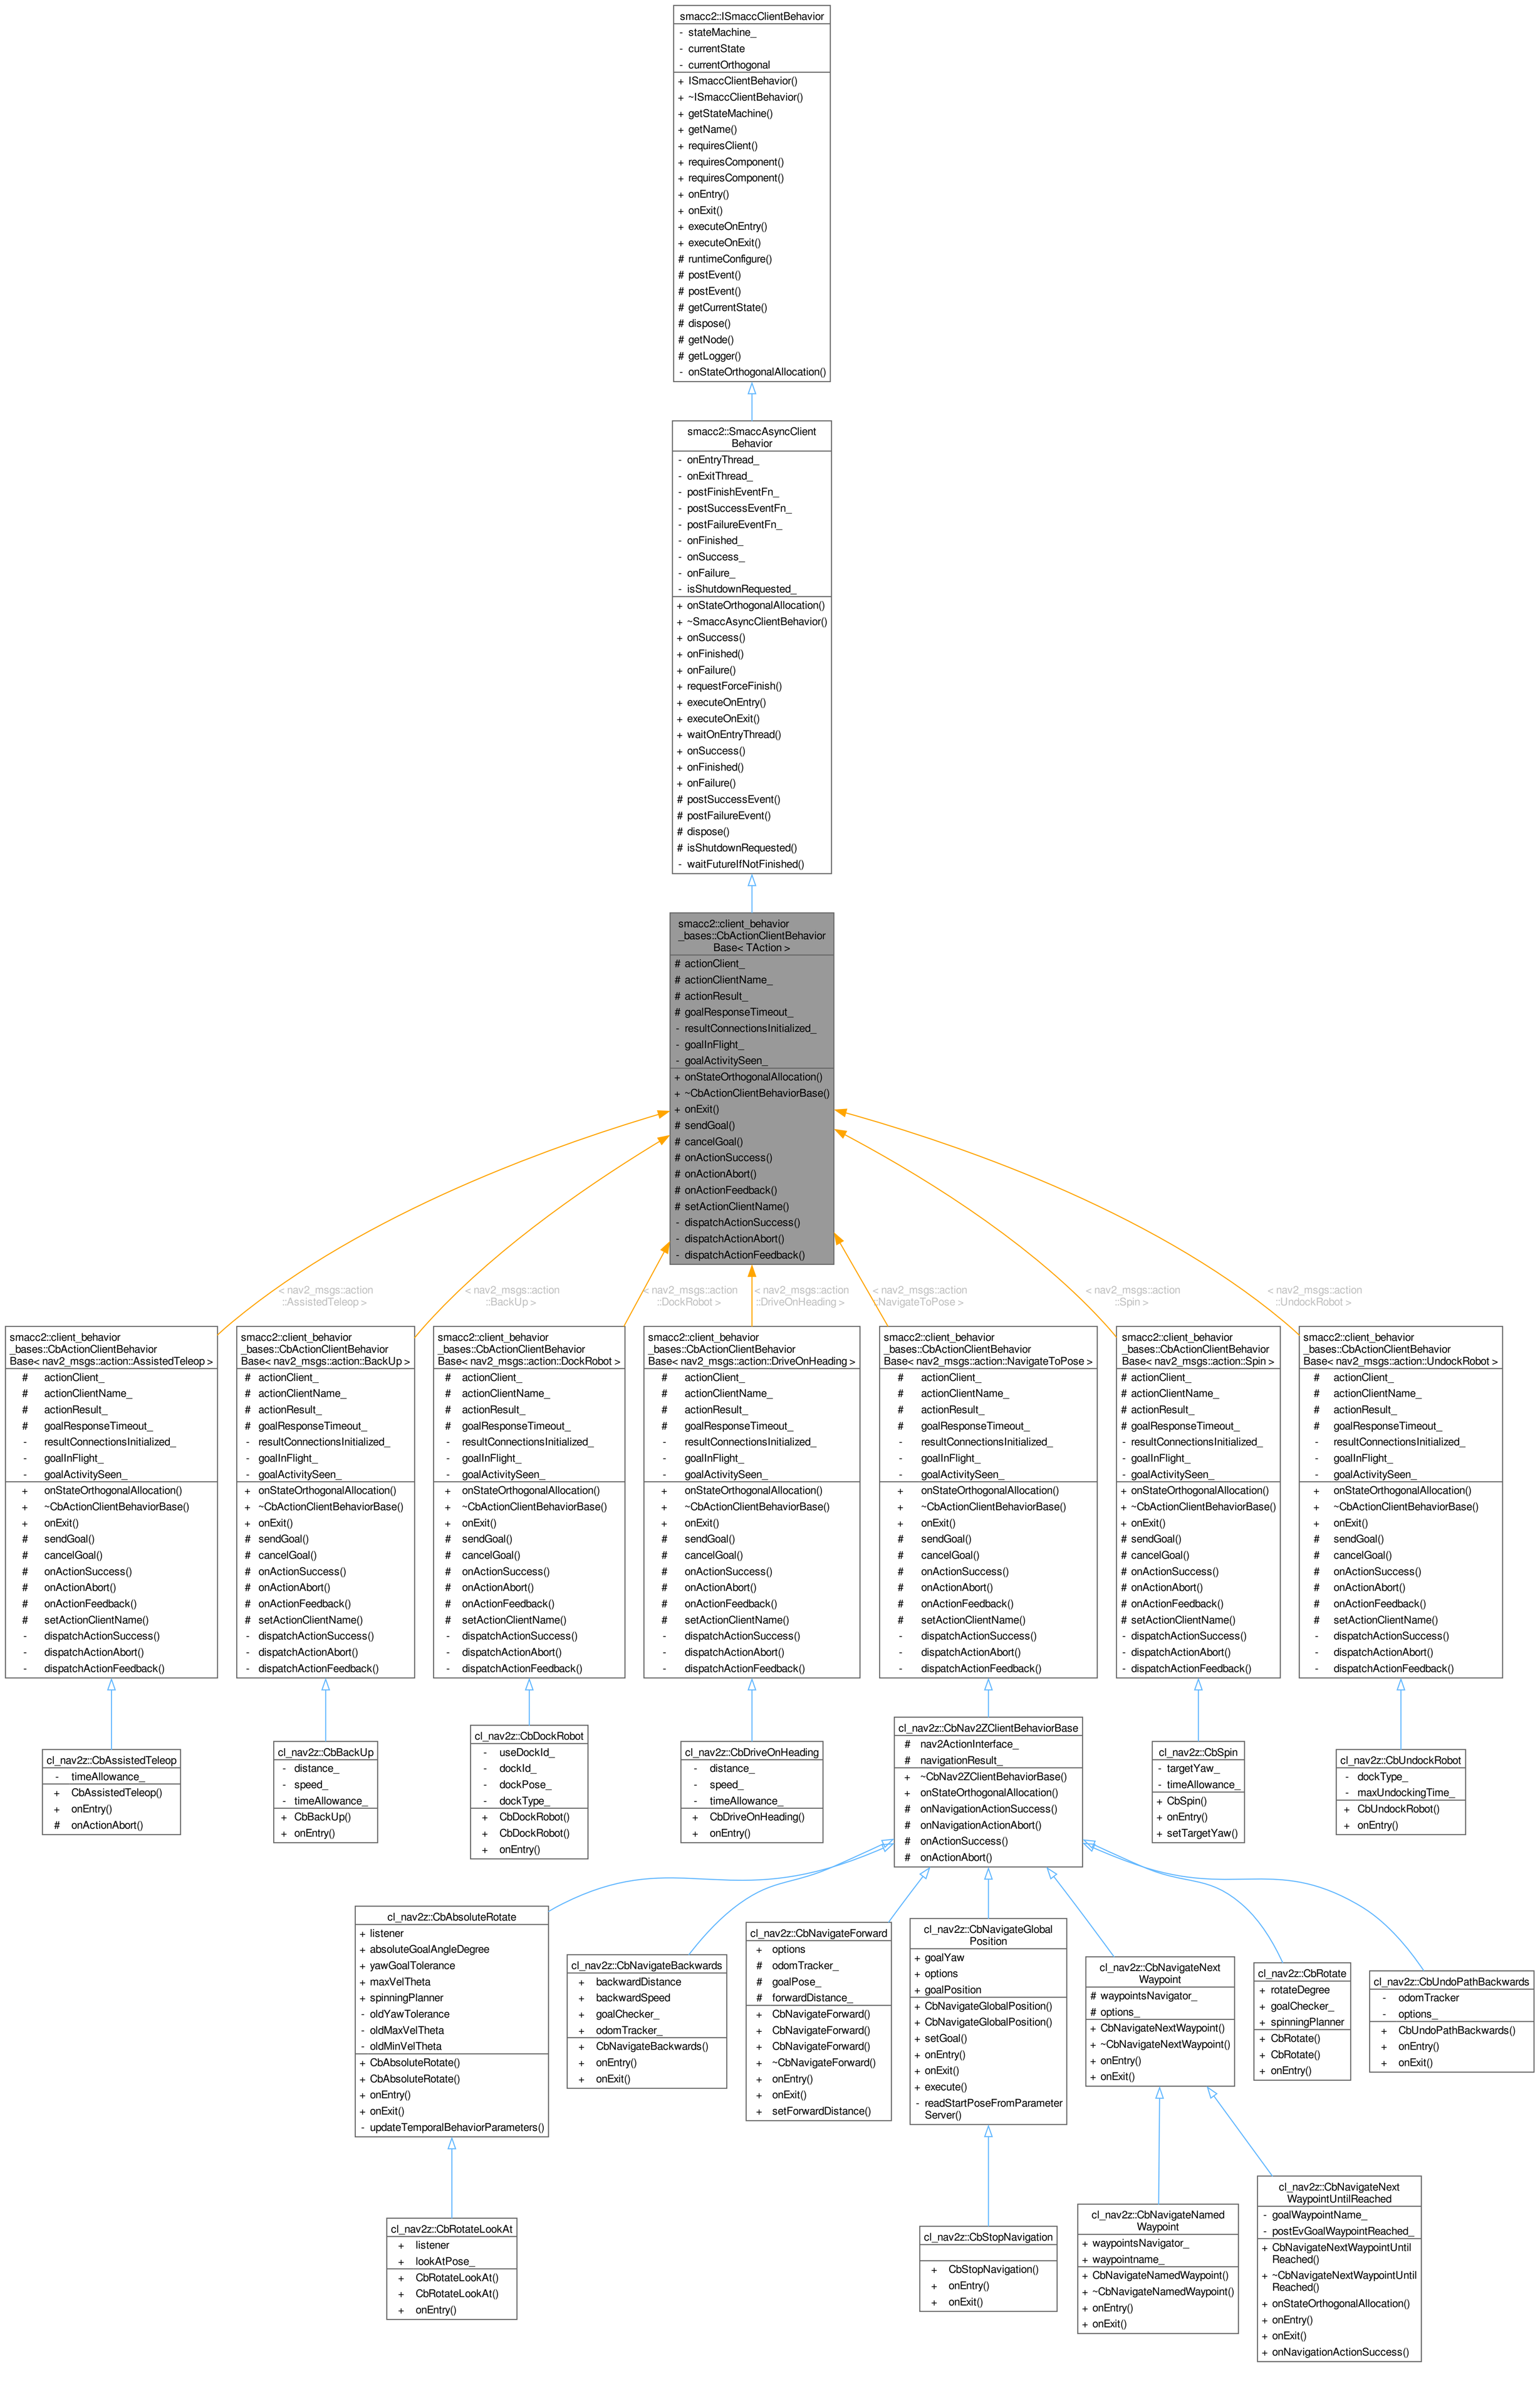
smacc2::ISmaccClientBehavior
- stateMachine_
- currentState
- currentOrthogonal
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
smacc2::SmaccAsyncClient Behavior
- onEntryThread_
- onExitThread_
- postFinishEventFn_
- postSuccessEventFn_
- postFailureEventFn_
- onFinished_
- onSuccess_
- onFailure_
- isShutdownRequested_
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::client_behavior _bases::CbActionClientBehavior Base< TAction >
# actionClient_
# actionClientName_
# actionResult_
# goalResponseTimeout_
- resultConnectionsInitialized_
- goalInFlight_
- goalActivitySeen_
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
< nav2_msgs::action ::AssistedTeleop >
< nav2_msgs::action ::BackUp >
< nav2_msgs::action ::DockRobot >
< nav2_msgs::action ::DriveOnHeading >
< nav2_msgs::action ::NavigateToPose >
< nav2_msgs::action ::Spin >
< nav2_msgs::action ::UndockRobot >
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::AssistedTeleop >
# actionClient_
# actionClientName_
# actionResult_
# goalResponseTimeout_
- resultConnectionsInitialized_
- goalInFlight_
- goalActivitySeen_
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::BackUp >
# actionClient_
# actionClientName_
# actionResult_
# goalResponseTimeout_
- resultConnectionsInitialized_
- goalInFlight_
- goalActivitySeen_
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::DockRobot >
# actionClient_
# actionClientName_
# actionResult_
# goalResponseTimeout_
- resultConnectionsInitialized_
- goalInFlight_
- goalActivitySeen_
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::DriveOnHeading >
# actionClient_
# actionClientName_
# actionResult_
# goalResponseTimeout_
- resultConnectionsInitialized_
- goalInFlight_
- goalActivitySeen_
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::NavigateToPose >
# actionClient_
# actionClientName_
# actionResult_
# goalResponseTimeout_
- resultConnectionsInitialized_
- goalInFlight_
- goalActivitySeen_
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::Spin >
# actionClient_
# actionClientName_
# actionResult_
# goalResponseTimeout_
- resultConnectionsInitialized_
- goalInFlight_
- goalActivitySeen_
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::UndockRobot >
# actionClient_
# actionClientName_
# actionResult_
# goalResponseTimeout_
- resultConnectionsInitialized_
- goalInFlight_
- goalActivitySeen_
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
cl_nav2z::CbAssistedTeleop
- timeAllowance_
+ CbAssistedTeleop()
+ onEntry()
# onActionAbort()
cl_nav2z::CbBackUp
- distance_
- speed_
- timeAllowance_
+ CbBackUp()
+ onEntry()
cl_nav2z::CbDockRobot
- useDockId_
- dockId_
- dockPose_
- dockType_
+ CbDockRobot()
+ CbDockRobot()
+ onEntry()
cl_nav2z::CbDriveOnHeading
- distance_
- speed_
- timeAllowance_
+ CbDriveOnHeading()
+ onEntry()
cl_nav2z::CbNav2ZClientBehaviorBase
# nav2ActionInterface_
# navigationResult_
+ ~CbNav2ZClientBehaviorBase()
+ onStateOrthogonalAllocation()
# onNavigationActionSuccess()
# onNavigationActionAbort()
# onActionSuccess()
# onActionAbort()
cl_nav2z::CbSpin
- targetYaw_
- timeAllowance_
+ CbSpin()
+ onEntry()
+ setTargetYaw()
cl_nav2z::CbUndockRobot
- dockType_
- maxUndockingTime_
+ CbUndockRobot()
+ onEntry()
cl_nav2z::CbAbsoluteRotate
+ listener
+ absoluteGoalAngleDegree
+ yawGoalTolerance
+ maxVelTheta
+ spinningPlanner
- oldYawTolerance
- oldMaxVelTheta
- oldMinVelTheta
+ CbAbsoluteRotate()
+ CbAbsoluteRotate()
+ onEntry()
+ onExit()
- updateTemporalBehaviorParameters()
cl_nav2z::CbNavigateBackwards
+ backwardDistance
+ backwardSpeed
+ goalChecker_
+ odomTracker_
+ CbNavigateBackwards()
+ onEntry()
+ onExit()
cl_nav2z::CbNavigateForward
+ options
# odomTracker_
# goalPose_
# forwardDistance_
+ CbNavigateForward()
+ CbNavigateForward()
+ CbNavigateForward()
+ ~CbNavigateForward()
+ onEntry()
+ onExit()
+ setForwardDistance()
cl_nav2z::CbNavigateGlobal Position
+ goalYaw
+ options
+ goalPosition
+ CbNavigateGlobalPosition()
+ CbNavigateGlobalPosition()
+ setGoal()
+ onEntry()
+ onExit()
+ execute()
- readStartPoseFromParameter Server()
cl_nav2z::CbNavigateNext Waypoint
# waypointsNavigator_
# options_
+ CbNavigateNextWaypoint()
+ ~CbNavigateNextWaypoint()
+ onEntry()
+ onExit()
cl_nav2z::CbRotate
+ rotateDegree
+ goalChecker_
+ spinningPlanner
+ CbRotate()
+ CbRotate()
+ onEntry()
cl_nav2z::CbUndoPathBackwards
- odomTracker
- options_
+ CbUndoPathBackwards()
+ onEntry()
+ onExit()
cl_nav2z::CbRotateLookAt
+ listener
+ lookAtPose_
+ CbRotateLookAt()
+ CbRotateLookAt()
+ onEntry()
cl_nav2z::CbStopNavigation
+ CbStopNavigation()
+ onEntry()
+ onExit()
cl_nav2z::CbNavigateNamed Waypoint
+ waypointsNavigator_
+ waypointname_
+ CbNavigateNamedWaypoint()
+ ~CbNavigateNamedWaypoint()
+ onEntry()
+ onExit()
cl_nav2z::CbNavigateNext WaypointUntilReached
- goalWaypointName_
- postEvGoalWaypointReached_
+ CbNavigateNextWaypointUntil Reached()
+ ~CbNavigateNextWaypointUntil Reached()
+ onStateOrthogonalAllocation()
+ onEntry()
+ onExit()
+ onNavigationActionSuccess()