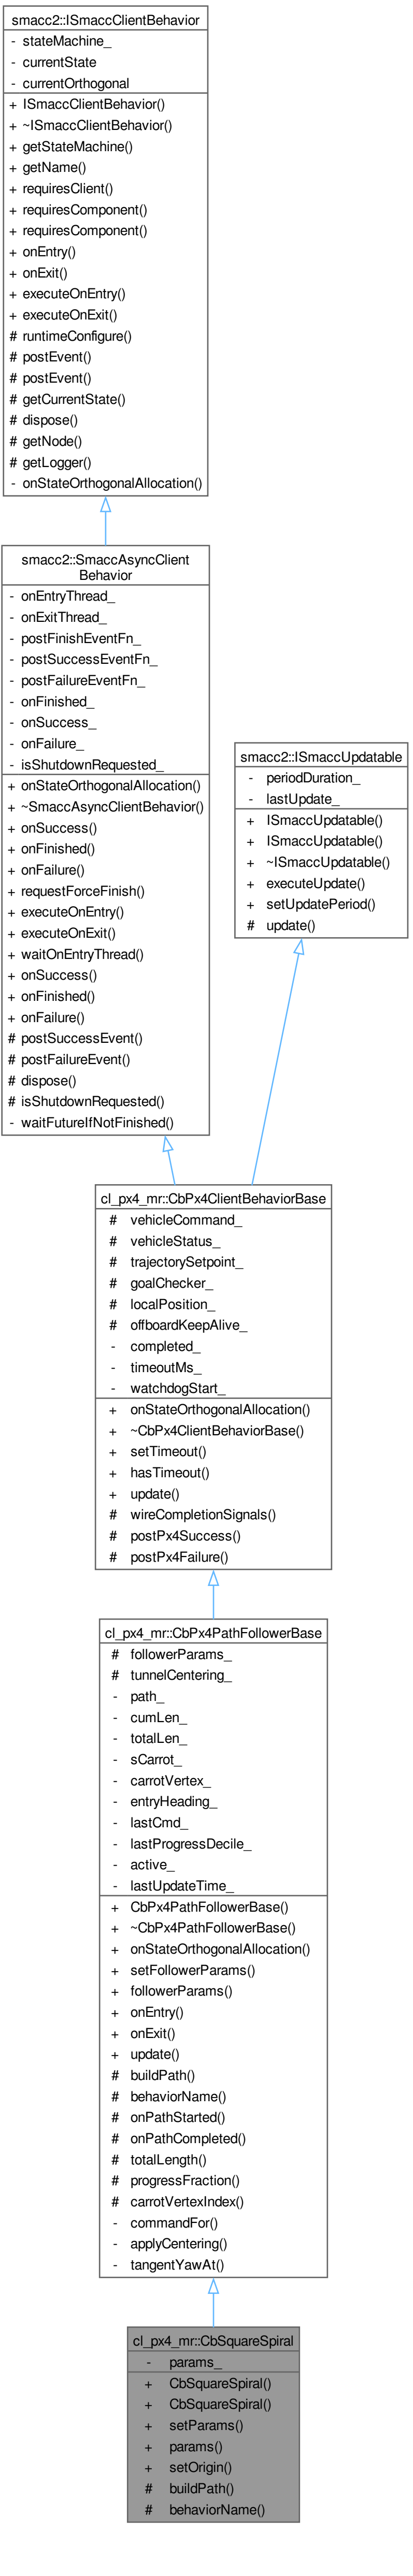
smacc2::ISmaccClientBehavior
- stateMachine_
- currentState
- currentOrthogonal
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
smacc2::SmaccAsyncClient Behavior
- onEntryThread_
- onExitThread_
- postFinishEventFn_
- postSuccessEventFn_
- postFailureEventFn_
- onFinished_
- onSuccess_
- onFailure_
- isShutdownRequested_
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::ISmaccUpdatable
- periodDuration_
- lastUpdate_
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
cl_px4_mr::CbPx4ClientBehaviorBase
# vehicleCommand_
# vehicleStatus_
# trajectorySetpoint_
# goalChecker_
# localPosition_
# offboardKeepAlive_
- completed_
- timeoutMs_
- watchdogStart_
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
cl_px4_mr::CbPx4PathFollowerBase
# followerParams_
# tunnelCentering_
- path_
- cumLen_
- totalLen_
- sCarrot_
- carrotVertex_
- entryHeading_
- lastCmd_
- lastProgressDecile_
- active_
- lastUpdateTime_
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
cl_px4_mr::CbSquareSpiral
- params_
+ CbSquareSpiral()
+ CbSquareSpiral()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()