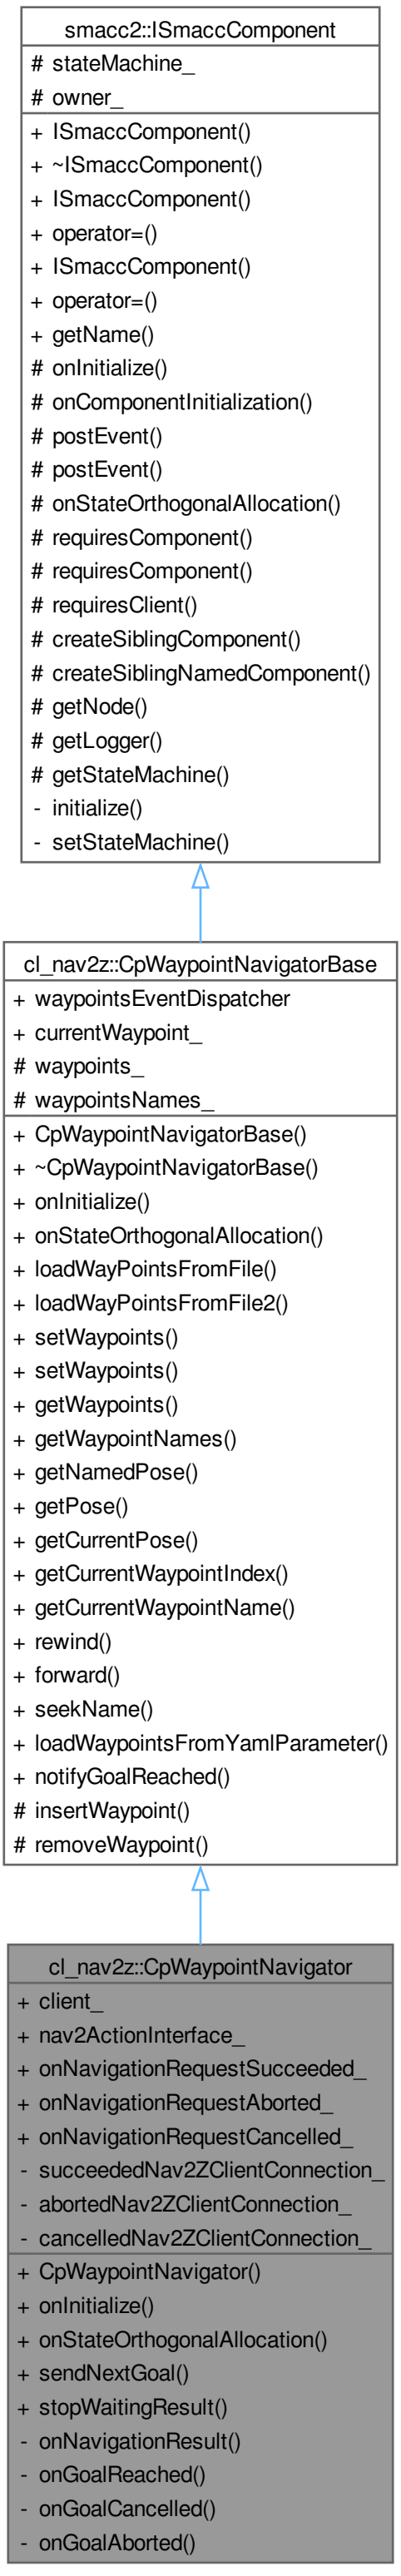
smacc2::ISmaccComponent
stateMachine_
owner_
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
cl_nav2z::CpWaypointNavigatorBase
+ waypointsEventDispatcher
+ currentWaypoint_
# waypoints_
# waypointsNames_
+ CpWaypointNavigatorBase()
+ ~CpWaypointNavigatorBase()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ loadWayPointsFromFile()
+ loadWayPointsFromFile2()
+ setWaypoints()
+ setWaypoints()
+ getWaypoints()
+ getWaypointNames()
+ getNamedPose()
+ getPose()
+ getCurrentPose()
+ getCurrentWaypointIndex()
+ getCurrentWaypointName()
+ rewind()
+ forward()
+ seekName()
+ loadWaypointsFromYamlParameter()
+ notifyGoalReached()
# insertWaypoint()
# removeWaypoint()
cl_nav2z::CpWaypointNavigator
+ client_
+ nav2ActionInterface_
+ onNavigationRequestSucceeded_
+ onNavigationRequestAborted_
+ onNavigationRequestCancelled_
- succeededNav2ZClientConnection_
- abortedNav2ZClientConnection_
- cancelledNav2ZClientConnection_
+ CpWaypointNavigator()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ sendNextGoal()
+ stopWaitingResult()
- onNavigationResult()
- onGoalReached()
- onGoalCancelled()
- onGoalAborted()