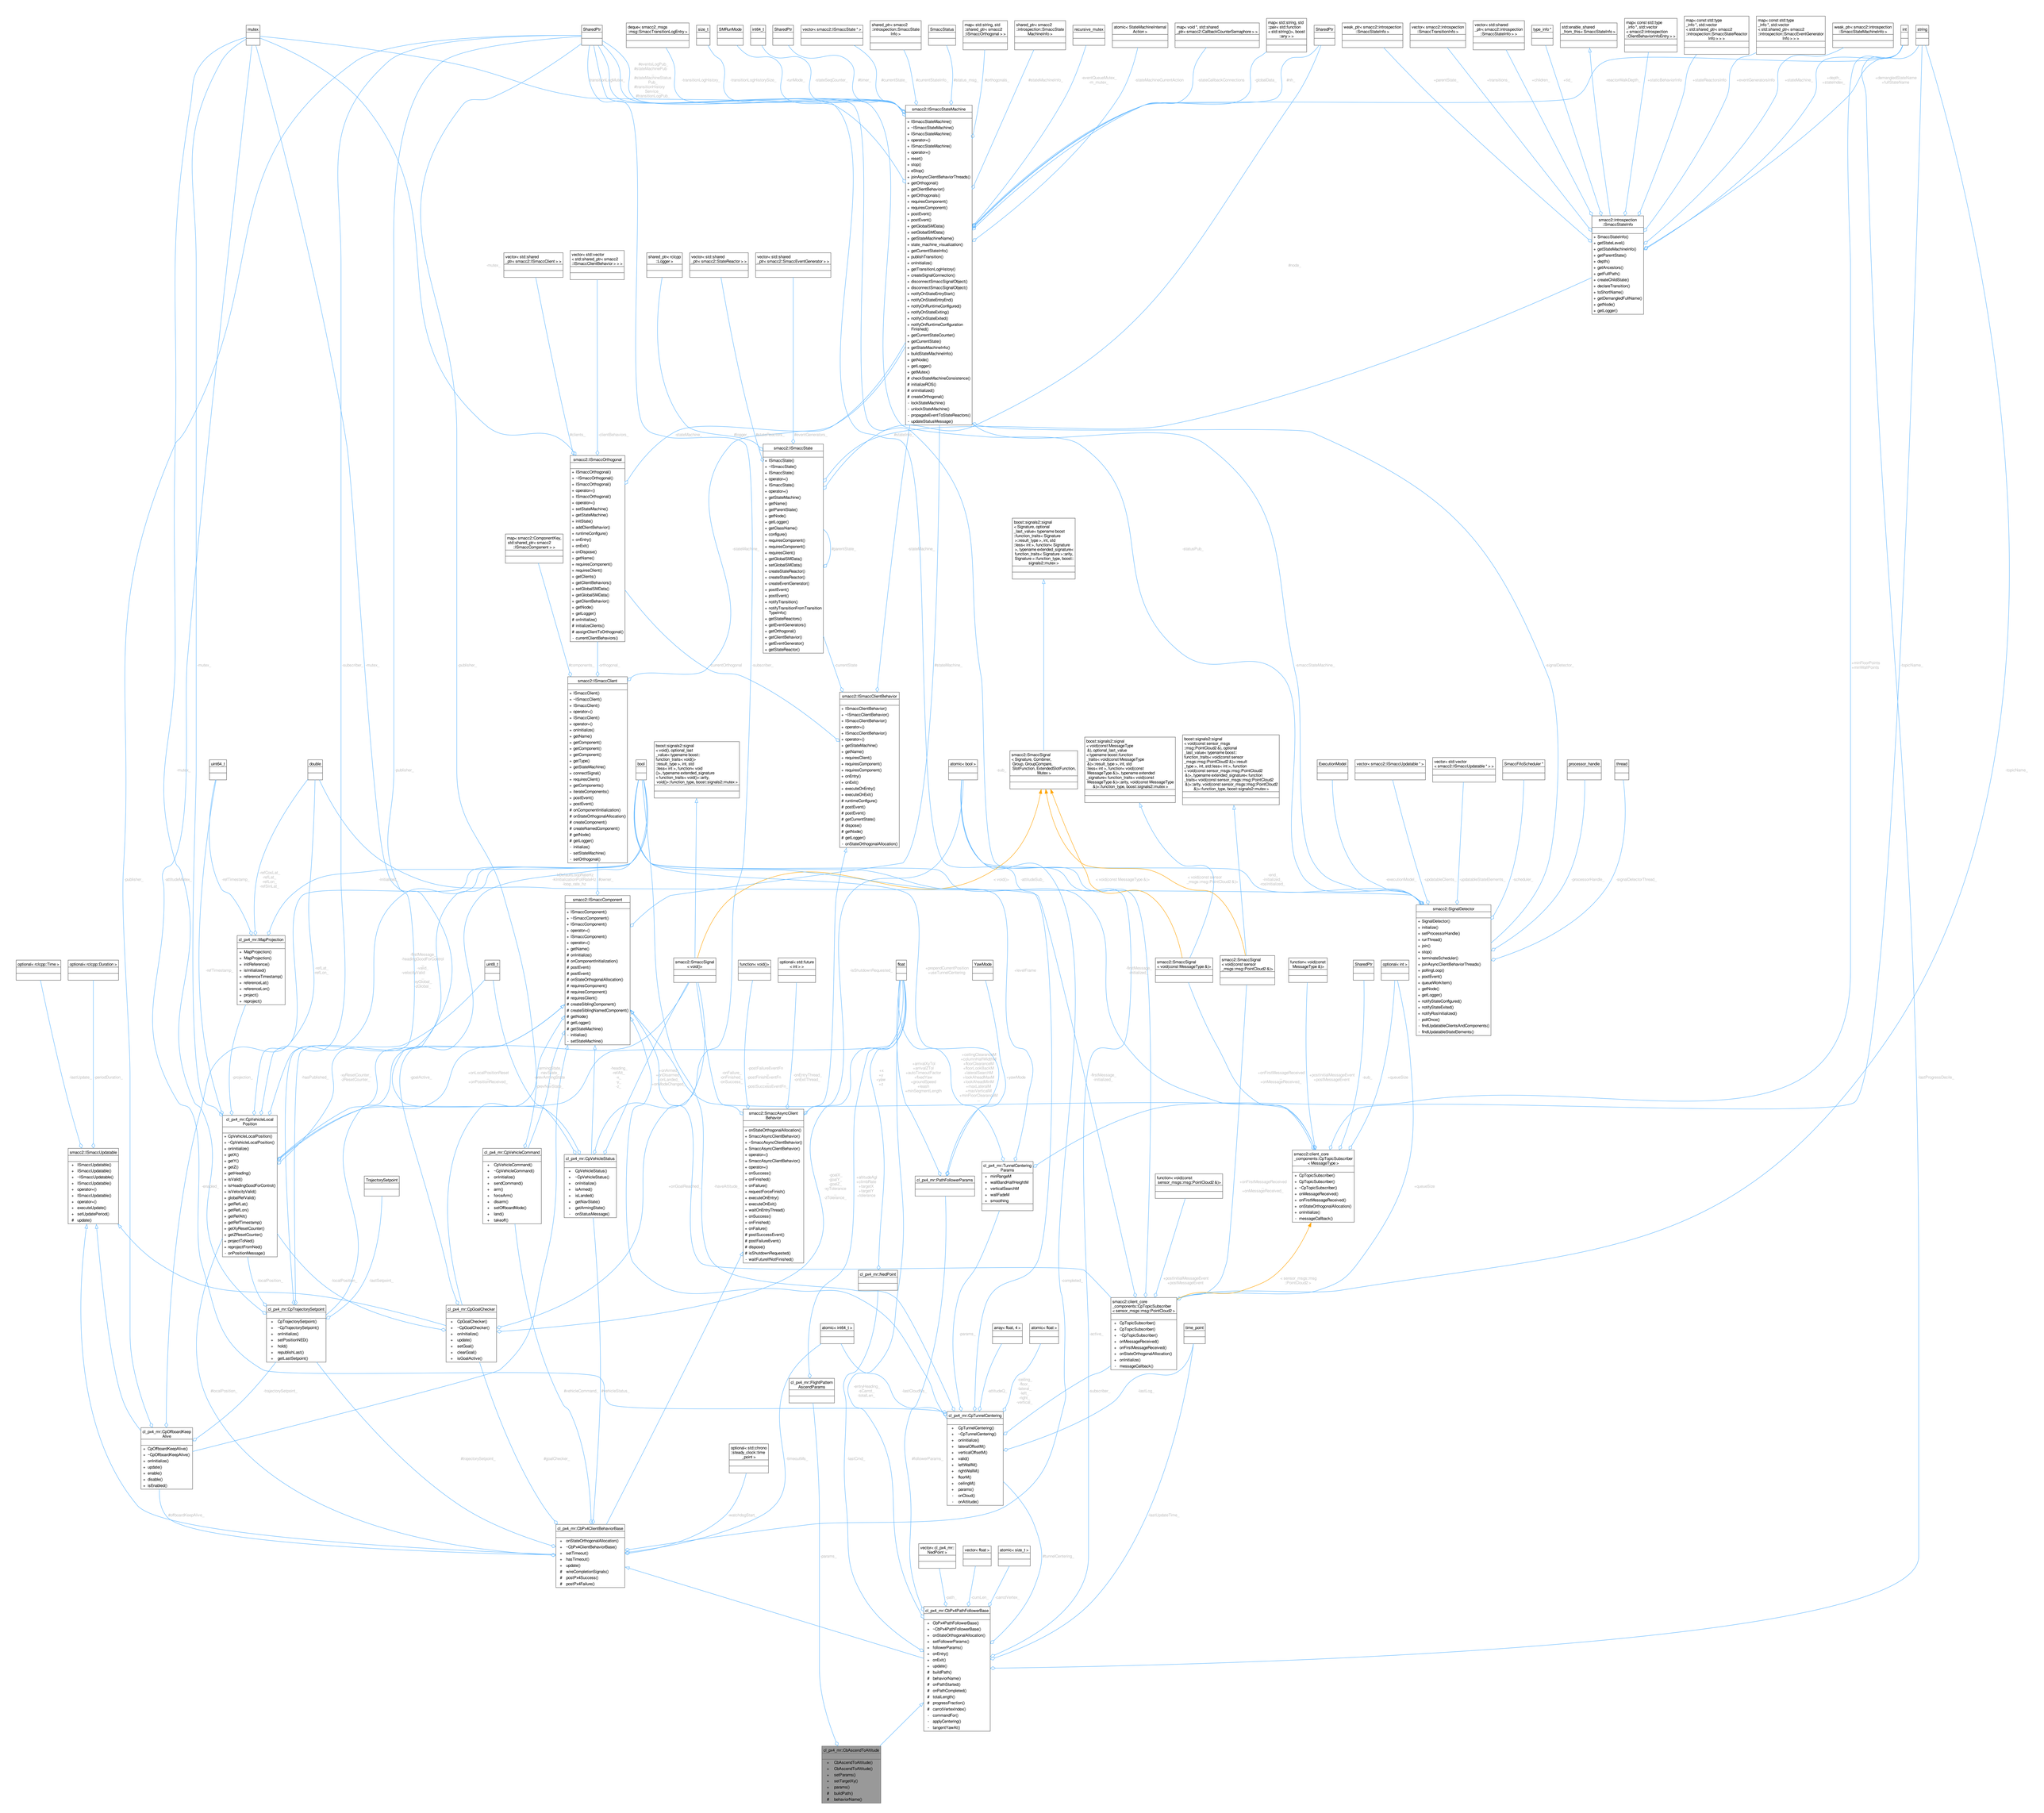

mutex
SharedPtr
deque< smacc2__msgs
::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2
::introspection::SmaccState
Info >
SmaccStatus
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
shared_ptr< smacc2
::introspection::SmaccState
MachineInfo >
recursive_mutex
atomic< StateMachineInternal
Action >
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std
::pair< std::function
< std::string()>, boost
::any > >
SharedPtr
weak_ptr< smacc2::introspection
::SmaccStateInfo >
vector< smacc2::introspection
::SmaccTransitionInfo >
vector< shared_ptr< smacc2::introspection
::SmaccStateInfo > >
type_info *
set< enable_shared
_from_this< SmaccStateInfo > >
map< const std::type
_info *, std::vector
< smacc2::introspection
::ClientBehaviorInfo*>* >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccStateReactor
Info > > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccEventGenerator
Info > > >
weak_ptr< smacc2::introspection
::SmaccStateMachineInfo >
int
string
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ stop()
+ eStop()
+ pinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration
Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfos()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
checkStateMachineConsistence()
initializeROS()
onInitialized()
createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection
::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
shared_ptr< rclcpp
::Logger >
vector< std::shared
_ptr< smacc2::IStateReactor > >
vector< std::shared
_ptr< smacc2::ISmaccEventGenerator > >
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
onInitialize()
initializeClients()
assignClientToOrthogonal()
- currentClientBehaviors()
smacc2::ISmaccState
+ ISmaccState()
+ ~ISmaccState()
+ ISmaccState()
+ operator=()
+ ISmaccState()
+ operator=()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition
TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
boost::signals2::signal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(const MessageType
&)>::slot_type
boost::signals2::signal
< void(const sensor_msgs
::msg::PointCloud2 &),
boost::signals2::optional_last_value
< void >, int, std::less< int >,
std::function< void(const sensor_msgs::msg::PointCloud2
&)>, boost::signals2::mutex >
ExecutionMode
vector< smacc2::ISmaccUpdatable * >
vector< std::vector
< smacc2::ISmaccUpdatable * > >
SmaccFifoScheduler *
processor_handle
thread
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateEsfalled()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ ISmaccUpdatable()
+ operator=()
+ ISmaccUpdatable()
+ operator=()
+ update()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingInGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
cl_px4_mr::CpVehicleLocal
Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
cl_px4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
TrajectorySetpoint
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_px4_mr::CpOffboardKeep
Alive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
onComponentInitialization()
onStateOrthogonalAllocation()
createComponent()
createNamedComponent()
getNode()
getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponents()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
runtimeConfigure()
postEvent()
postEvent()
getCurrentState()
dispose()
getNode()
getLogger()
- onStateOrthogonalAllocation()
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
+ onInitialize()
postEvent()
postEvent()
onStateOrthogonalAllocation()
requiresComponent()
requiresClient()
createSiblingComponent()
createSiblingNamedComponent()
getNode()
getLogger()
getStateMachine()
- initialize()
- setStateMachine()
smacc2::ISmaccAsyncClient
Behavior
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
postSuccessEvent()
postFailureEvent()
dispose()
isShutdownRequested()
- waitFutureIsNotFinished()
cl_px4_mr::CpPathFollowerParams
cl_px4_mr::CpTunnelCentering
Params
+ minRangeM
+ waitBandHalfHeightM
+ verticalSearchM
+ waitFadeM
+ smoothing
function< void(const
sensor_msgs::msg::PointCloud2 &)>
smacc2::client_core
_components::CpTopicSubscriber
< MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
cl_px4_mr::NedPoint
smacc2::client_core
_components::CpTopicSubscriber
< sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
time_point
atomic< int64_t >
atomic< float >
array< float, 4 >
cl_px4_mr::FlightPattern
AscendParams
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWidthM()
+ rightWidthM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
optional< std::chrono
::steady_clock::time
_point >
cl_px4_mr::ClPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~ClPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
wireCompletionSignals()
postPx4Success()
postPx4Failure()
vector< cl_px4_mr::
NedPoint >
vector< float >
atomic< size_t >
cl_px4_mr::ClPx4PathFollowerBase
+ ClPx4PathFollowerBase()
+ ~ClPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
buildPath()
behaviorName()
onPathStarted()
onPathCompleted()
totalLength()
progressFraction()
carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawRad()
cl_px4_mr::ClpAscendToAltitude
+ ClpAscendToAltitude()
+ ClpAscendToAltitude()
+ setParams()
+ setTargetXyz()
+ params()
buildPath()
behaviorName()
cl_px4_mr::MapProjection
+ MapProjection()
+ MapProjection()
+ initReference()
+ isInitialized()
+ referenceTimestamp()
+ referenceLat()
+ referenceLon()
+ project()
+ reproject()
optional< rclcpp::Time >
optional< rclcpp::Duration >
uint8_t
double
bool