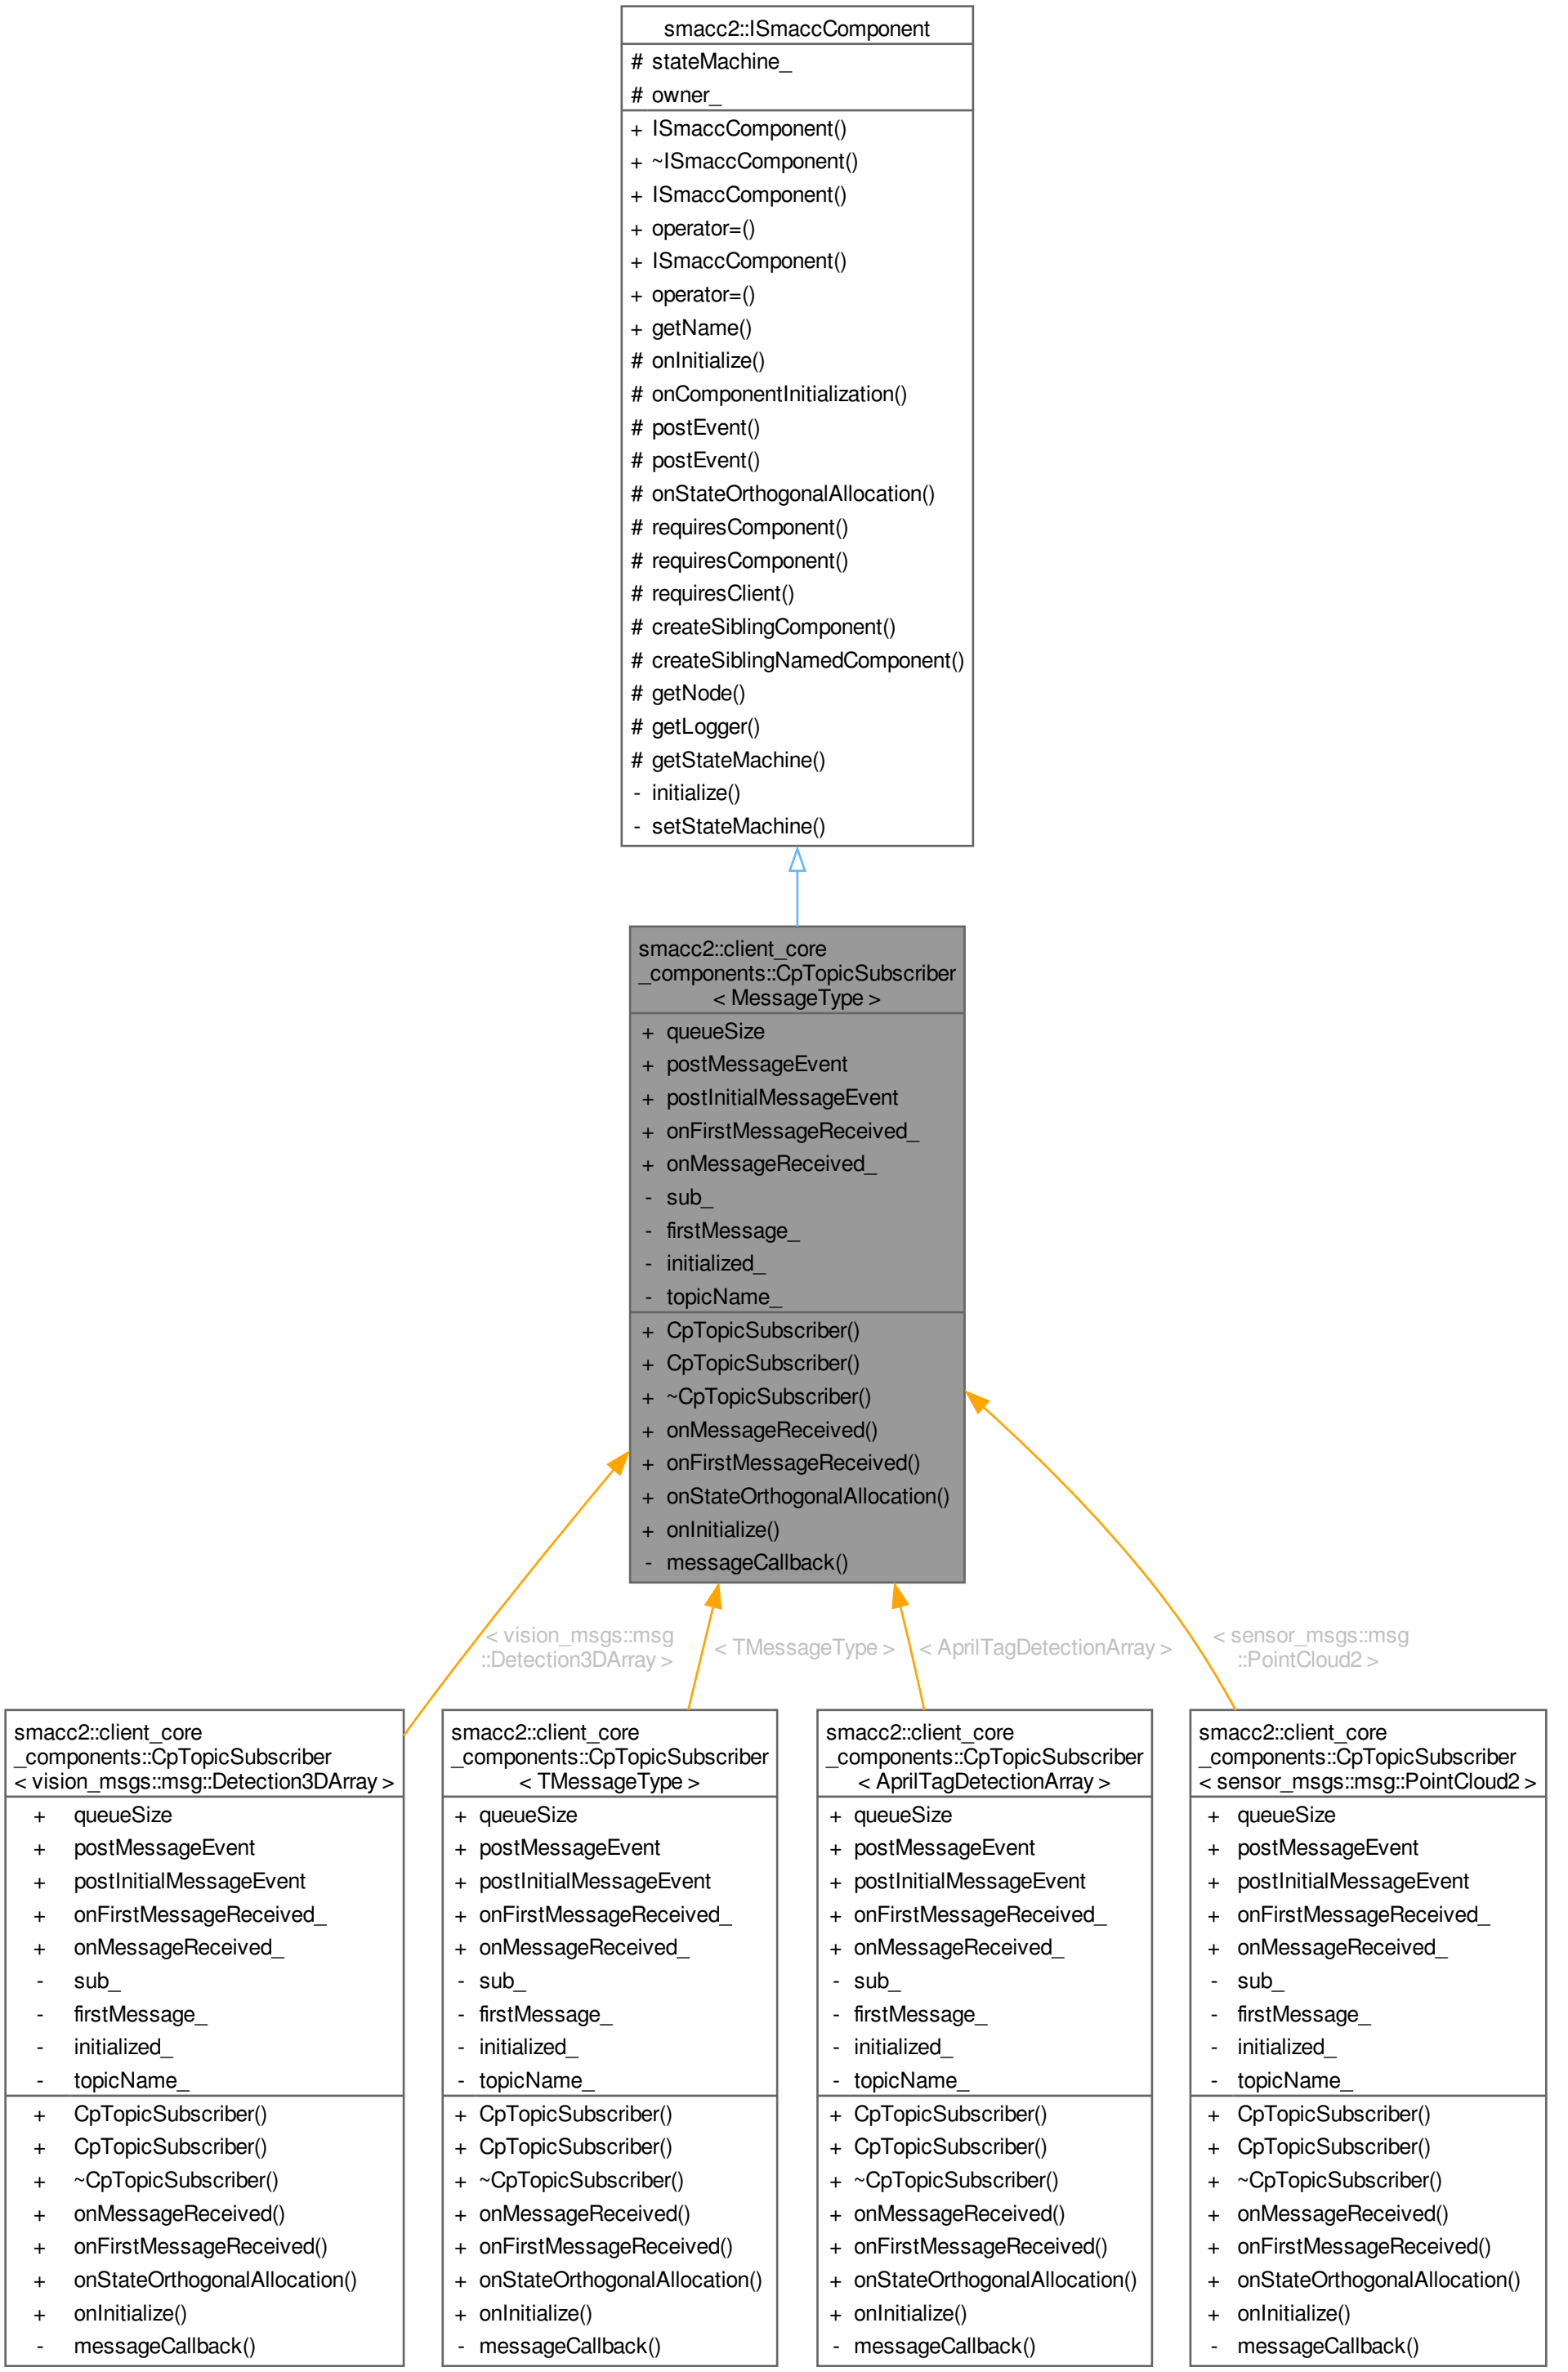
smacc2::ISmaccComponent
stateMachine_
owner_
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
smacc2::client_core _components::CpTopicSubscriber < MessageType >
+ queueSize
+ postMessageEvent
+ postInitialMessageEvent
+ onFirstMessageReceived_
+ onMessageReceived_
- sub_
- firstMessage_
- initialized_
- topicName_
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
< vision_msgs::msg ::Detection3DArray >
< TMessageType >
< AprilTagDetectionArray >
< sensor_msgs::msg ::PointCloud2 >
smacc2::client_core _components::CpTopicSubscriber < vision_msgs::msg::Detection3DArray >
smacc2::client_core _components::CpTopicSubscriber < TMessageType >
smacc2::client_core _components::CpTopicSubscriber < AprilTagDetectionArray >
smacc2::client_core _components::CpTopicSubscriber < sensor_msgs::msg::PointCloud2 >