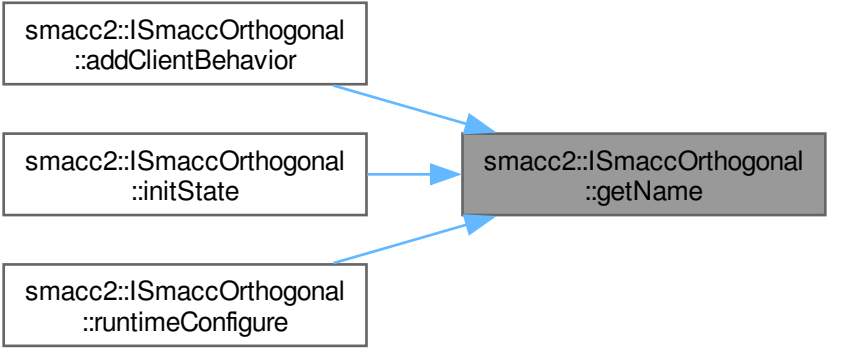
smacc2::ISmaccOrthogonal
::addClientBehavior
smacc2::ISmaccOrthogonal
::initState
smacc2::ISmaccOrthogonal
::runtimeConfigure
smacc2::ISmaccOrthogonal
::getName