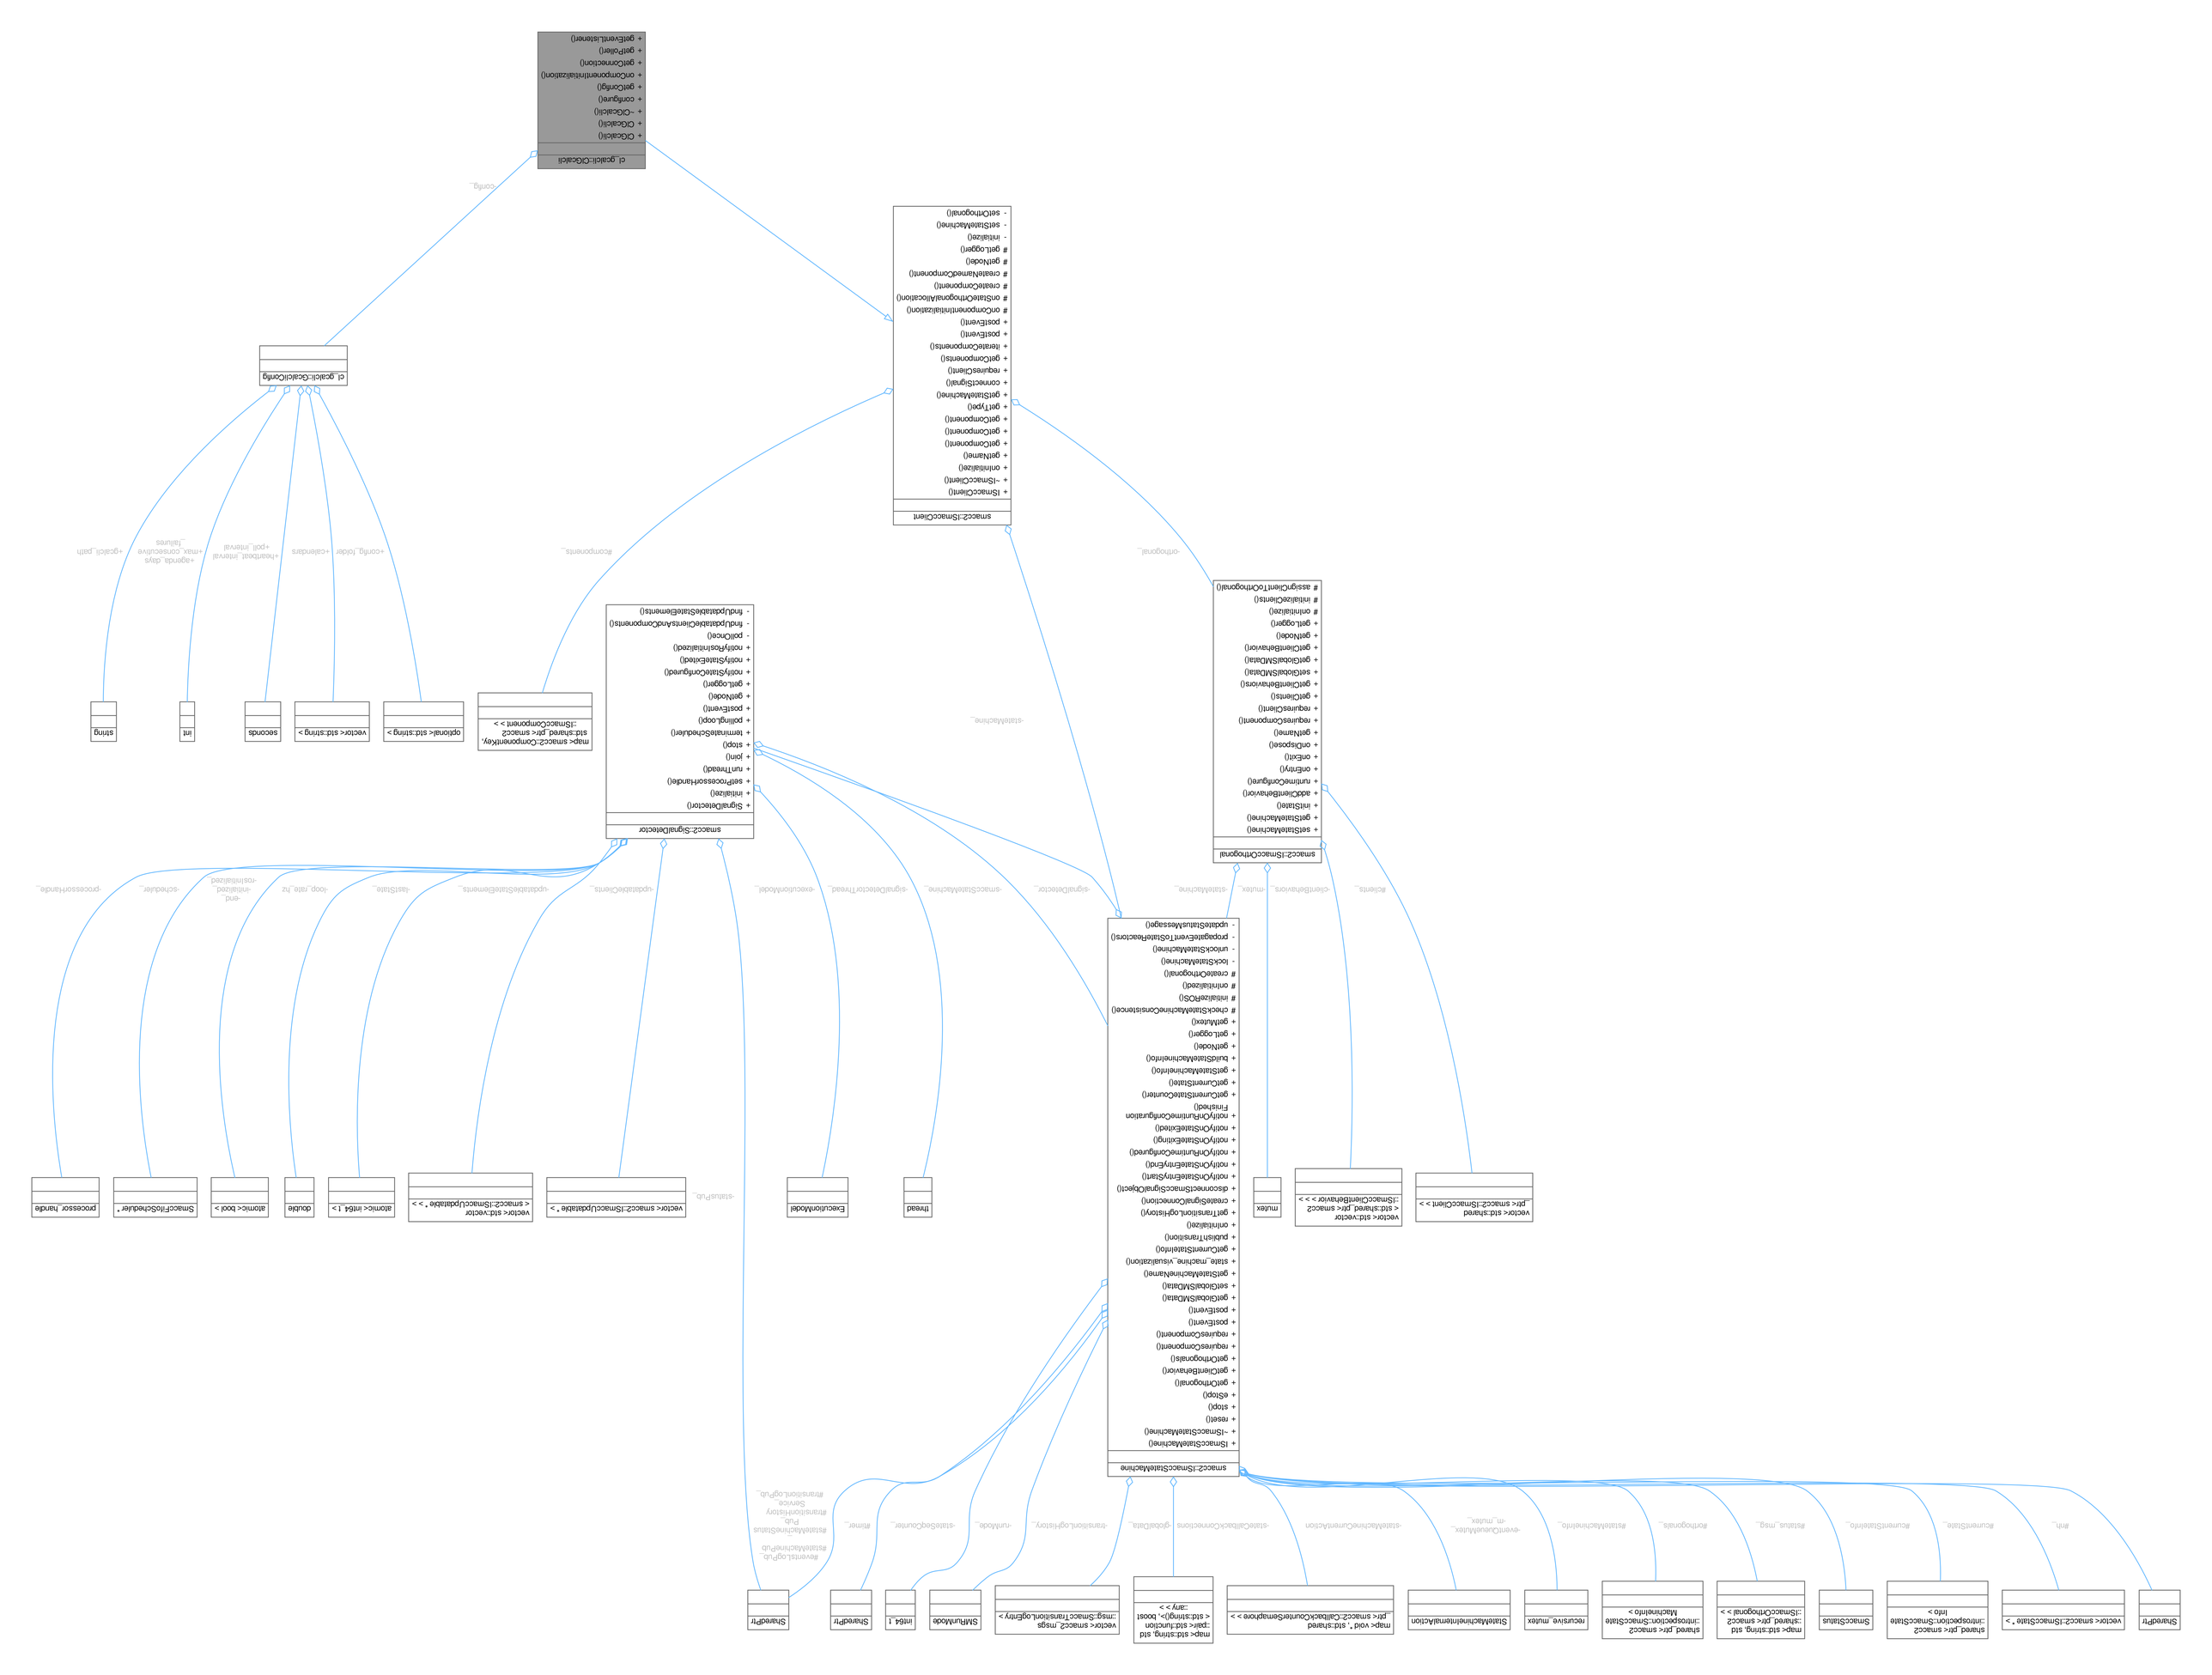
cl_gcalcli::GcalcliConfig
+ GcalcliConfig()
+ GcalcliConfig()
+ ~GcalcliConfig()
+ configure()
+ getConfig()
+ onComponentInitialization()
+ getConnection()
+ getPoller()
+ getEventListener()
config_
cl_gcalcli::GcalcliConfig
+gcalcli_path
+agenda_days
+max_consecutive
_failures
+heartbeat_interval
+poll_interval
+calendars
+config_folder
string
int
seconds
vector< std::string >
optional< std::string >
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmacc2Component > >
#components_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
#orthogonal_
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ getClientBehavior()
+ getGlobalSMData()
+ setGlobalSMData()
+ getNode()
+ getLogger()
+ onInitialize()
# initializeClients()
# assignClientToOrthogonal()
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
#clients_
#client_behaviors_
mutex
#mutex_
SmaccStateMachine
#stateMachine_
map< smacc2::ISmaccComponent >
#components_
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
#orthogonals_
shared_ptr< smacc2
::introspection::SmaccState
MachineInfo >
#currentStateInfo_
SmaccStateInfo
#currentStateInfo_
shared_ptr< smacc2
::introspection::SmaccState
Info >
#currentState_
vector< smacc2::ISmaccState * >
#stateVector_
SharedPtr
#m_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentState()
+ publishTransition()
+ initialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ discconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnFullInitConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnFullInitConfiguration
Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getFuture()
+ getStateMachineConsistencyId()
# checkStateMachineConsistence()
# initializeROS()
# initialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEvent ToStateReactors()
- updateStatusMessage()
#state_machine_
#mutex_
#client_behaviors_
#orthogonals_
#stateMachineInternalAction_
#eventQueueMutex_
#m_mutex_
#currentStateInfo_
#currentState_
#status_msg_
#stateMachineInfo_
#recursive_mutex_
StateMachineInternalAction
#stateMachineCurrentAction_
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
#stateCallbackConnections_
map< std::string, std
::pair< std::function
< std::string()>, boost
::any > >
#globalData_
vector< smacc2::msgs
::msg::SmaccTransitionLogEntry >
#transitionLogHistory_
SMPlanNode
#planNode_
int64_t
#timer_
SharedPtr
#stateSeqCounter_
SharedPtr
#eventLogPub_
#stateMachineStatus
Pub
#transitionHistory
Service
#transitionLogPub_
map< smacc2::ClientComponentKey,
std::shared_ptr< smacc2
::ISmacc2Component > >
#components_
vector< smacc2::ISmaccUpdatable * > >
#updatableClients_
vector< std::vector
< smacc2::ISmaccUpdatable * > >
#updatableStateElements_
atomic< int64_t >
#state_
double
#loop_rate_hz
atomic< bool >
#initialized
-end
#processor_handle_
SmaccFifoScheduler *
#scheduler_
processor_handle
#processor_handle_
ExecutionModel
#executionModel_
thread
#signalDetectorThread_
map< std::string, std
::shared_ptr< smacc2
::ISmaccStateMachine > >
#smaccStateMachines_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateHandler()
+ postEvent()
+ pollingLoop()
+ getLogger()
+ getNode()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
- pollOnce()
#signalDetector_
#mutex_
#client_behaviors_
#state_machine_
#orthogonals_
#clients_
#currentState_
#stateMachineInternalAction_
#eventQueueMutex_
#stateMachineInfo_
#recursive_mutex_
#globalData_
#transitionLogHistory_
#stateCallbackConnections_
#stateSeqCounter_
#timer_
#eventLogPub_
#stateMachineStatus
Pub
#transitionHistory
Service
#transitionLogPub_
#stateMachineCurrentAction_
#stateMachineInternalAction_
#eventQueueMutex_
#stateMachineInfo_
#orthogonals_
#status_msg_
#stateInfo_
#currentStateInfo_
#currentState_
#m_
#stateVector_
#processor_handle_
#scheduler_
#initialized
-end
#loop_rate_hz
#state_
#updatableStateElements_
#updatableClients_
#executionModel_
#signalDetectorThread_
#smaccStateMachines_
#signalDetector_
#statusPub_