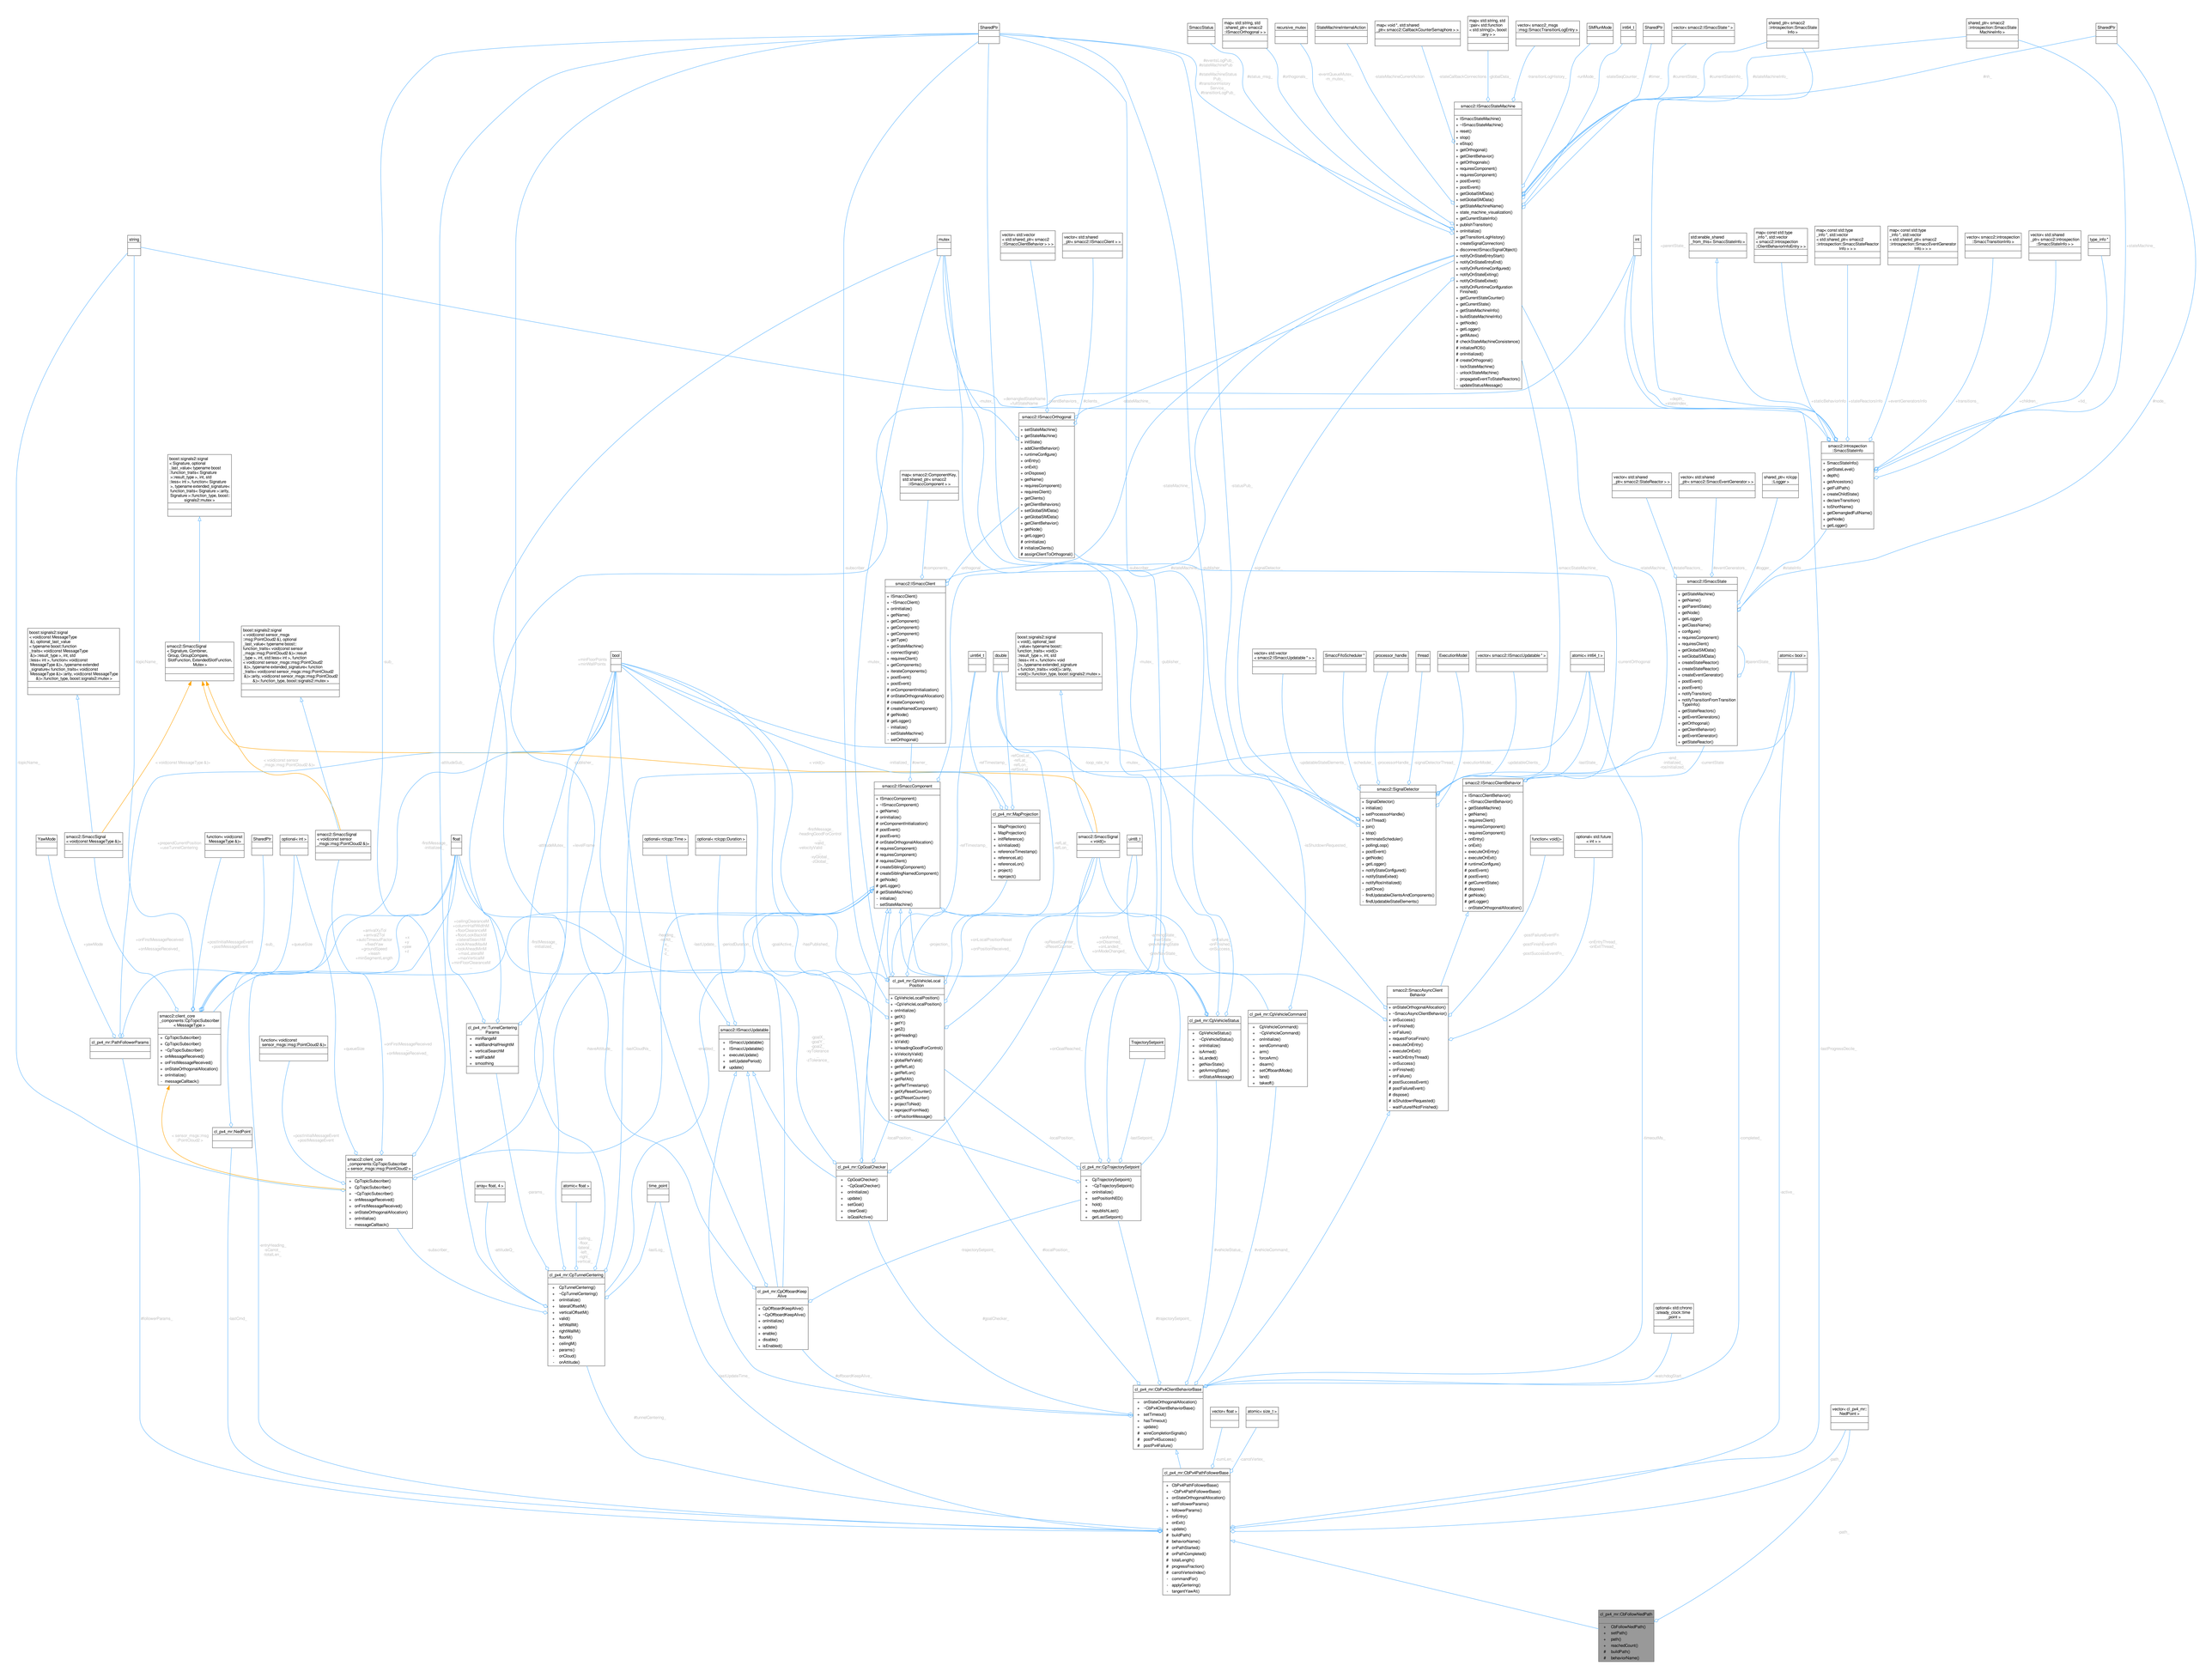
SharedPtr
SmaccStatus
map< std::string, std::shared_ptr< smacc2::ISmaccOrthogonal > >
recursive_mutex
StateMachineInternalAction
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std::pair< std::function< void()>, bool > >
vector< smacc2_msgs::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2::introspection::SmaccStateInfo >
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
SharedPtr
string
mutex
vector< std::vector< std::shared_ptr< smacc2::ISmaccClientBehavior > > >
vector< std::shared_ptr< smacc2::ISmaccClient > >
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonals()
+ getClientBehaviors()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ static_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialized()
+ getTransitionLogHistory()
+ createSignalConnections()
+ disconnectSmaccSignals()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStateMessage()
int
std::enable_shared_from_this< SmaccStateInfo >
map< const std::type_info *, std::vector< smacc2::introspection::ISmaccStateReactorInfo > >
map< const std::type_info *, std::shared_ptr< smacc2::introspection::SmaccStateReactorInfo > >
map< const std::type_info *, std::shared_ptr< smacc2::introspection::SmaccEventGeneratorInfo > >
vector< smacc2::introspection::ISmaccTransitionInfo >
vector< std::shared_ptr< smacc2::introspection::SmaccStateInfo > >
type_info *
smacc2::introspection::ISmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
- depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
vector< std::shared_ptr< smacc2::ISmaccStateReactor > >
vector< std::shared_ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp::Logger >
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponents()
+ requiresClients()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
map< smacc2::ComponentKey, std::shared_ptr< smacc2::ISmaccComponent > >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
boost::signals2::signal< void(), optional_last_value< typename boost::function_traits< void()>::result_type >, int, std::less< int >, function< void()>, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal< void(const sensor_msgs::msg::PointCloud2 &), optional_last_value< typename boost::function_traits< void(const sensor_msgs::msg::PointCloud2 &)>::result_type >, int, std::less< int >, function< void(const sensor_msgs::msg::PointCloud2 &)>, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal< void(const MessageType &), optional_last_value< typename boost::function_traits< void(const MessageType &)>::result_type >, int, std::less< int >, function< void(const MessageType &)>, SlotFunction, ExtendedSlotFunction, Mutex >
smacc2::SmaccSignal
+ Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
smacc2::SmaccSignal< void(const MessageType &)>
smacc2::client_core_components::CpTopicSubscriber< MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ oninitialize()
- messageCallback()
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ oninitialize()
- messageCallback()
cl_pw4_mr::PathFollowerParams
cl_pw4_mr::NavPoint
boot
uint64_t
double
boost::signals2::signal< void(), optional_last_value< typename boost::function_traits< void()>::result_type >, int, std::less< int >, function< void()>, SlotFunction, ExtendedSlotFunction, Mutex >
vector< std::vector< smacc2::ISmaccUpdatable * > >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
atomic< int64_t >
atomic< bool >
smacc2::SmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransitionTypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
+ oninitialize()
# onComponentInitialization()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSibling(Component)
# createSiblingNamed(Component)
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
- setOrthogonal()
cl_pw4_mr::MapProjection
+ MapProjection()
+ MapProjection()
+ initReference()
+ isInitialized()
+ referenceTimestamp()
+ referenceLat()
+ referenceLon()
+ project()
+ reproject()
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ execute(Update)
+ setUpdatePeriod()
# update()
smacc2::SmaccSignal< void()>
uint8_t
optional< rclcpp::Time >
optional< rclcpp::Duration >
float
YawMode
smacc2::SmaccSignal< void(const MessageType &)>
function< void(const MessageType &)>
SharedPtr
optional< int >
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
function< void(const sensor_msgs::msg::PointCloud2 &)>
array< float, 4 >
atomic< float >
time_point
cl_pw4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ oninitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
+ onCloud()
+ onAttitude()
cl_pw4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ oninitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
cl_pw4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ oninitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_pw4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ oninitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
cl_pw4_mr::CpVehicleLocal Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ oninitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ spinHeadingGoodForControl()
+ spinVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToFlat()
+ reprojectFromNed()
+ onPositionMessage()
cl_pw4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ oninitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
cl_pw4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ oninitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForcePreempt()
+ requestForceFinish()
+ executeOnExit()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
function< void()>
optional< std::future< void > >
cl_pw4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
vector< float >
atomic< size_t >
cl_pw4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# cannotVisWindow()
- commandFun()
- applyCentering()
- tangentYawAt()
cl_pw4_mr::CbFollowNedPath
+ CbFollowNedPath()
+ ~CbFollowNedPath()
+ setPath()
+ path()
+ reachedCount()
# buildPath()
# behaviorName()
vector< cl_pw4_mr::NedPoint >
optional< std::chrono::steady_clock::time_point >
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
cl_pw4_mr::NedPoint
cl_pw4_mr::PathFollowerParams
function< void(const sensor_msgs::msg::PointCloud2 &)>
smacc2::client_core_components::CpTopicSubscriber< MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ oninitialize()
- messageCallback()
cl_pw4_mr::CpTunnelCentering Params
+ minRangeM
+ wallBandHalfHeightM
+ verticalSearchM
+ wallFadeM
+ smoothing
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ oninitialize()
- messageCallback()
cl_pw4_mr::CpOffboardKeep Alive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ oninitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
cl_pw4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ oninitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_pw4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ oninitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
TrajectorySetpoint
cl_pw4_mr::CpVehicleLocal Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ oninitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ spinHeadingGoodForControl()
+ spinVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToFlat()
+ reprojectFromNed()
+ onPositionMessage()
cl_pw4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ oninitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
cl_pw4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ oninitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForcePreempt()
+ requestForceFinish()
+ executeOnExit()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
function< void()>
optional< std::future< void > >
cl_pw4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
vector< float >
atomic< size_t >
cl_pw4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# cannotVisWindow()
- commandFun()
- applyCentering()
- tangentYawAt()
cl_pw4_mr::CbFollowNedPath
+ CbFollowNedPath()
+ ~CbFollowNedPath()
+ setPath()
+ path()
+ reachedCount()
# buildPath()
# behaviorName()
vector< cl_pw4_mr::NedPoint >
optional< std::chrono::steady_clock::time_point >
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
cl_pw4_mr::NedPoint
cl_pw4_mr::PathFollowerParams
function< void(const sensor_msgs::msg::PointCloud2 &)>
smacc2::client_core_components::CpTopicSubscriber< MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ oninitialize()
- messageCallback()
cl_pw4_mr::CpTunnelCentering Params
+ minRangeM
+ wallBandHalfHeightM
+ verticalSearchM
+ wallFadeM
+ smoothing
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ oninitialize()
- messageCallback()
cl_pw4_mr::CpOffboardKeep Alive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ oninitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
cl_pw4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ oninitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
+ onCloud()
+ onAttitude()
cl_pw4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ oninitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_pw4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ oninitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
TrajectorySetpoint
cl_pw4_mr::CpVehicleLocal Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ oninitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ spinHeadingGoodForControl()
+ spinVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToFlat()
+ reprojectFromNed()
+ onPositionMessage()
cl_pw4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ oninitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
cl_pw4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ oninitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForcePreempt()
+ requestForceFinish()
+ executeOnExit()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
function< void()>
optional< std::future< void > >
cl_pw4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
vector< float >
atomic< size_t >
cl_pw4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# cannotVisWindow()
- commandFun()
- applyCentering()
- tangentYawAt()
cl_pw4_mr::CbFollowNedPath
+ CbFollowNedPath()
+ ~CbFollowNedPath()
+ setPath()
+ path()
+ reachedCount()
# buildPath()
# behaviorName()
vector< cl_pw4_mr::NedPoint >
optional< std::chrono::steady_clock::time_point >