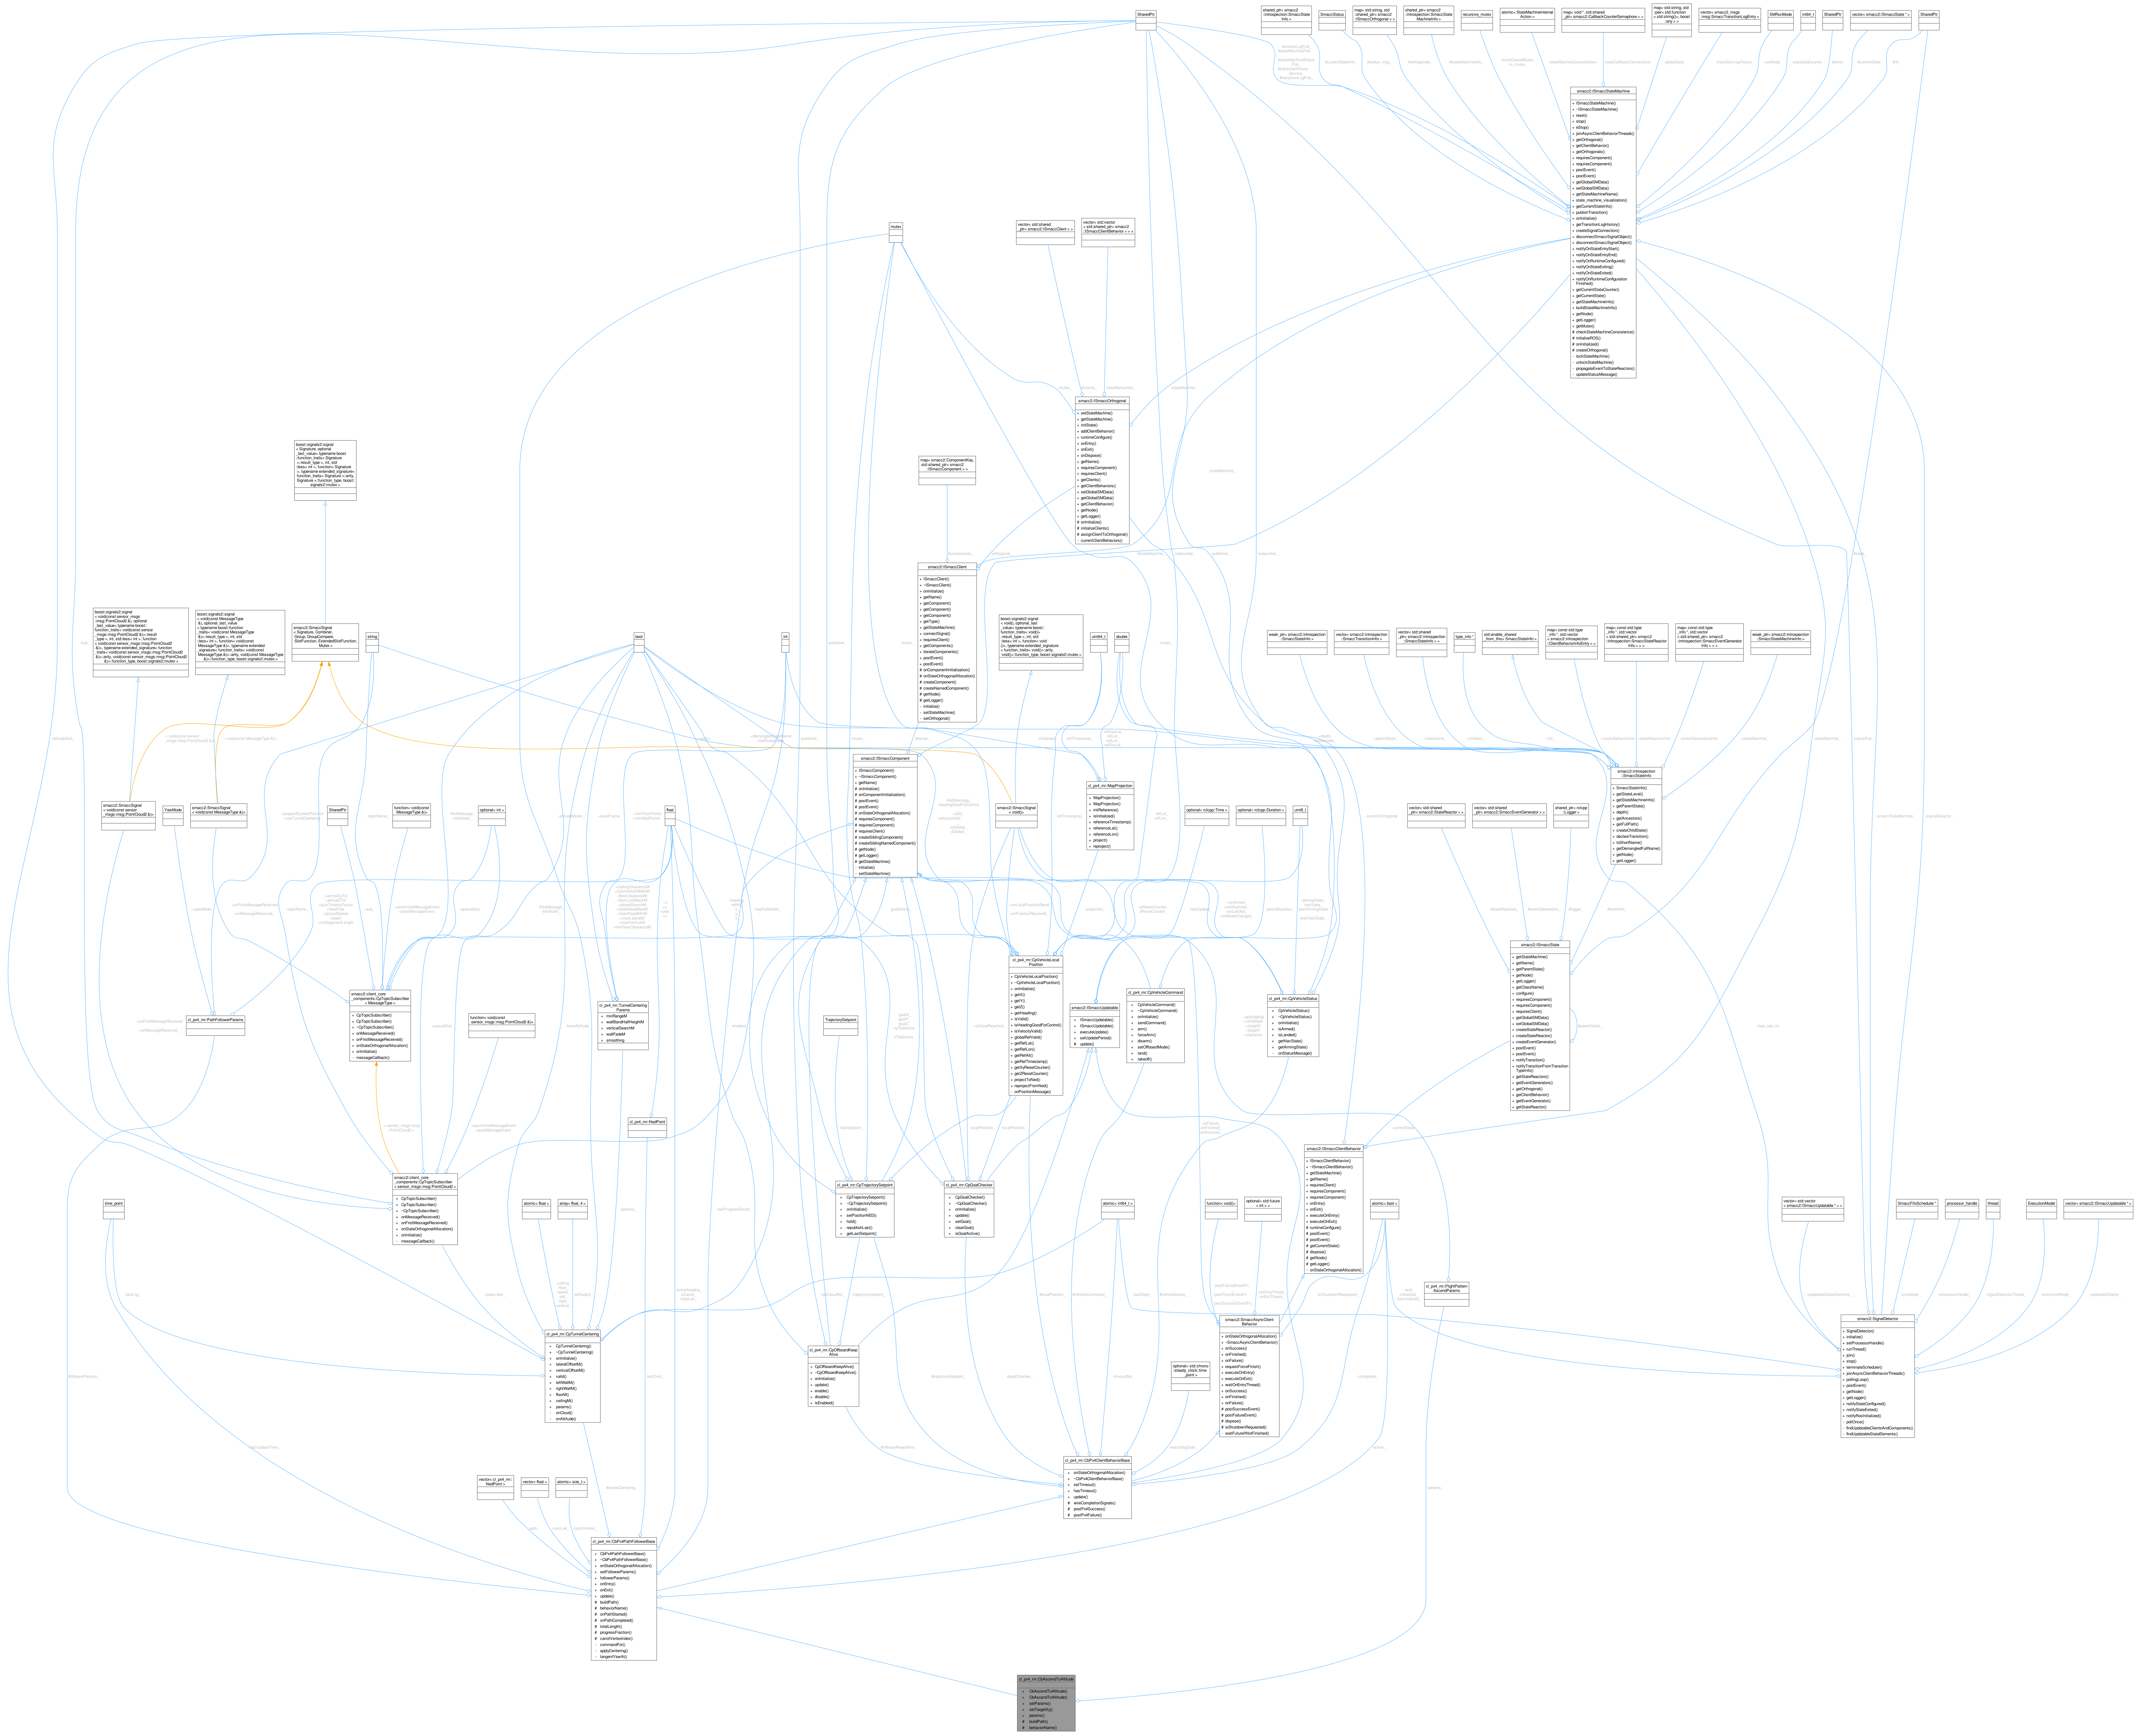
cl_px4_mr::CbAscendToAltitude
+ CbAscendToAltitude()
+ CbAscendToAltitude()
+ setParams()
+ setTargetXy()
+ params()
# buildPath()
# behaviorName()
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
#tunnelCentering_
-cumLen_
-carrotVertex_
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
-timeoutMs_
-watchdogStart_
optional< std::chrono::steady_clock::time_point >
smacc2::SmaccAsyncClientBehavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
function< void()>
optional< std::future< int > >
-postFailureEventFn_
-postFinishEventFn_
-postSuccessEventFn_
-onEntryThread_
-onExitThread_
-isShutdownRequested_
-onFailure_
-onFinished_
-onSuccess_
atomic< bool >
-completed_
-active_
-end_
-initialized_
-rosInitialized_
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
-currentState_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
-updatableStateElements_
-scheduler_
-processorHandle_
cl_px4_mr::CpVehicleLocalPosition
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
+onLocalPositionReset_
+onPositionReceived_
-projection_
-xyResetCounter_
-zResetCounter_
-lastUpdate_
+onGoalReached_
-localPosition_
-localPosition_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
cl_px4_mr::CpGoalChecker
cl_px4_mr::CpVehicleStatus
- onStatusMessage()
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
-goalActive_
-firstMessage_
-headingGoodForControl_
-valid_
-velocityValid_
-xyGlobal_
-zGlobal_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
#components_
-orthogonal_
#owner_
-publisher_
-mutex_
smacc2::SmaccSignal< void()>
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfigurationFinished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
shared_ptr< smacc2::introspection::SmaccStateInfo >
SmaccStatus
map< std::string, std::shared_ptr< smacc2::ISmaccOrthogonal > >
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
recursive_mutex
atomic< StateMachineInternalAction >
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std::pair< std::function< std::string()>, boost::any > >
vector< smacc2_msgs::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
vector< smacc2::ISmaccState * >
SharedPtr
#eventsLogPub_
#stateMachinePub_
#stateMachineStatusPub_
#transitionHistoryService_
#transitionLogPub_
#currentStateInfo_
#status_msg_
#orthogonals_
#stateMachineInfo_
-eventQueueMutex_
-m_mutex_
-stateMachineCurrentAction
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-runMode_
-stateSeqCounter_
#timer_
#currentState_
#nh_
weak_ptr< smacc2::introspection::SmaccStateInfo >
vector< smacc2::introspection::SmaccTransitionInfo >
vector< std::shared_ptr< smacc2::introspection::SmaccStateInfo > >
type_info *
std::enable_shared_from_this< SmaccStateInfo >
map< const std::type_info *, std::vector< smacc2::introspection::ClientBehaviorInfoEntry > >
map< const std::type_info *, std::vector< std::shared_ptr< smacc2::introspection::SmaccStateReactorInfo > > >
map< const std::type_info *, std::vector< std::shared_ptr< smacc2::introspection::SmaccEventGeneratorInfo > > >
weak_ptr< smacc2::introspection::SmaccStateMachineInfo >
-subscriber_
+depth_
+stateIndex_
+parentState_
+transitions_
+children_
+tid_
+staticBehaviorInfo
+stateReactorsInfo
+eventGeneratorsInfo
+stateMachine_
-stateMachine_
smacc2::introspection::SmaccStateInfo
smacc2::ISmaccState
smacc2::ISmaccOrthogonal
boost::signals2::signal< void(const sensor_msgs::msg::PointCloud2 &), optional_last_value< typename boost::function_traits< void(const sensor_msgs::msg::PointCloud2 &)>::result_type >, int, std::less< int >, function< void(const sensor_msgs::msg::PointCloud2 &)>, typename extended_signature< function_traits< void(const sensor_msgs::msg::PointCloud2 &)>::arity, void(const sensor_msgs::msg::PointCloud2 &)>::function_type, boost::signals2::mutex >
boost::signals2::signal< void(const MessageType &), optional_last_value< typename boost::function_traits< void(const MessageType &)>::result_type >, int, std::less< int >, function< void(const MessageType &)>, typename extended_signature< function_traits< void(const MessageType &)>::arity, void(const MessageType &)>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
string
-sub_
-attitudeSub_
< void(const sensor_msgs::msg::PointCloud2 &)>
< void(const MessageType &)>
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
YawMode
smacc2::SmaccSignal< void(const MessageType &)>
+prependCurrentPosition
+useTunnelCentering
SharedPtr
-topicName_
function< void(const MessageType &)>
-firstMessage_
-initialized_
optional< int >
+yawMode
+onFirstMessageReceived_
+onMessageReceived_
-topicName_
+arrivalXyTol
+arrivalZTol
+autoTimeoutFactor
+fixedYaw
+groundSpeed
+leash
+minSegmentLength
-sub_
+postInitialMessageEvent
+postMessageEvent
+queueSize
smacc2::client_core_components::CpTopicSubscriber< MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
function< void(const sensor_msgs::msg::PointCloud2 &)>
-haveAttitude_
cl_px4_mr::TunnelCenteringParams
+ minRangeM
+ wallBandHalfHeightM
+ verticalSearchM
+ wallFadeM
+ smoothing
+floorLookBackM
+lateralSearchM
+lookAheadMaxM
+lookAheadMinM
+maxLateralM
+maxVerticalM
+minFloorClearanceM
...
+x
+y
+yaw
+z
cl_px4_mr::NedPoint
< sensor_msgs::msg::PointCloud2 >
+postInitialMessageEvent
+postMessageEvent
+queueSize
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
atomic< float >
array< float, 4 >
-ceiling_
-floor_
-lateral_
-left_
-right_
-vertical_
-attitudeQ_
-subscriber_
-params_
-entryHeading_
-sCarrot_
-totalLen_
-lastCmd_
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
cl_px4_mr::CpPathFollowerParams
cl_px4_mr::CpMapProjection
cl_px4_mr::CpTrajectorySetpoint
cl_px4_mr::CpOffboardKeepAlive
cl_px4_mr::FlightPatternAscendParams
TrajectorySetpoint
mutex
bool
int
uint8_t
double
float
time_point