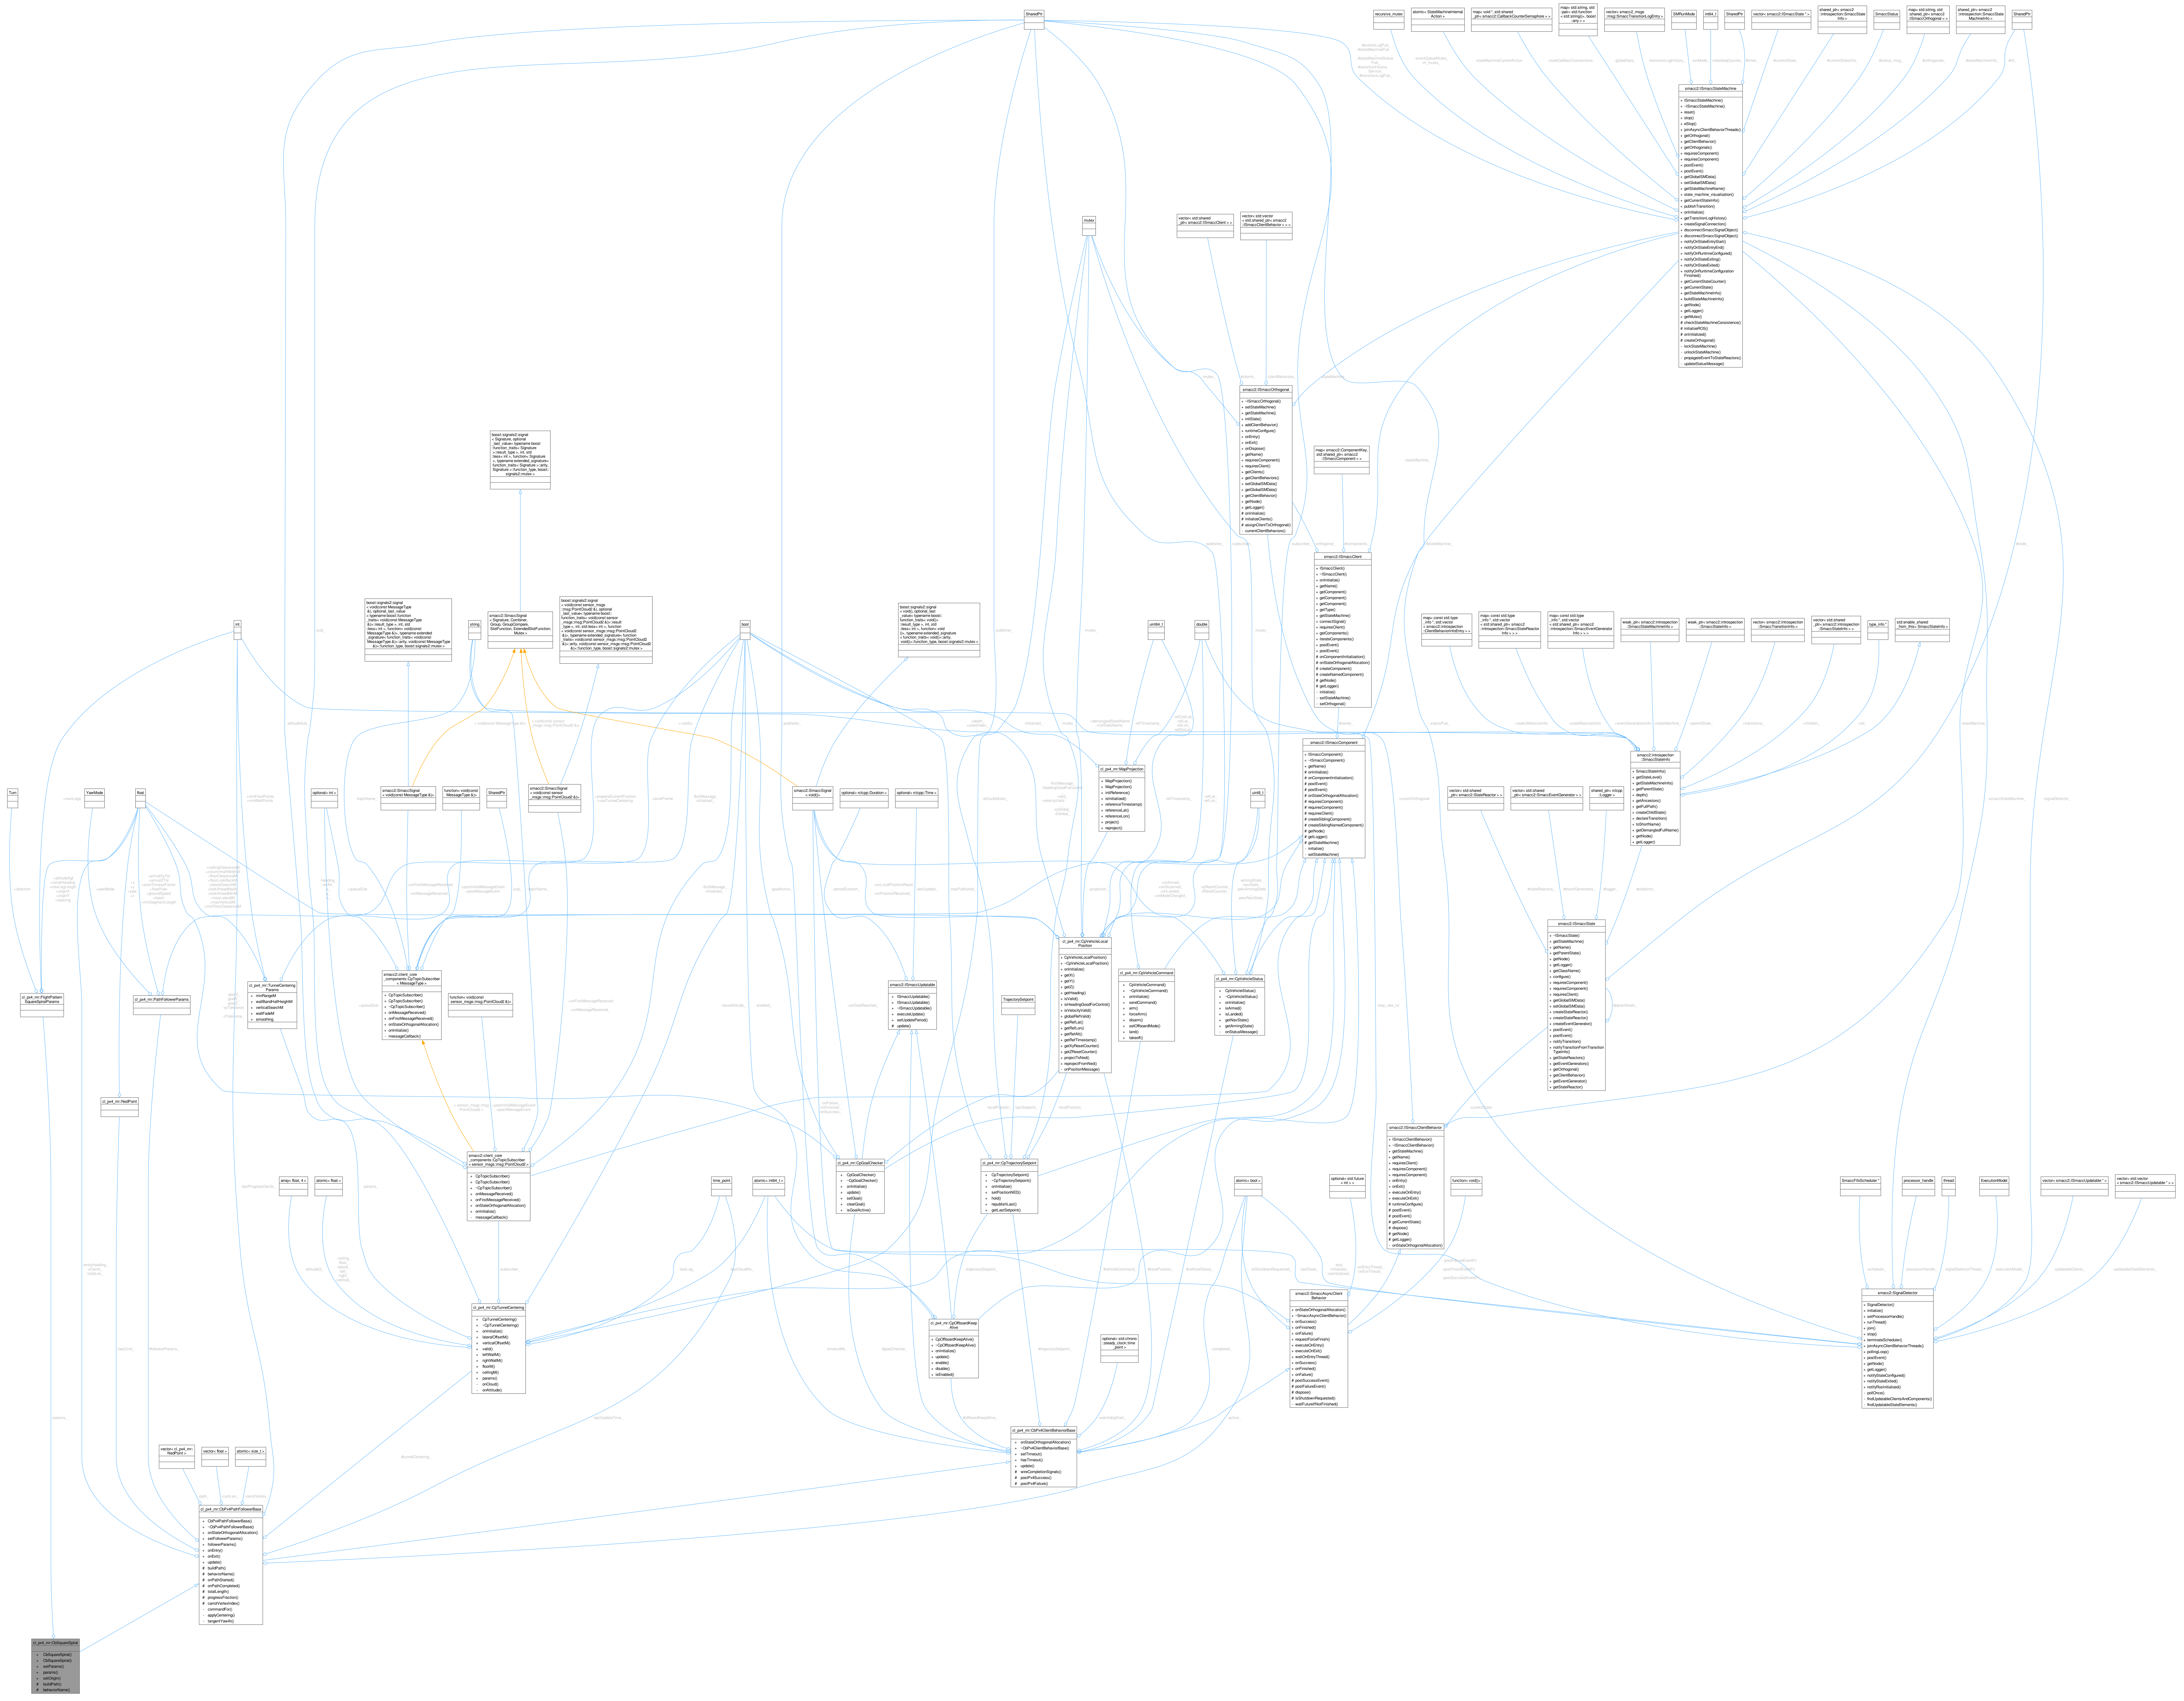
cl_px4_mr::CbSquareSpiral
+ CbSquareSpiral()
+ CbSquareSpiral()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()
-params_
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
cl_px4_mr::FlightPattern SquareSpiralParams
cl_px4_mr::PathFollowerParams
cl_px4_mr::NedPoint
cl_px4_mr::TunnelCentering Params
Turn
YawMode
float
int
string
bool
double
uint8_t
SharedPtr
mutex
cl_px4_mr::MapProjection
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
< sensor_msgs::msg::PointCloud2 >
+postInitialMessageEvent
+postMessageEvent
-subscriber_
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
time_point
atomic< int64_t >
-lastLog_
-lastCloudNs_
-lastUpdateTime_
TrajectorySetpoint
cl_px4_mr::CpVehicleLocal Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
-projection_
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
+onArmed_
+onDisarmed_
+onLanded_
+onModeChanged_
-xyResetCounter_
-zResetCounter_
-armingState_
-navState_
-prevArmingState_
-prevNavState_
cl_px4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
-onFailure_
-onFinished_
-onSuccess_
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
-localPosition_
-lastSetpoint_
-trajectorySetpoint_
cl_px4_mr::CpOffboardKeep Alive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
optional< std::chrono::steady_clock::time_point >
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
-timeoutMs_
#goalChecker_
#offboardKeepAlive_
#trajectorySetpoint_
#vehicleCommand_
-watchdogStart_
smacc2::ISmaccUpdatable
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
#owner_
-statusPub_
-currentOrthogonal
-loop_rate_hz
smacc2::ISmaccClient
smacc2::ISmaccOrthogonal
smacc2::ISmaccStateMachine
smacc2::introspection::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getNode()
+ getLogger()
+staticBehaviorInfo
+stateReactorsInfo
+eventGeneratorsInfo
vector< std::shared_ptr< smacc2::StateReactor > >
vector< std::shared_ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp::Logger >
#stateReactors_
#eventGenerators_
#logger_
#stateInfo_
smacc2::ISmaccState
+ ~ISmaccState()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#parentState_
-currentState
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
atomic< bool >
optional< std::future< int > >
function< void()>
smacc2::SmaccAsyncClient Behavior
smacc2::SignalDetector