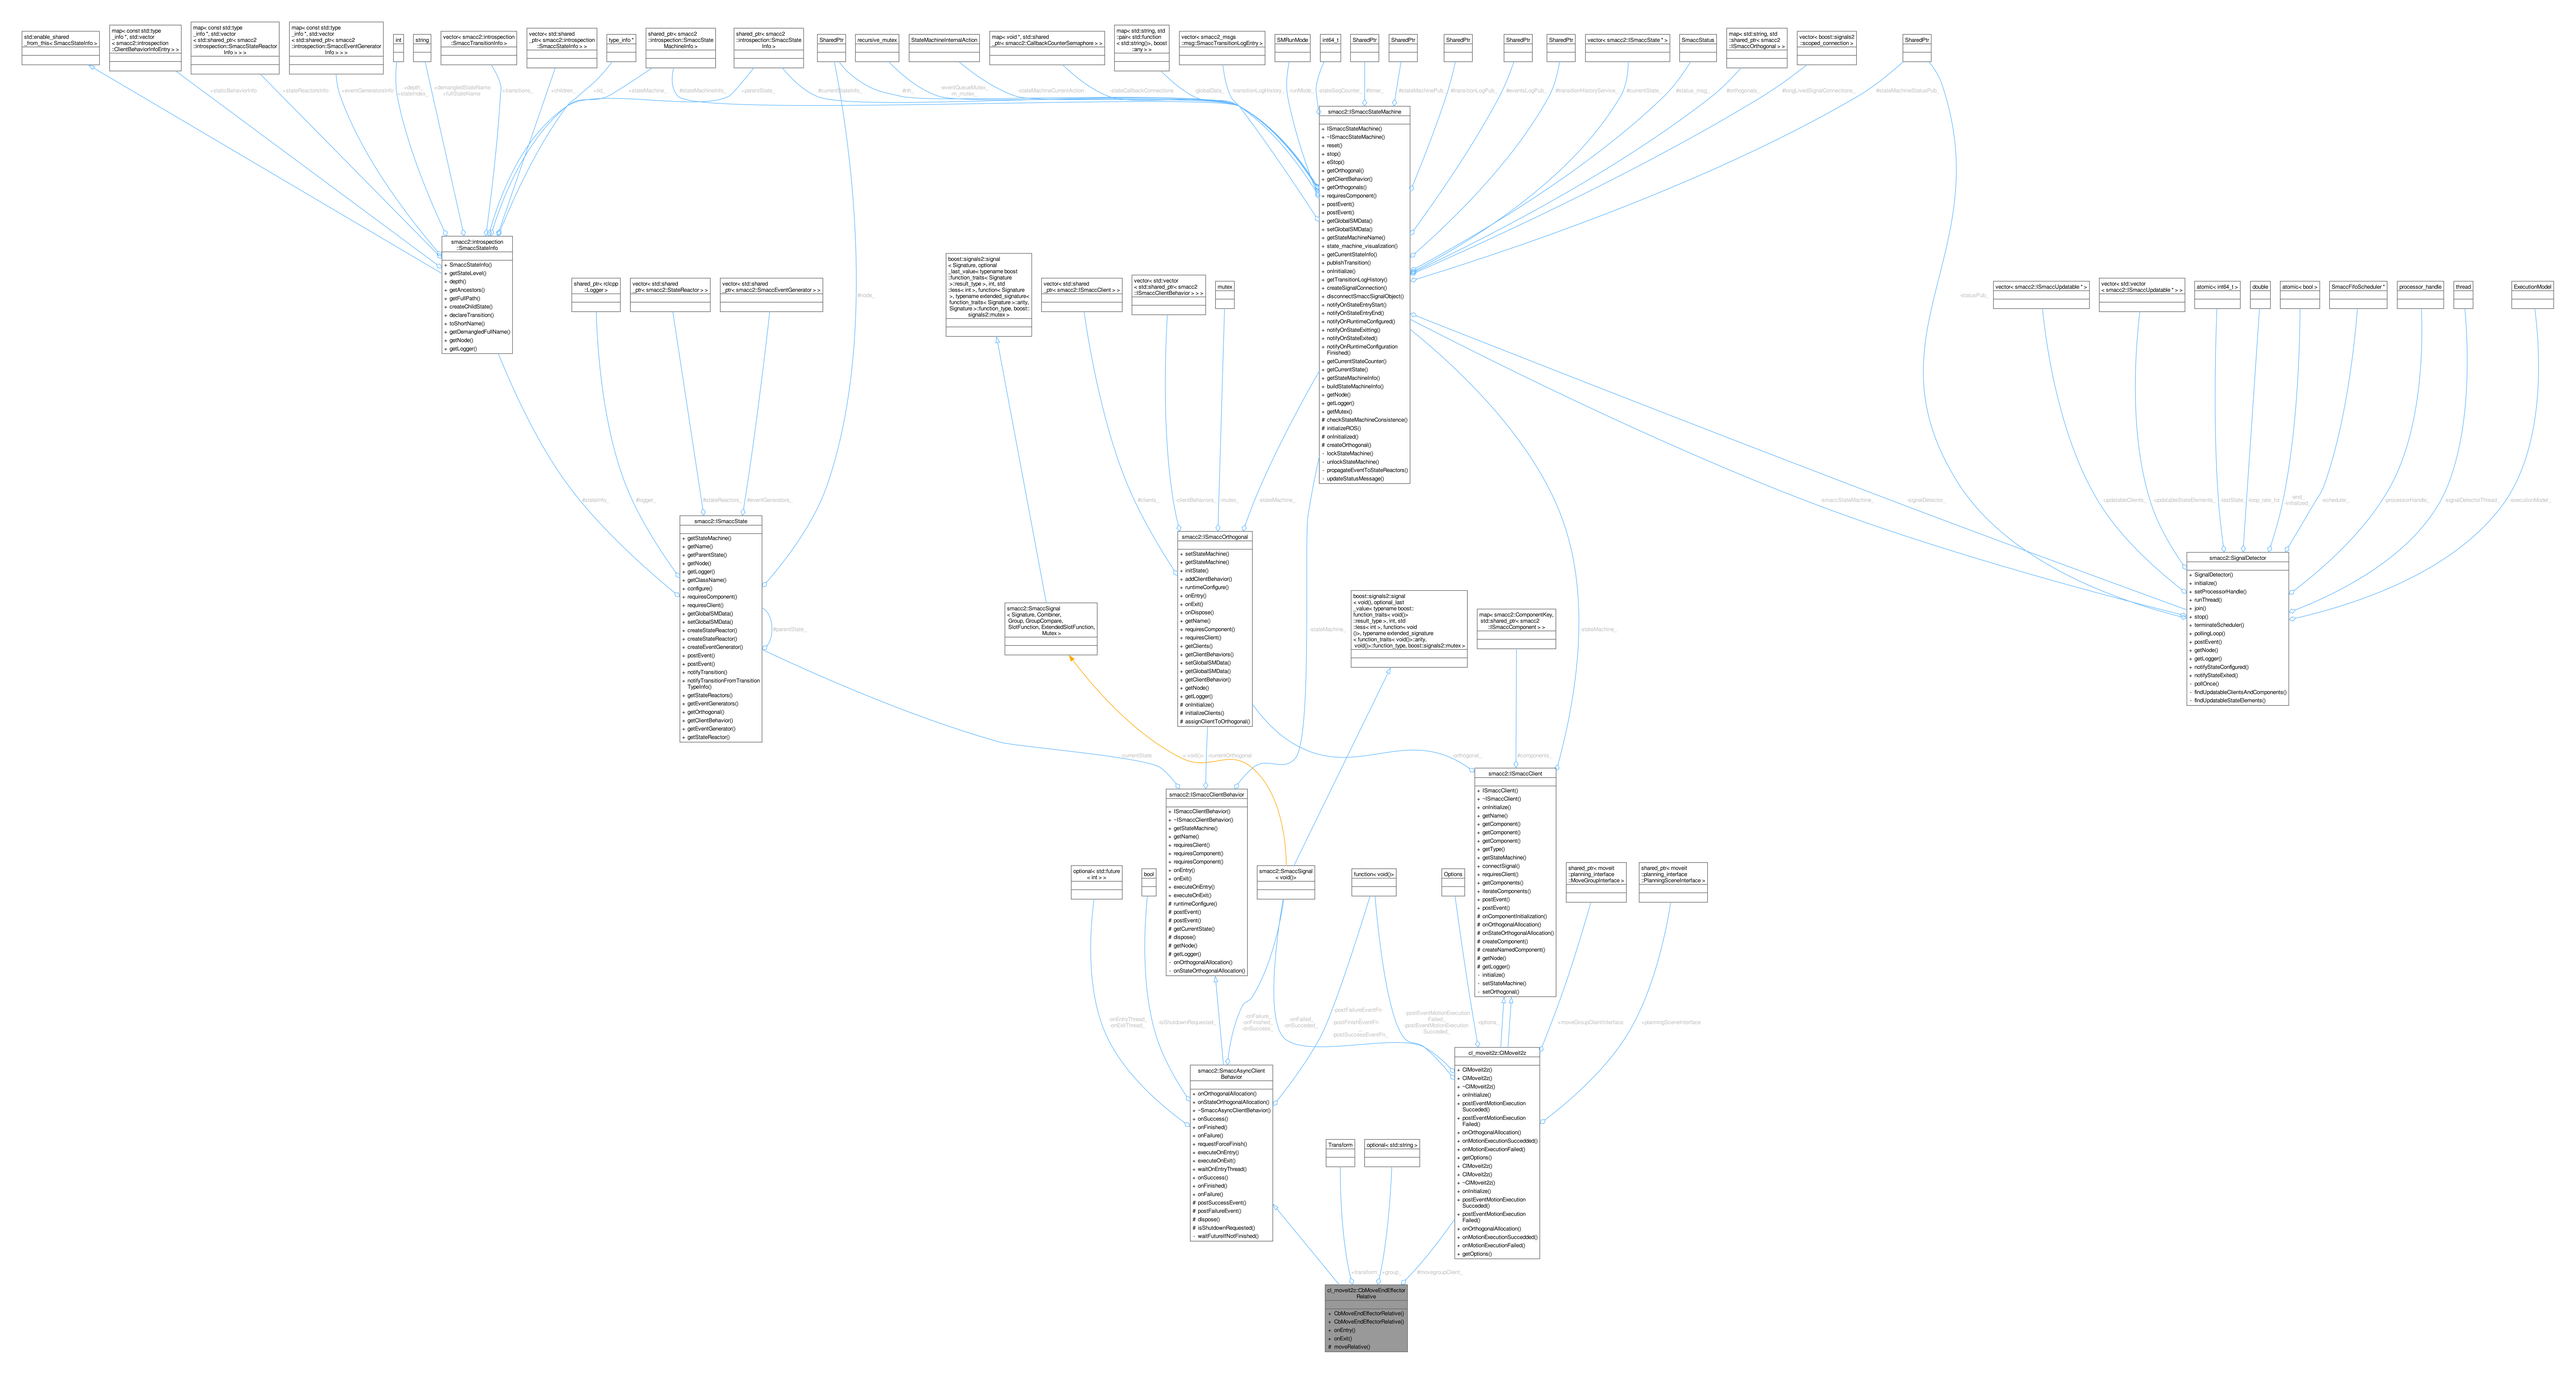

std::enable_shared
_from_this< SmaccStateInfo >
map< const std::type
_info *, std::vector
< smacc2::introspection
::ClientBehaviorInfoEntry > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccStateReactor
Info > > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccEventGenerator
Info > > >
int
string
vector< smacc2::introspection
::SmaccTransitionInfo >
vector< std::shared
_ptr< smacc2::introspection
::SmaccStateInfo > >
type_info *
shared_ptr< smacc2
::introspection::SmaccState
MachineInfo >
shared_ptr< smacc2
::introspection::SmaccState
Info >
SharedPtr
recursive_mutex
StateMachineInternalAction
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std
::pair< std::function
< std::string()>, boost
::any > >
vector< smacc2::msgs
::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
SharedPtr
SharedPtr
SharedPtr
SharedPtr
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
vector< boost::signals2
::scoped_connection >
SharedPtr
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration
Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
checkStateMachineConsistence()
initializeROS()
onInitialized()
createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection
::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
shared_ptr< rclcpp
::Logger >
vector< std::shared
_ptr< smacc2::IStateReactor > >
vector< std::shared
_ptr< smacc2::SmaccEventGenerator > >
boost::signals2::signal
< Signature, optional
_last_value< typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>, typename extended_signature<
function_traits< Signature >::arity,
Signature >::function_type, boost::
signals2::mutex >
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
mutex
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition
TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
orInitialize()
initializeClients()
assignClientToOrthogonal()
smacc2::SmaccSignal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(), optional_last
_value< typename boost::
function_traits< void()>
::result_type >, int, std
::less< int >, function< void
()>, typename extended_signature
< function_traits< void()>::arity,
void()>::function_type, boost::signals2::mutex >
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
onComponentInitialization()
onOrthogonalAllocation()
onStateOrthogonalAllocation()
createComponent()
createNamedComponents()
getNode()
getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponents()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
runtimeConfigure()
postEvent()
postEvent()
getCurrentState()
dispose()
getNode()
getLogger()
- onOrthogonalAllocation()
- onStateOrthogonalAllocation()
optional< std::future
< int > >
bool
smacc2::SmaccSignal
< void()>
function< void()>
Options
shared_ptr< moveit
::planning_interface
::MoveGroupInterface >
shared_ptr< moveit
::planning_interface
::PlanningSceneInterface >
smacc2::SmaccAsyncClient
Behavior
+ onOrthogonalAllocation()
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
postSuccessEvent()
postFailureEvent()
dispose()
isShutdownRequested()
- waitFutureIsNotFinished()
cl_moveit2z::ClMoveit2z
+ ClMoveit2z()
+ ClMoveit2z()
+ ~ClMoveit2z()
+ onInitialize()
+ postEventMotionExecution
Succeded()
+ postEventMotionExecution
Failed()
+ onOrthogonalAllocation()
+ onMotionExecutionSucceded()
+ onMotionExecutionFailed()
+ getOptions()
+ ClMoveit2z()
+ ClMoveit2z()
+ ~ClMoveit2z()
+ onInitialize()
+ postEventMotionExecution
Succeded()
+ postEventMotionExecution
Failed()
+ onOrthogonalAllocation()
+ onMotionExecutionSucceded()
+ onMotionExecutionFailed()
+ getOptions()
Transform
optional< std::string >
cl_moveit2z::ClMoveEndEffector
Relative
+ ClMoveEndEffectorRelative()
+ ClMoveEndEffectorRelative()
+ onEntry()
+ onExit()
moveRelative()
vector< smacc2::ISmaccUpdatable * >
vector< std::vector
< smacc2::ISmaccUpdatable * > >
atomic< int64_t >
double
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutorModel
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
#stateMachine_
#clients_
#clientBehaviors_
#mutex_
#stateMachine_
#stateMachine_
#orthogonals_
#components_
#currentState_
#currentOrthogonal_
#stateMachine_
#stateMachine_
#signalDetector_
#statusPub_
#updatableClients_
#updatableStateElements_
#lastState_
#loop_rate_ht
#end_
#initialized_
#scheduler_
#processorHandle_
#signalDetectorThread_
#executionModel_
#stateInfo_
#logger_
#stateReactors_
#eventGenerators_
#node_
#currentStateInfo_
#int_
#eventQueueMutex_
#n_mutex_
#stateMachineCurrentAction
#stateCallbackConnections
#globalData_
#transitionLogHistory_
#runMode_
#stateSeqCounter_
#timer_
#stateMachinePub_
#transitionLogPub_
#eventsLogPub_
#transitionHistoryService_
#currentState_
#status_msg_
#orthogonals_
#wrongLevelSignalConnections_
#stateMachineStatusPub_
#moveGroupClientInterface
#planningSceneInterface
#options_
#transform_
#group_
#movegroupClient_
-onEntryThread_
-onExitThread_
-isShutdownRequested_
-onFailure_
-onFinished_
-onSuccess_
-onFailed_
-onSucceded_
-postFailureEventFn
-postFinishEventFn
-postSuccessEventFn
-postEventMotionExecution
Failed_
-postEventMotionExecution
Succeded_
depth_
-stateIndex_
-demangledStateName
-fullStateName
-transitions_
-children_
-isr_
-stateMachine_
-stateMachineInfo_
-parentState_