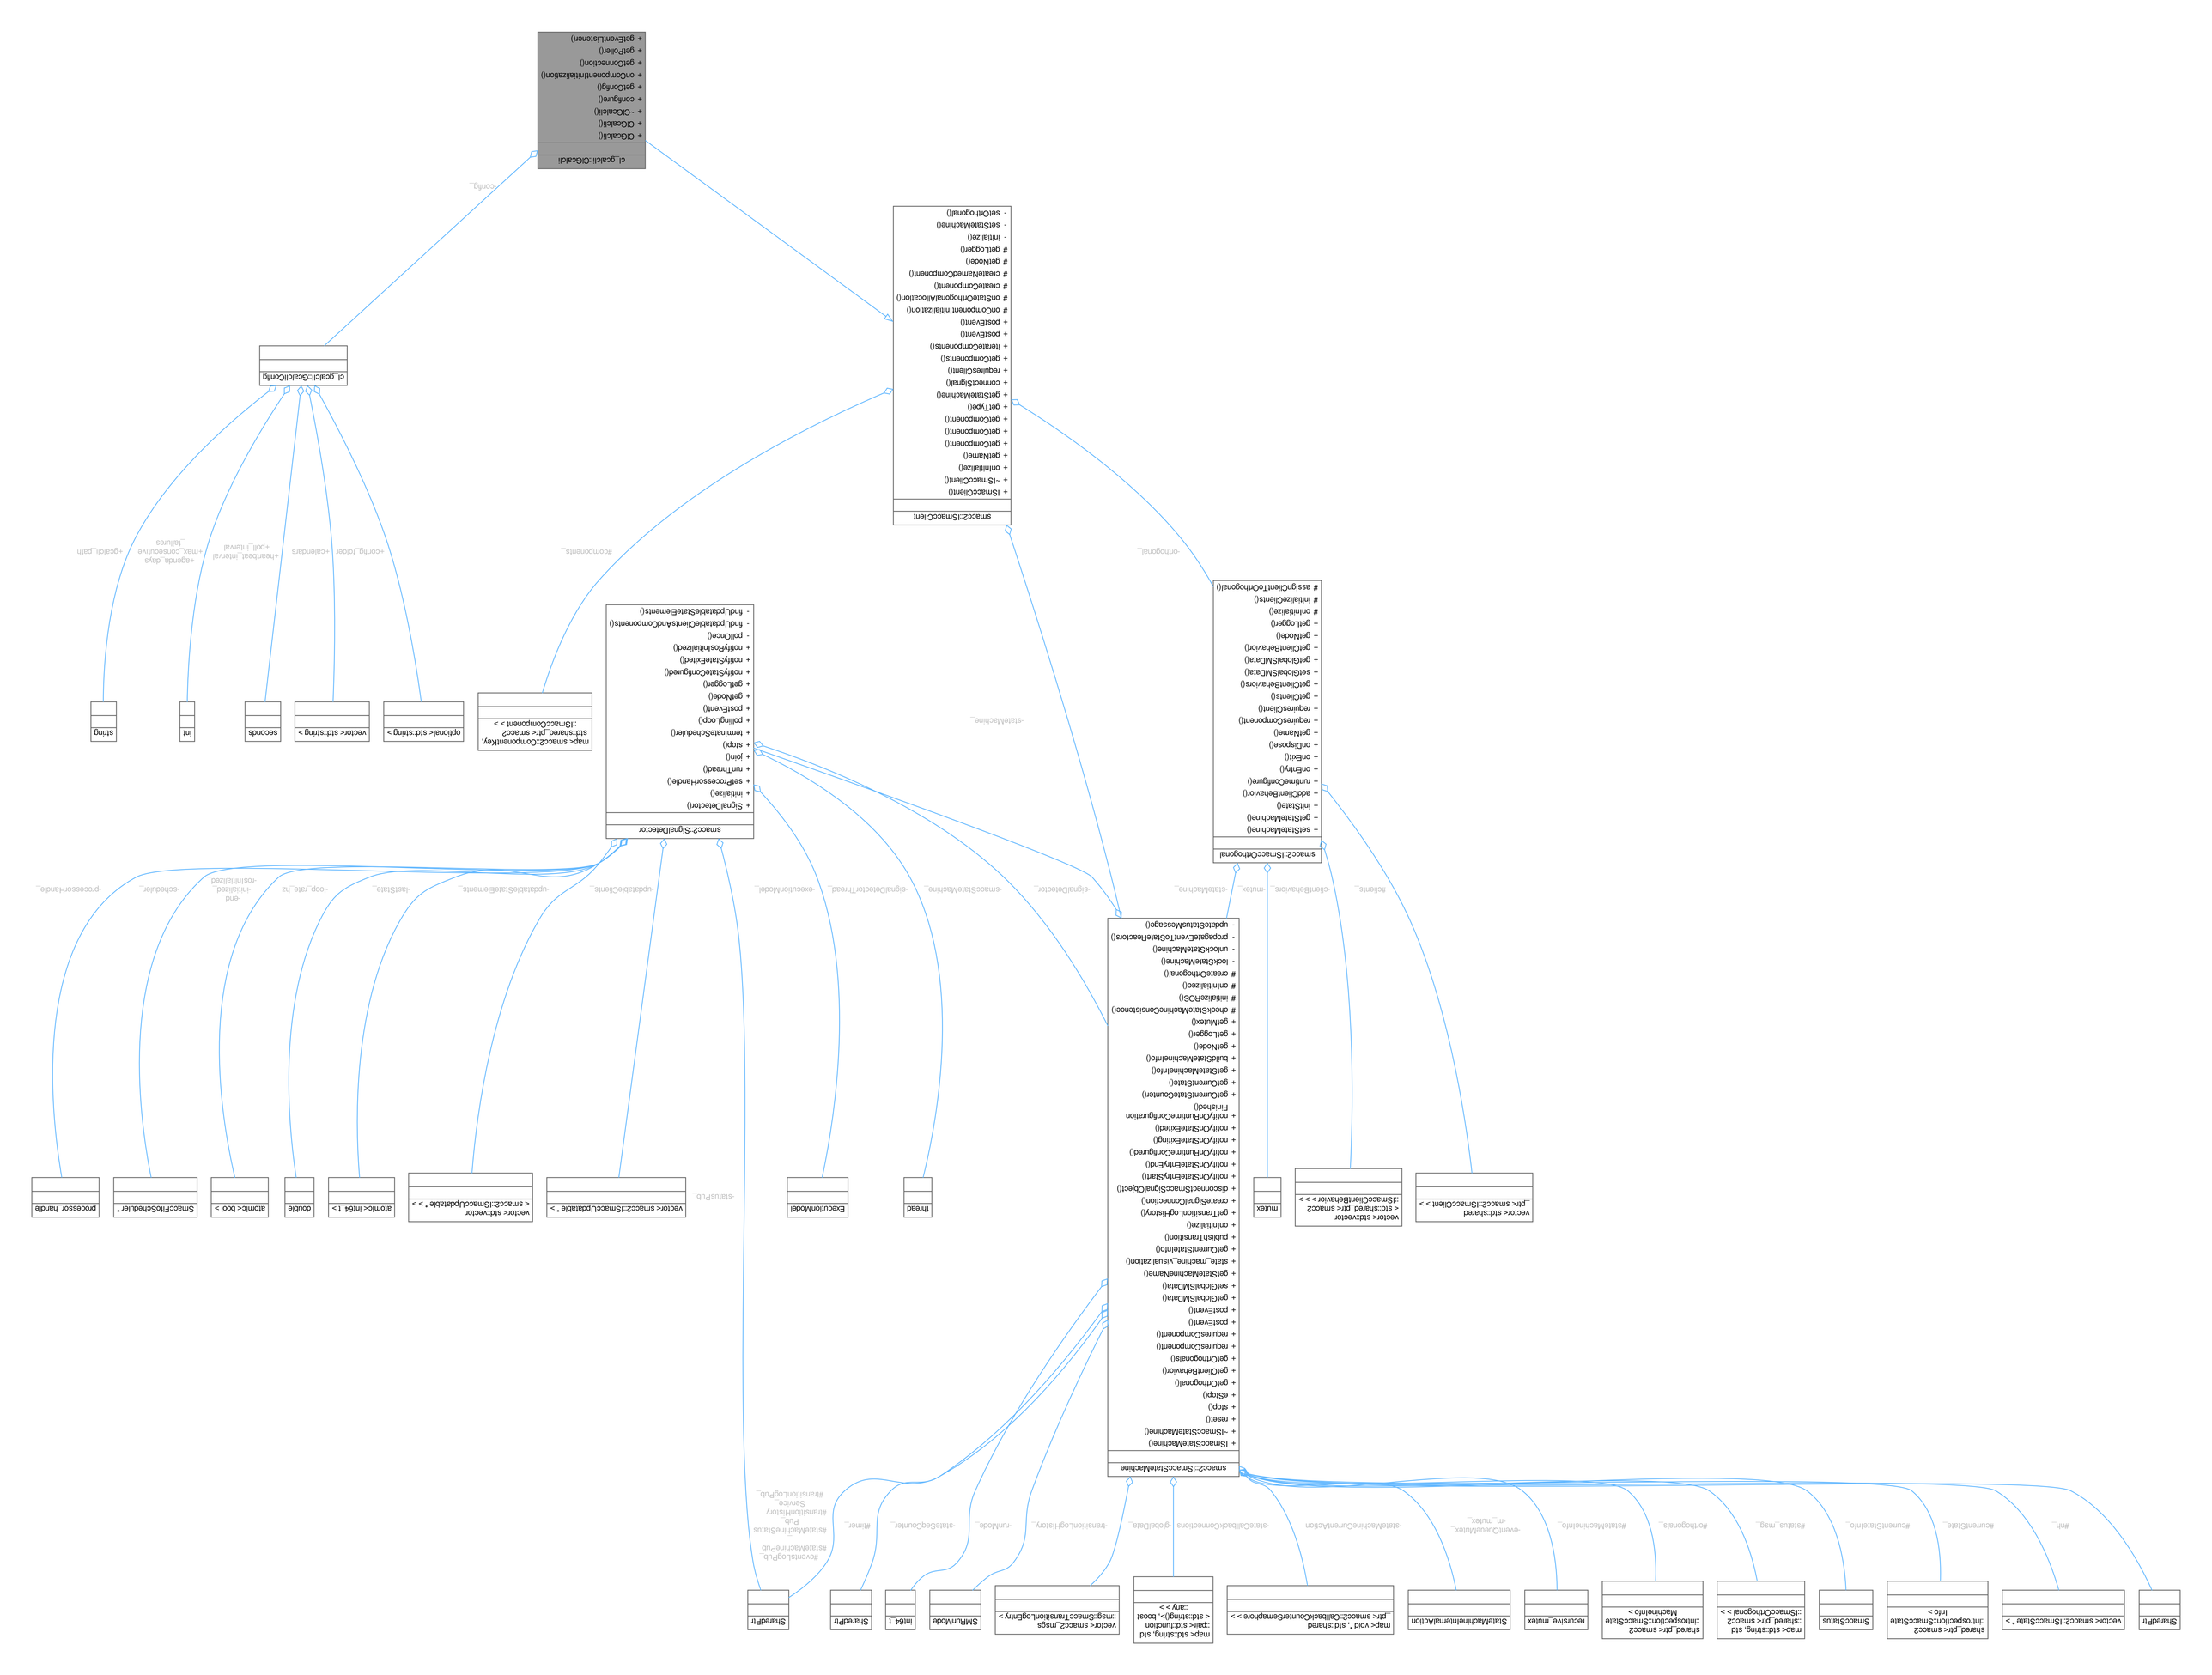
cl_gazal::CGazalCl
+ CGazalCl()
+ CGazalCl()
+ ~CGazalCl()
+ configure()
+ getConfig()
+ onComponentInitialization()
+ getConnection()
+ getFiber()
+ getEventListener()
config_
cl_gazal::GazalClConfig
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ requiresClient()
+ connectSignal()
+ iterateComponents()
+ postEvent()
+ postEvent()
+ onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
clientBehaviors_
mutex_
stateMachine_
orthogonal_
components_
config_folder
calendars
heartbeat_interval
poll_interval
agenda_days
max_consecutive_failures
gazal_path
string
int
seconds
vector< std::string >
optional< std::string >
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateSchedular()
+ postEvent()
+ pollAgent()
+ getNode()
+ getLogger()
+ notifyStateExited()
+ notifyStateEntered()
+ notifyStateConfigured()
+ notifyStateInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
signalDetector_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentState()
+ publishTransition()
+ initialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnFullInitConfigured()
+ notifyOnStateExiting()
+ notifyOnFullInitConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getFuture()
# checkStateMachineConsistence()
# initializeROS()
# initialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
stateMachine_
mutex_
clientBehaviors_
orthogonals_
states_
vector< std::shared_ptr< smacc2 ::ISmaccClientBehavior > >
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
mutex
vector< std::shared _ptr< smacc2::ISmaccClient > >
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ numImegConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requireComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ getGlobalSMData()
+ setGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
+ initialize()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
addClientBehavior()
numImegConfigure()
onEntry()
onExit()
onDispose()
getName()
requireComponent()
requiresClient()
getClients()
getClientBehaviors()
getGlobalSMData()
setGlobalSMData()
getClientBehavior()
getNode()
getLogger()
initialize()
assignClientToOrthogonal()
vector< std::shared_ptr< smacc2::ISmaccState > >
shared_ptr< smacc2 ::introspection::SmaccStateInfo >
SmaccState
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
shared_ptr< smacc2 ::introspection::SmaccStateMachineInfo >
recursive_mutex
StateMachineInternalAction
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
vector< smacc2_msgs ::msg::SmaccTransitionLogEntry >
map< std::string, std ::pair< std::function < std::any > > >
SMPumlNode
int64_t
SharedPtr
SharedPtr
SharedPtr
#eventLogPub_
#stateMachinePub
#stateMachineStatus
Pub
#transitionHistory
Service_
#transitionLogPub_
#timer_
stateSeqCounter_
numNode_
transitionLogHistory_
stateCallbackConnections
globalData_
stateMachineCurrentAction
eventQueueMutex
m_mutex_
#stateMachineInfo_
#orthogonals_
#status_msg_
#currentStateInfo_
#currentState_
#m_
processor_handle_
SmaccFiberSchedular *
atomic< bool >
double
atomic< int64_t >
vector< std::vector < smacc2::ISmaccUpdatable * > >
vector< smacc2::ISmaccUpdatable * >
ExecutionModel
thread
stateMachine_
processor_handle_
schedular_
initialized
-end-
loop_rate_hz
stateSeqCounter_
updatableStateElements_
updatableClients_
executionModel_
signalDetectorThread_
smaccStateMachine_
signalDetector_
clientBehaviors_
mutex_
stateMachine_
states_