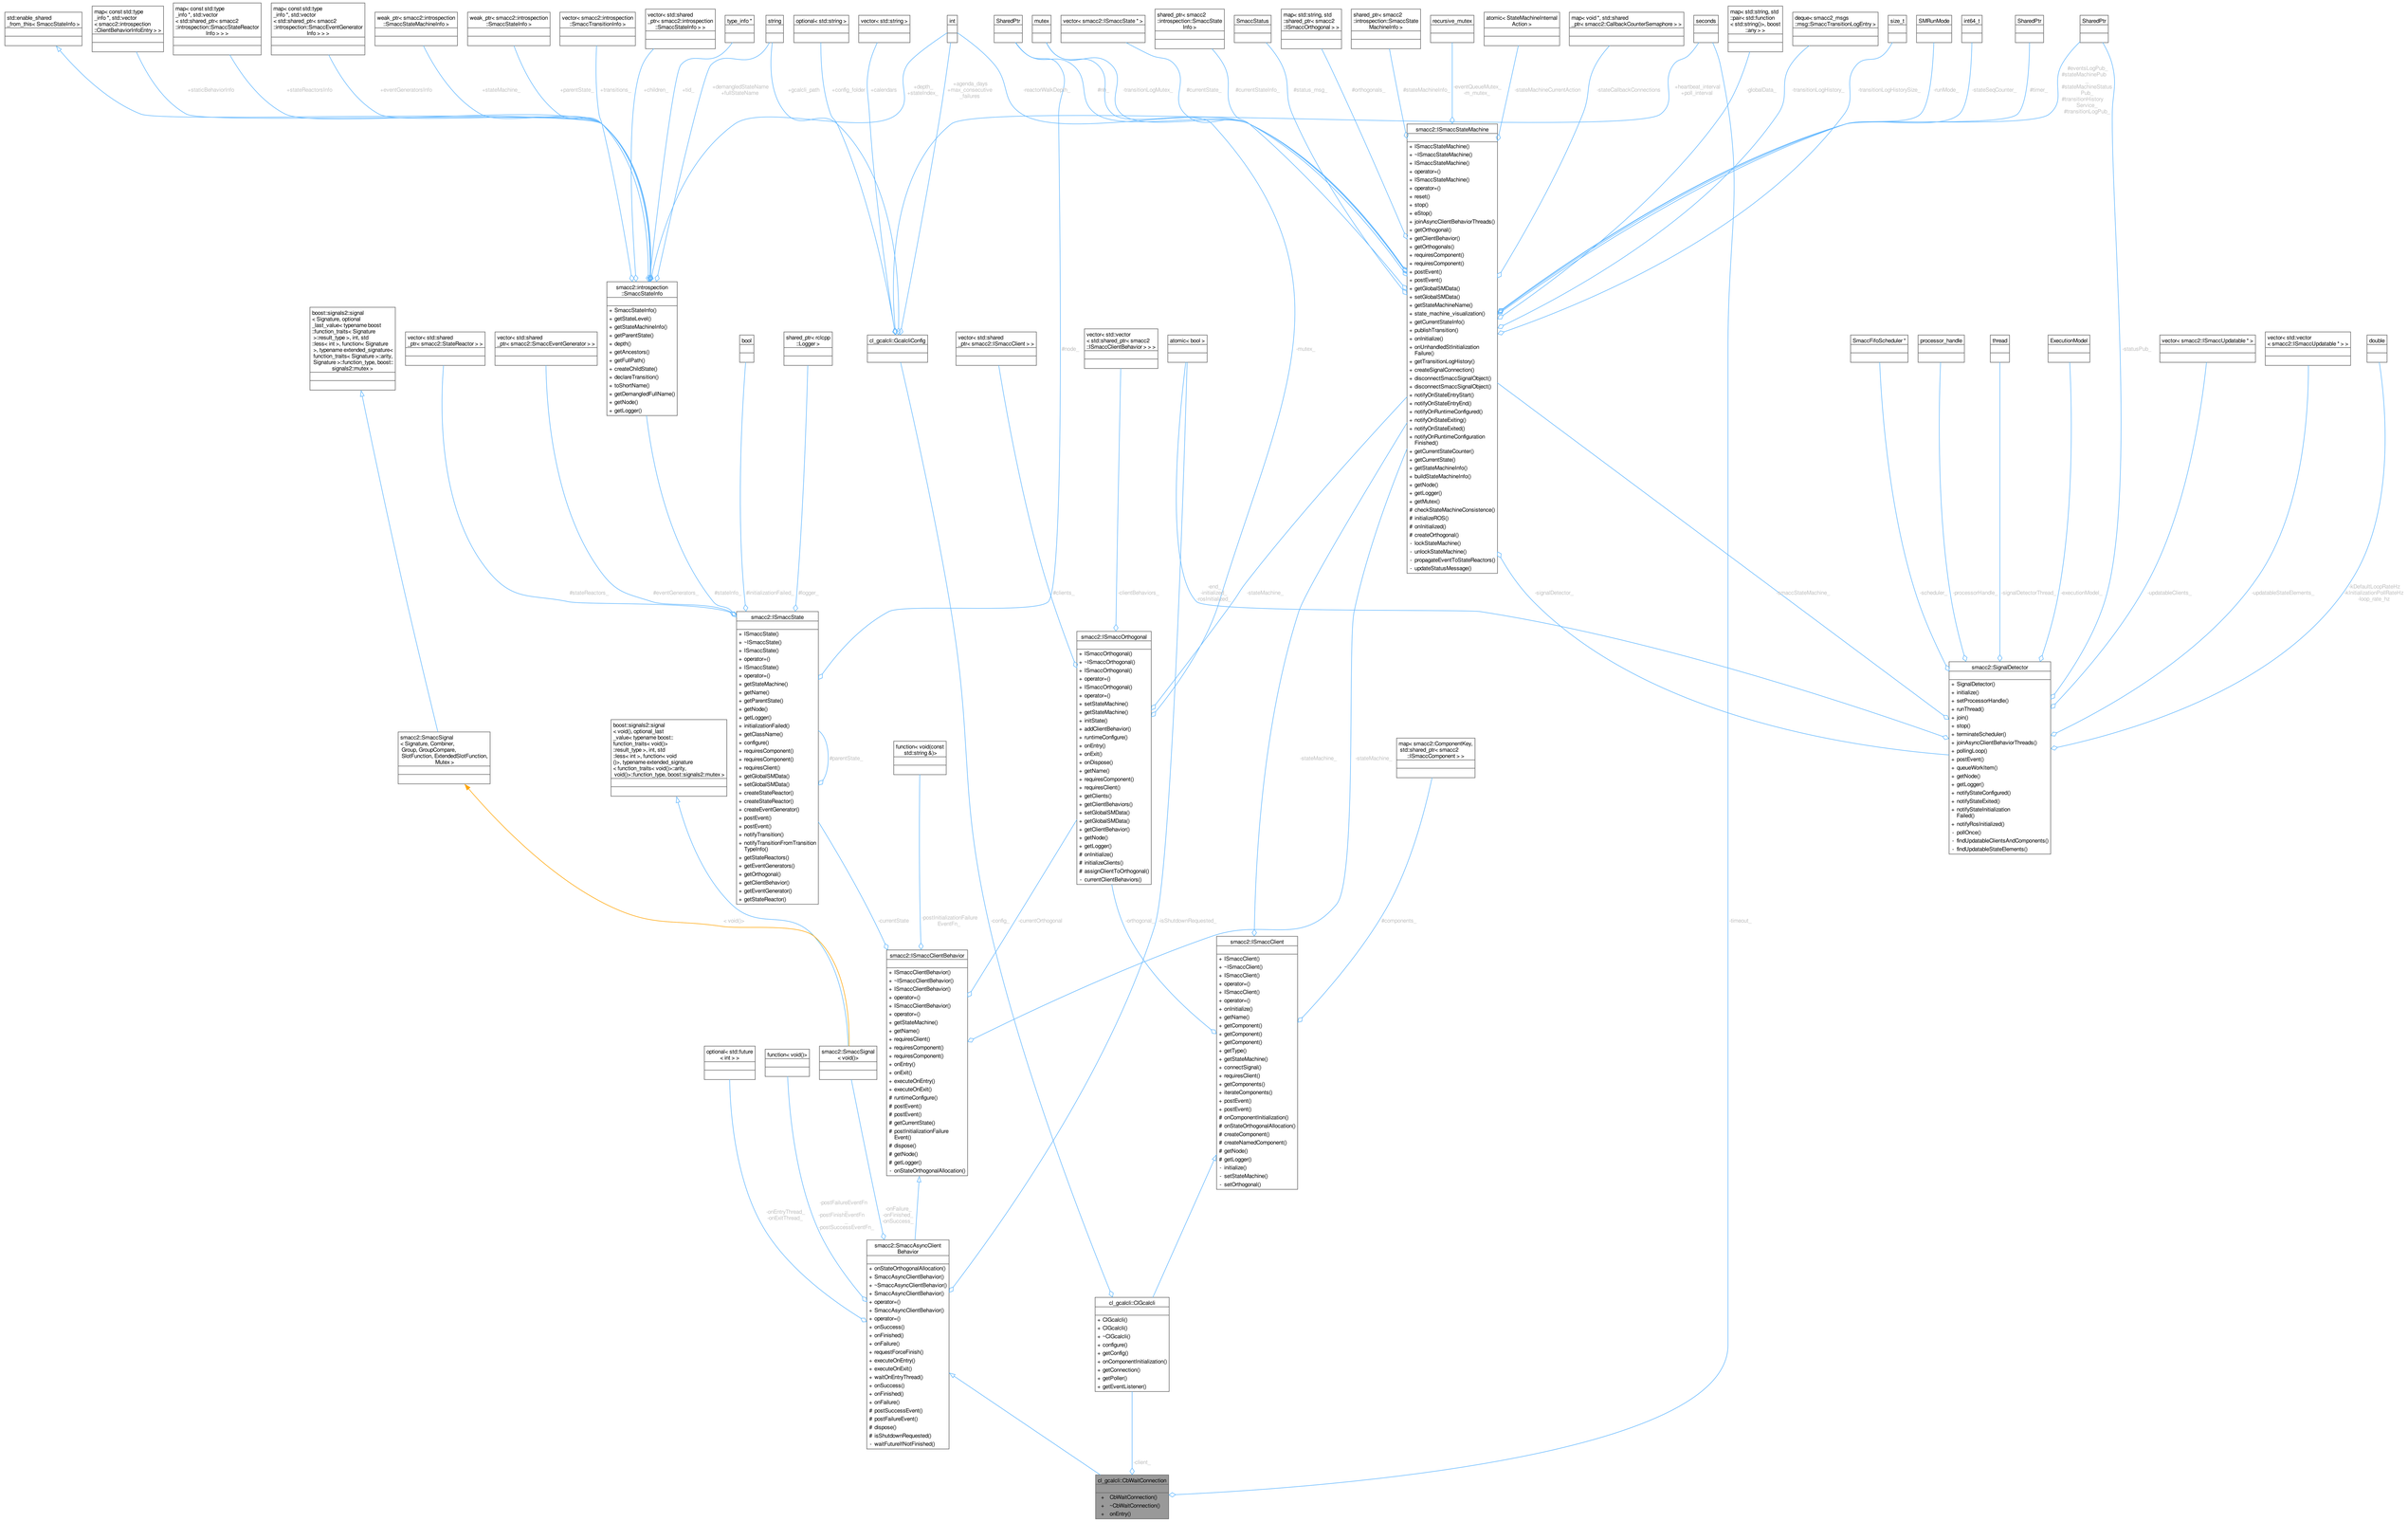
std::enable_shared_from_this< SmaccStateInfo >
map< const std::type_info*, std::vector< smacc2::introspection::SmaccClientBehaviorInfoEntry > >
map< const std::type_info*, std::vector< std::shared_ptr< smacc2::introspection::SmaccStateReactorInfo > > >
map< const std::type_info*, std::vector< std::shared_ptr< smacc2::introspection::SmaccEventGeneratorInfo > > >
weak_ptr< smacc2::introspection::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection::SmaccStateInfo >
vector< smacc2::introspection::SmaccTransitionInfo >
vector< std::shared_ptr< smacc2::introspection::SmaccStateInfo > >
type_info *
string
optional< std::string >
vector< std::string >
int
SharedPtr
mutex
vector< smacc2::ISmaccState * >
shared_ptr< smacc2::introspection::SmaccStateInfo >
SmaccStatus
map< std::string, std::shared_ptr< smacc2::ISmaccOrthogonal > >
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
recursive_mutex
atomic< StateMachineInternalAction >
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
seconds
map< std::string, std::any(-arr) std::function< std::string(>>, boost::any > >
deque< smacc2_msgs::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
SharedPtr
SharedPtr
+staticBehaviorInfo
+stateReactorsInfo
+eventGeneratorsInfo
+stateMachine_
+parentState_
+transitions_
+children_
+id_
+demangledStateName
+fullStateName
+pcalcli_path
+config_folder
+calendars
+depth
+stateIndex_
+agenda_days
+max_consecutive_failures
+reactorWalkDepth_
#mtx_
transitionLogMutex_
#currentStates_
#currentStateInfo_
#status_msg_
#orthogonals_
#stateMachineInfo_
eventQueueMutex
mtx_mutex_
+stateMachineCurrentAction
+stateCallbackConnections
+heartbeat_interval
+poll_interval
+globalData_
+transitionLogHistory_
+transitionLogHistorySize_
+runMode_
+stateSeqCounter_
#timer_
#eventsLogPub
#stateMachinePub
#stateMachineStatusPub_
#transitionHistoryService
#transitionLogPub_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ onUnhandledSt#initialization Failure()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection
::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
boost::signals2::signal
< Signature, optional
_last_value= typename boost
::function_traits< Signature
>::result_type >, int, std
::less< int >, function< Signature
>, typename extended_signature<
function_traits< Signature >::arity,
Signature>::function_type, boost::
signals2::mutex >
vector< std::shared
_ptr< smacc2::StateReactor > >
vector< std::shared
_ptr< smacc2::SmaccEventGenerator > >
bool
shared_ptr< rclcpp
::Logger >
cl_gcalcli::GcalcliConfig
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
atomic< bool >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector
< smacc2::ISmaccUpdatable * > >
double
#stateReactors_
#eventGenerators_
#stateInfo_
#initializationFailed_
#logger_
#clients_
#clientBehaviors_
#end_initialization#initialized_
-stateMachine_
#mutex_
-signalDetector_
-smaccStateMachine_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionModel_
-updatableClients_
-updatableStateElements_
#defaultLoopRate#cl
#initializationPollRate#cl
#loop_rate_hz
smacc2::ISmaccState
+ ISmaccState()
+ ~ISmaccState()
+ ISmaccState()
+ operator=()
+ ISmaccState()
+ operator=()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ initializationFailed()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyStateInitialization Failed()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::SmaccSignal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(), optional_last
_value< typename boost::
function_traits< void()>
::result_type >, int, std
::less< int >, function< void
()>, typename extended_signature
< function_traits< void()>::arity,
void()>::function_type, boost::signals2::mutex >
function< void(const
std::string &)>
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
-stateMachine_
-stateMachine_
-parentState_
-currentState_
postInitializationFailure
EventFn_
-config_
-currentOrthogonal
-orthogonal_
isShutdownRequested_
#components_
-timeout_
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
+ runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure Event()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getTypes()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
optional< std::future
< int > >
function< void()>
smacc2::SmaccSignal
< void()>
< void()>
-onEntryThread_
-onExitThread_
-postFailureEventFn
postFinishEventFn
postSuccessEventFn
-onFailure_
-onFinished_
onSuccess_
smacc2::SmaccAsyncClient
Behavior
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
cl_gcalcli::ClGcalcli
+ ClGcalcli()
+ ClGcalcli()
+ ~ClGcalcli()
+ configure()
+ getConfig()
+ onComponentInitialization()
+ getConnection()
+ getPoller()
+ getEventListener()
cl_gcalcli::ClWaitConnection
+ ClWaitConnection()
+ ~ClWaitConnection()
+ onEntry()
-client_