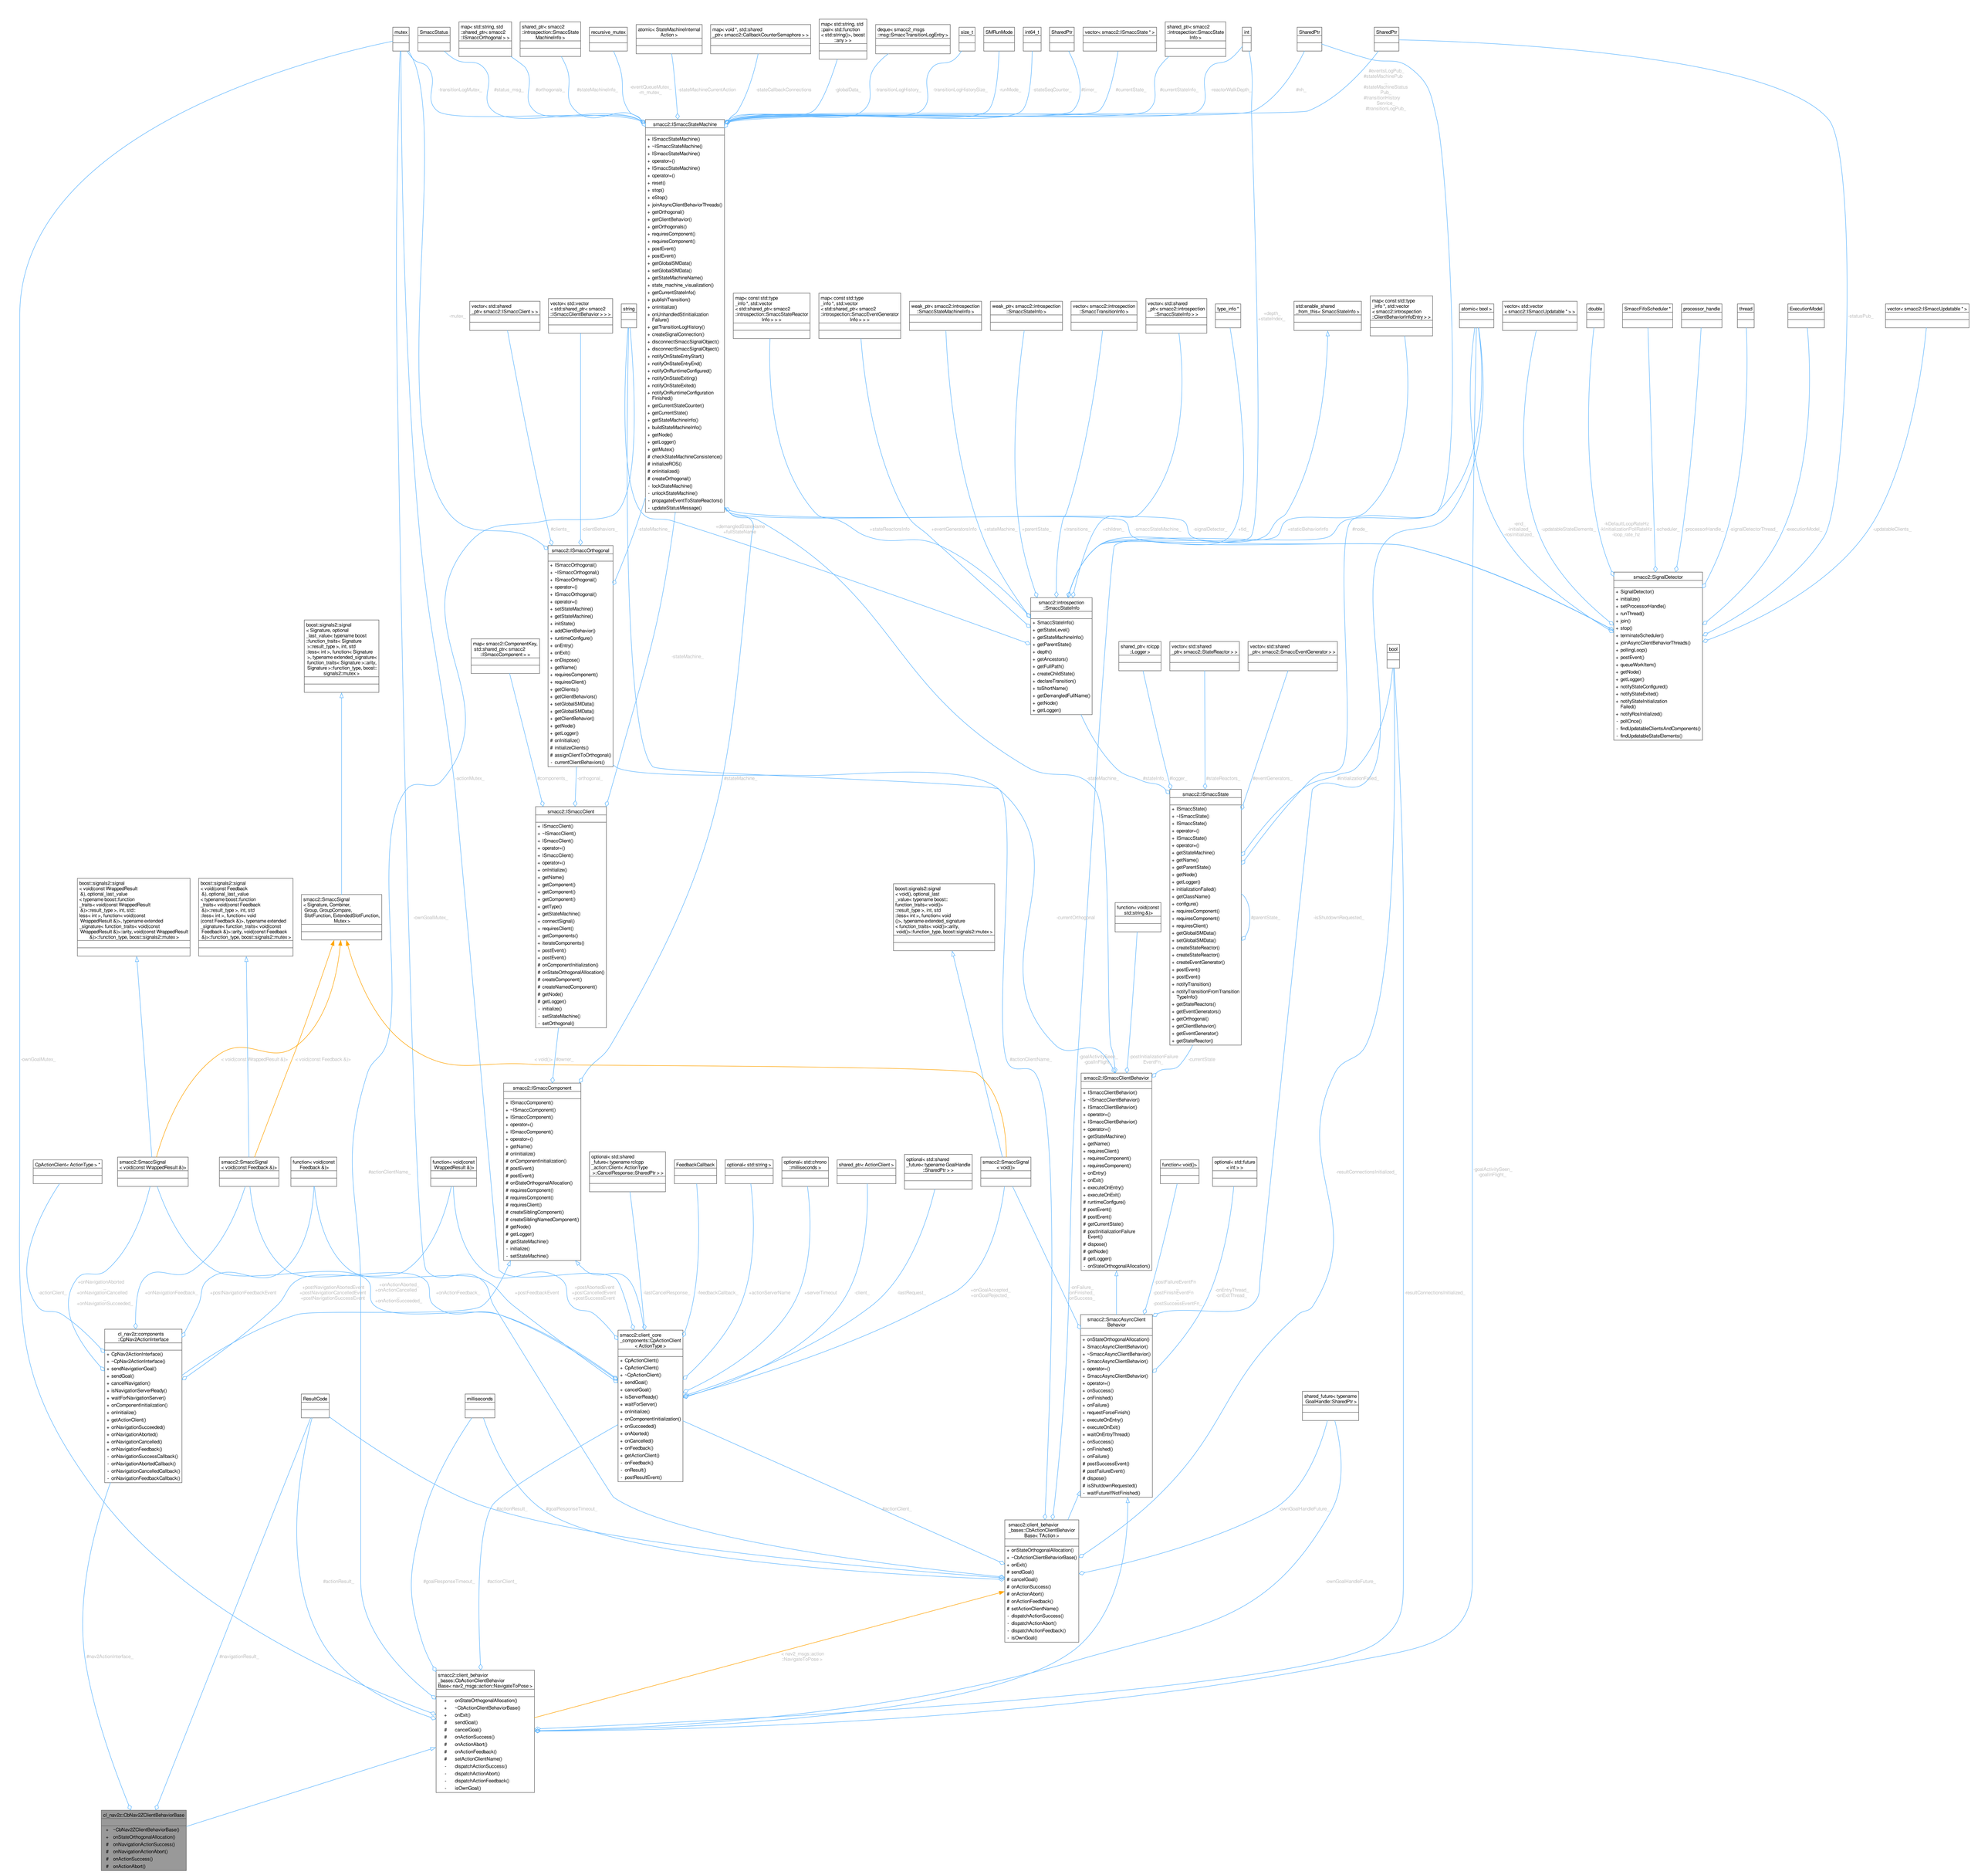
mutex
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
shared_ptr< smacc2 ::introspection::SmaccState MachineInfo >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string()>, boost ::any > >
deque< smacc2_msgs ::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2 ::introspection::SmaccState Info >
int
SharedPtr
SharedPtr
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ onUnhandledStInitialization Failure()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
vector< std::shared _ptr< smacc2::ISmaccClient > >
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
string
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccEventGenerator Info > > >
weak_ptr< smacc2::introspection ::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection ::SmaccStateInfo >
vector< smacc2::introspection ::SmaccTransitionInfo >
vector< std::shared _ptr< smacc2::introspection ::SmaccStateInfo > >
type_info *
std::enable_shared _from_this< SmaccStateInfo >
map< const std::type _info *, std::vector < smacc2::introspection ::ClientBehaviorInfoEntry > >
atomic< bool >
vector< std::vector < smacc2::ISmaccUpdatable * > >
double
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyStateInitialization Failed()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
boost::signals2::signal < Signature, optional _last_value= typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost:: signals2::mutex >
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
shared_ptr< rclcpp ::Logger >
vector< std::shared _ptr< smacc2::StateReactor > >
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
bool
smacc2::ISmaccState
+ ISmaccState()
+ ~ISmaccState()
+ ISmaccState()
+ operator=()
+ ISmaccState()
+ operator=()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ initializationFailed()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
boost::signals2::signal < void(const WrappedResult &), optional_last_value < typename boost::function _traits< void(const WrappedResult &)>::result_type >, int, std ::less< int >, function< void (const WrappedResult &)>, typename extended _signature< function_traits< void(const WrappedResult &)>::arity, void(const WrappedResult &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const Feedback &), optional_last_value < typename boost::function _traits< void(const Feedback &)>::result_type >, int, std ::less< int >, function< void (const Feedback &)>, typename extended _signature< function_traits< void(const Feedback &)>::arity, void(const Feedback &)>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal < void(), optional_last _value< typename boost:: function_traits< void()> ::result_type >, int, std ::less< int >, function< void ()>, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
function< void(const std::string &)>
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure (Event)
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
CpActionClient< ActionType > *
smacc2::SmaccSignal < void(const WrappedResult &)>
smacc2::SmaccSignal < void(const Feedback &)>
function< void(const Feedback &)>
function< void(const WrappedResult &)>
optional< std::shared _future< typename rclcpp ::action::Client< ActionType >::CancelResponse::SharedPtr > >
FeedbackCallback
optional< std::string >
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
optional< std::shared _future< typename GoalHandle ::SharedPtr > >
smacc2::SmaccSignal < void()>
function< void()>
optional< std::future < int > >
cl_nav2z::components ::CpNav2ActionInterface
+ CpNav2ActionInterface()
+ ~CpNav2ActionInterface()
+ sendNavigationGoal()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()
+ onInitialize()
+ getActionClient()
+ onNavigationSucceeded()
+ onNavigationAborted()
+ onNavigationCanceled()
+ onNavigationFeedback()
- onNavigationSuccessCallback()
- onNavigationAbortedCallback()
- onNavigationCanceledCallback()
- onNavigationFeedbackCallback()
smacc2::client_core _components::CpActionClient < ActionType >
+ CpActionClient()
+ CpActionClient()
+ ~CpActionClient()
+ sendGoal()
+ cancelGoal()
+ isServerReady()
+ waitForServer()
+ onInitialize()
+ onComponentInitialization()
+ onSucceeded()
+ onAborted()
+ onCancelled()
+ onFeedback()
+ getActionClient()
- onFeedback()
- onResult()
- postResultEvent()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
ResultCode
milliseconds
shared_future< typename GoalHandle::SharedPtr >
smacc2::client_behavior _bases::CbActionClientBehavior Base< TAction >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
- isOwnGoal()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::NavigateToPose >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
- isOwnGoal()
cl_nav2z::CbNav2ZClientBehaviorBase
+ ~CbNav2ZClientBehaviorBase()
+ onStateOrthogonalAllocation()
# onNavigationActionSuccess()
# onNavigationActionAbort()
# onActionSuccess()
# onActionAbort()
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
-mutex_
-clients_
-clientBehaviors_
-stateMachine_
+demangledStateName _fullStateName_
+stateReactorsInfo
+eventGeneratorsInfo
+stateMachine_
+parentState_
+transitions_
+children_
-smaccStateMachine_
-signalDetector_
-id_
+depth_ +stateIndex_
+staticBehaviorInfo
#node_
-end_ -initialized_ -notInitialized_
-updatableStateElements_
+kDefaultLoopRateHz +kInitializationRollRateHz -loop_rate_hz_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionModel_
-updatableClients_
-statusPub_
-transitionLogMutex_
#status_msg_
#orthogonals_
#stateMachineInfo_
-eventQueueMutex_ -m_mutex_
-stateMachineCurrentAction
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-stateSeqCounter_
#timer_
#currentState_
#currentStateInfo_
-reactorWalkDepth_
#m_
#eventsLogPub_ #stateMachinePub
#stateMachineStatus Pub_ #transitionHistory Service_ #transitionLogPub_
-actionMutex_
#components_
-orthogonal_
#stateMachine_
-stateMachine_
#stateInfo_
#logger_
#stateReactors_
#eventGenerators_
#initializationFailed_
-ownGoalMutex_
-currentOrthogonal
#parentState_
-isShutdownRequested_
#actionClientName_
-goalActivityBeen_ -goalInFlight_
-postInitializationFailure EventFn_
-currentState
-resultConnectionsInitialized_
-goalActivityBeen_ -goalInFlight_
-owner_
< void()>
< void(const WrappedResult &)>
< void(const Feedback &)>
-actionClient_
+onNavigationAborted
+onNavigationCancelled
+onNavigationSucceeded_
+onNavigationFeedback_
+postNavigationFeedbackEvent
+postNavigationAbortedEvent +postNavigationCancelledEvent +postNavigationSuccessEvent
+onActionAborted_ +onActionCancelled
+onActionSucceeded_
+onActionFeedback_
+postFeedbackEvent
+postAbortedEvent +postCancelledEvent +postSuccessEvent
-lastCancelResponse_
-feedbackCallback_
+actionServerName
+serverTimeout
-client_
-lastRequest_
+onGoalAccepted_ +onGoalRejected_
-onFailure_ -onFinished_ -onSuccess_
-postFailureEventFn_
-postFinishedEventFn_
-postSuccessEventFn_
-onEntryThread_ -onExitThread_
-actionResult_
#goalResponseTimeout_
#actionClient_
-ownGoalHandleFuture_
#nav2zActionInterface_
#navigationResult_
< nav2_msgs::action ::NavigateToPose >
boost::signals2::signal < void(const WrappedResult &), optional_last_value < typename boost::function _traits< void(const WrappedResult &)>::result_type >, int, std ::less< int >, function< void (const WrappedResult &)>, typename extended _signature< function_traits< void(const WrappedResult &)>::arity, void(const WrappedResult &)>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const Feedback &), optional_last_value < typename boost::function _traits< void(const Feedback &)>::result_type >, int, std ::less< int >, function< void (const Feedback &)>, typename extended _signature< function_traits< void(const Feedback &)>::arity, void(const Feedback &)>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal < void(), optional_last _value< typename boost:: function_traits< void()> ::result_type >, int, std ::less< int >, function< void ()>, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
function< void(const std::string &)>
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure (Event)
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
CpActionClient< ActionType > *
smacc2::SmaccSignal < void(const WrappedResult &)>
smacc2::SmaccSignal < void(const Feedback &)>
function< void(const Feedback &)>
function< void(const WrappedResult &)>
optional< std::shared _future< typename rclcpp ::action::Client< ActionType >::CancelResponse::SharedPtr > >
FeedbackCallback
optional< std::string >
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
optional< std::shared _future< typename GoalHandle ::SharedPtr > >
smacc2::SmaccSignal < void()>
function< void()>
optional< std::future < int > >
cl_nav2z::components ::CpNav2ActionInterface
+ CpNav2ActionInterface()
+ ~CpNav2ActionInterface()
+ sendNavigationGoal()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()
+ onInitialize()
+ getActionClient()
+ onNavigationSucceeded()
+ onNavigationAborted()
+ onNavigationCanceled()
+ onNavigationFeedback()
- onNavigationSuccessCallback()
- onNavigationAbortedCallback()
- onNavigationCanceledCallback()
- onNavigationFeedbackCallback()
smacc2::client_core _components::CpActionClient < ActionType >
+ CpActionClient()
+ CpActionClient()
+ ~CpActionClient()
+ sendGoal()
+ cancelGoal()
+ isServerReady()
+ waitForServer()
+ onInitialize()
+ onComponentInitialization()
+ onSucceeded()
+ onAborted()
+ onCancelled()
+ onFeedback()
+ getActionClient()
- onFeedback()
- onResult()
- postResultEvent()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
ResultCode
milliseconds
shared_future< typename GoalHandle::SharedPtr >
smacc2::client_behavior _bases::CbActionClientBehavior Base< TAction >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
- isOwnGoal()
smacc2::client_behavior _bases::CbActionClientBehavior Base< nav2_msgs::action::NavigateToPose >
+ onStateOrthogonalAllocation()
+ ~CbActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAbort()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAbort()
- dispatchActionFeedback()
- isOwnGoal()
cl_nav2z::CbNav2ZClientBehaviorBase
+ ~CbNav2ZClientBehaviorBase()
+ onStateOrthogonalAllocation()
# onNavigationActionSuccess()
# onNavigationActionAbort()
# onActionSuccess()
# onActionAbort()
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
-ownGoalMutex_
-mutex_
-clients_
-clientBehaviors_
-stateMachine_
+demangledStateName _fullStateName_
+stateReactorsInfo
+eventGeneratorsInfo
+stateMachine_
+parentState_
+transitions_
+children_
-smaccStateMachine_
-signalDetector_
-id_
+depth_ +stateIndex_
+staticBehaviorInfo
#node_
-end_ -initialized_ -notInitialized_
-updatableStateElements_
+kDefaultLoopRateHz +kInitializationRollRateHz -loop_rate_hz_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionModel_
-updatableClients_
-statusPub_
-transitionLogMutex_
#status_msg_
#orthogonals_
#stateMachineInfo_
-eventQueueMutex_ -m_mutex_
-stateMachineCurrentAction
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-stateSeqCounter_
#timer_
#currentState_
#currentStateInfo_
-reactorWalkDepth_
#m_
#eventsLogPub_ #stateMachinePub
#stateMachineStatus Pub_ #transitionHistory Service_ #transitionLogPub_
-actionMutex_
#components_
-orthogonal_
#stateMachine_
-stateMachine_
#stateInfo_
#logger_
#stateReactors_
#eventGenerators_
#initializationFailed_
-ownGoalMutex_
-currentOrthogonal
#parentState_
-isShutdownRequested_
#actionClientName_
-goalActivityBeen_ -goalInFlight_
-postInitializationFailure EventFn_
-currentState
-resultConnectionsInitialized_
-goalActivityBeen_ -goalInFlight_
-owner_
< void()>
< void(const WrappedResult &)>
< void(const Feedback &)>
-actionClient_
+onNavigationAborted
+onNavigationCancelled
+onNavigationSucceeded_
+onNavigationFeedback_
+postNavigationFeedbackEvent
+postNavigationAbortedEvent +postNavigationCancelledEvent +postNavigationSuccessEvent
+onActionAborted_ +onActionCancelled
+onActionSucceeded_
+onActionFeedback_
+postFeedbackEvent
+postAbortedEvent +postCancelledEvent +postSuccessEvent
-lastCancelResponse_
-feedbackCallback_
+actionServerName
+serverTimeout
-client_
-lastRequest_
+onGoalAccepted_ +onGoalRejected_
-onFailure_ -onFinished_ -onSuccess_
-postFailureEventFn_
-postFinishedEventFn_
-postSuccessEventFn_
-onEntryThread_ -onExitThread_
-actionResult_
#goalResponseTimeout_
#actionClient_
-ownGoalHandleFuture_
#nav2zActionInterface_
#navigationResult_
< nav2_msgs::action ::NavigateToPose >
-resultConnectionsInitialized_
-ownGoalHandleFuture_