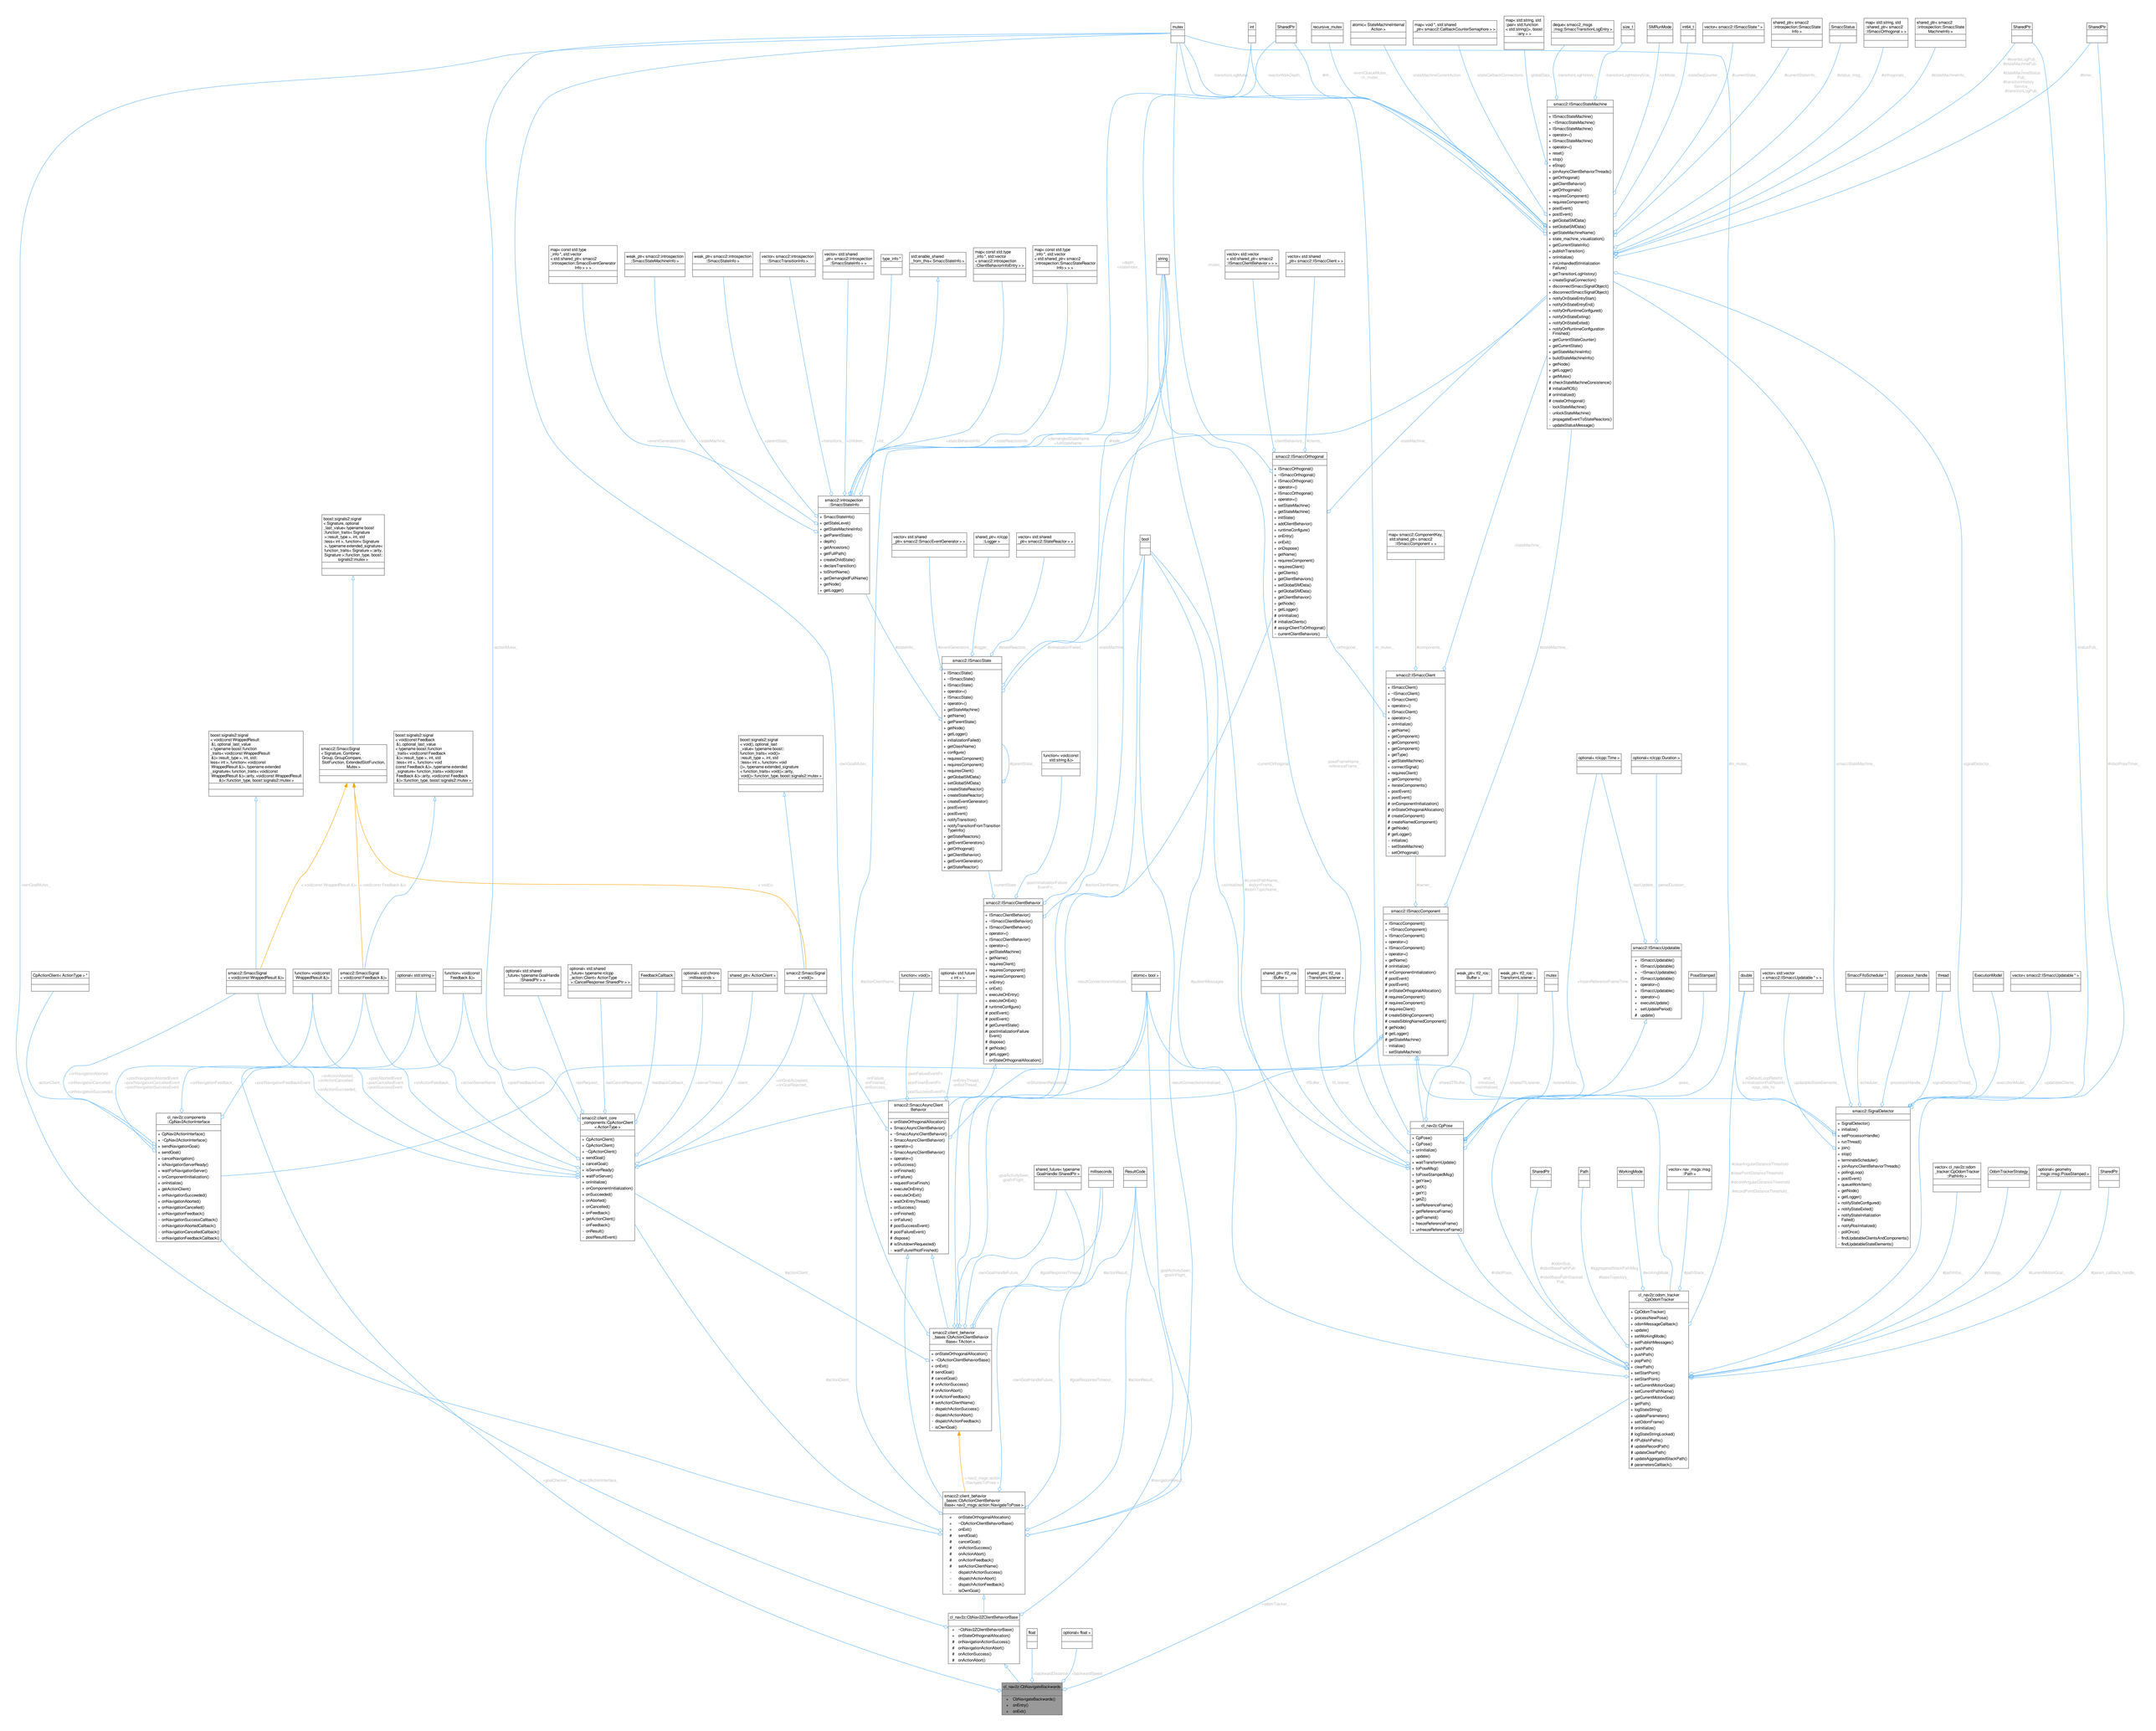
mutex
int
SharedPtr
recursive_mutex
atomic< StateMachineInternal Action >
map< void*, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string(), bool >, any > >
deque< smacc2::msgs ::msg::SmaccTransitionLogEntry >
size_t
SMRuntMode
int64_t
vector< smacc2::ISmaccState* >
shared_ptr< smacc2 ::introspection::SmaccState Info >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal* > >
shared_ptr< smacc2 ::introspection::SmaccState MachineInfo >
SharedPtr
SharedPtr
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ initialize()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentState()
+ publishTransition()
+ onInitialize()
+ onUnhandledSmInitialization Failure()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnect(SmaccSignalObject)
+ disconnect(SmaccSignalObject)
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateInfo > > >
weak_ptr< smacc2::introspection ::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection ::SmaccStateInfo >
vector< smacc2::introspection ::SmaccTransitionInfo >
vector< std::shared _ptr< smacc2::introspection ::SmaccStateInfo > >
type_info *
std::enable_shared _from_this< SmaccStateInfo >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::ISmaccClientBehaviorEntryInfo > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
vector< std::shared _ptr< smacc2::ISmaccClient > >
string
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
vector< std::shared _ptr< smacc2::ISmaccEventGenerator > >
shared_ptr< rclcpp ::Logger >
vector< std::shared _ptr< smacc2::StateReactor > >
tool
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > * >
smacc2::ISmaccState
+ ISmaccState()
+ ~ISmaccState()
+ ISmaccState()
+ operator=()
+ ISmaccState()
+ operator=()
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ initializationFailed()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ onInitialize()
+ getName()
+ getComponents()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
optional< rclcpp::Time >
optional< rclcpp::Duration >
boost::signals2::signal
< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
smacc2::SmaccSignal
< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal
< void(const WrappedResult &)>
boost::signals2::signal
< void(const Feedback &)>
boost::signals2::signal
< void()>
boost::signals2::signal
< void(const WrappedResult &)>
boost::signals2::signal
< void(const Feedback &)>
CpActionClient< ActionType > *
smacc2::SmaccSignal
< void(const WrappedResult &)>
function< void(const WrappedResult &)>
smacc2::SmaccSignal
< void(const Feedback &)>
optional< std::string >
function< void(const Feedback &)>
optional< std::shared _future< typename rclcpp::GoalHandle< SharedPtr > > >
optional< std::shared _future< typename rclcpp ::action::Client< ActionType > ::CancelResponse::SharedPtr > >
FeedbackCallback
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
smacc2::SmaccSignal
< void()>
function< void()>
optional< std::future < int > >
boost::signals2::signal
< void(), typename boost::
function_traits< void()>
::result_type, int, std
::less< int >, function< void()>
, std::allocator< boost::signature
< function_traits< void()>::arity,
void()>>,function_type, boost::signals2::mutex >
function< void(const std::string &)>
atomic< bool >
shared_ptr< tf2_ros ::Buffer >
shared_ptr< tf2_ros ::TransformListener >
weak_ptr< tf2_ros::Buffer >
weak_ptr< tf2_ros::TransformListener >
mutex
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ ISmaccUpdatable()
+ operator=()
+ ISmaccUpdatable()
+ operator=()
+ execute(Update)
+ setUpdatePeriod()
# update()
PoseStamped
double
vector< std::vector < smacc2::ISmaccUpdatable* > >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable* >
CpActionClient< ActionType >
smacc2::ISmaccSignal
< void(const WrappedResult &)>
function< void(const WrappedResult &)>
smacc2::ISmaccSignal
< void(const Feedback &)>
optional< std::string >
function< void(const Feedback &)>
optional< std::shared _future< typename rclcpp::GoalHandle< SharedPtr > > >
optional< std::shared _future< typename rclcpp ::action::Client< ActionType > ::CancelResponse::SharedPtr > >
FeedbackCallback
optional< std::chrono ::milliseconds >
shared_ptr< ActionClient >
smacc2::SmaccSignal
< void()>
cl_nav2z::components ::CpNav2ActionInterface
+ CpNav2ActionInterface()
+ ~CpNav2ActionInterface()
+ sendNavigationGoal()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()
+ onInitialize()
+ getActionClient()
+ onNavigationSucceeded()
+ onNavigationAborted()
+ onNavigationCancelled()
+ onNavigationFeedback()
- onNavigationSuccessCallback()
- onNavigationAbortedCallback()
- onNavigationCanceledCallback()
- onNavigationFeedbackCallback()
smacc2::client_core ::components::CpActionClient < ActionType >
+ CpActionClient()
+ CpActionClient()
+ ~CpActionClient()
+ sendGoal()
+ cancelGoal()
+ isServerReady()
+ waitForServer()
+ onInitialize()
+ onComponentInitialization()
+ onSucceeded()
+ onAborted()
+ onCancelled()
+ onFeedback()
- getActionClient()
- onFeedback()
- onResult()
- postResultEvent()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestFinishedFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
shared_future< typename GoalHandle::SharedPtr >
milliseconds
ResultCode
smacc2::client_behavior _bases::CpActionClientBehavior Base< TAction >
+ onStateOrthogonalAllocation()
+ ~CpActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAborted()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAborted()
- dispatchActionFeedback()
- isOwnGoal()
cl_nav2z::CpPose
+ CpPose()
+ CpPose()
+ onInitialize()
+ update()
+ waitTransformUpdate()
+ toPoseMsg()
+ toPoseStampedMsg()
+ getYaw()
+ getX()
+ getY()
+ getZ()
+ setReferenceFrame()
+ getReferenceFrame()
+ getFrameId()
+ freezeReferenceFrame()
+ unfreezeReferenceFrame()
SharedPtr
Path
WorkingMode
vector< nav_msgs::msg ::Path >
cl_nav2z::odom_tracker ::CpOdomTracker
+ CpOdomTracker()
+ processNewPose()
+ odomMessageCallback()
+ update()
+ setWorkingMode()
+ setPublishMessages()
+ pushPath()
+ pushPath()
+ popPath()
+ clearPath()
+ setStartPoint()
+ setStartPoint()
+ setCurrentMotionGoal()
+ setCurrentPathName()
+ getCurrentMotionGoal()
+ getPath()
+ logStateString()
+ updateParameters()
+ setOdomFrame()
+ onInitialize()
# logStateStringLocked()
# rtPublishPaths()
# updateRecordPath()
# updateClearPath()
# updateAggregatedStackPath()
# parameterCallback()
vector< cl_nav2z::odom ::TrackingInfo >
OdomTrackerStrategy
optional< geometry ::msgs::msg::PoseStamped >
SharedPtr
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyStateInitialization Failed()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateReactors()
boost::signals2::signal
< void(), typename boost::
function_traits< void()>
::result_type, int, std
::less< int >, function< void()>
, std::allocator< boost::signature
< function_traits< void()>::arity,
void()>>,function_type, boost::signals2::mutex >
function< void(const std::string &)>
cl_nav2z::ClNavigateBackwards
+ ClNavigateBackwards()
+ onEntry()
+ onExit()
cl_nav2z::ClNav2ClientBehaviorBase
+ ~ClNav2ClientBehaviorBase()
+ onStateOrthogonalAllocation()
# onNavigationActionSuccess()
# onNavigationActionAbort()
# onActionSuccess()
# onActionAborted()
float
optional< float >
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
+ runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure Event()
# dispose()
# getLogger()
- onStateOrthogonalAllocation()
smacc2::client_behavior _bases::CpActionClientBehavior Base< nav2_msgs::action::NavigateToPose >
+ onStateOrthogonalAllocation()
+ ~CpActionClientBehaviorBase()
+ onExit()
# sendGoal()
# cancelGoal()
# onActionSuccess()
# onActionAborted()
# onActionFeedback()
# setActionClientName()
- dispatchActionSuccess()
- dispatchActionAborted()
- dispatchActionFeedback()
- isOwnGoal()
cl_nav2z::CpNav2ClientBehaviorBase
+ ~ClNav2ClientBehaviorBase()
+ onStateOrthogonalAllocation()
# onNavigationActionSuccess()
# onNavigationActionAbort()
# onActionSuccess()
# onActionAborted()
float
optional< float >
cl_nav2z::ClNavigateBackwards
+ ClNavigateBackwards()
+ onEntry()
+ onExit()