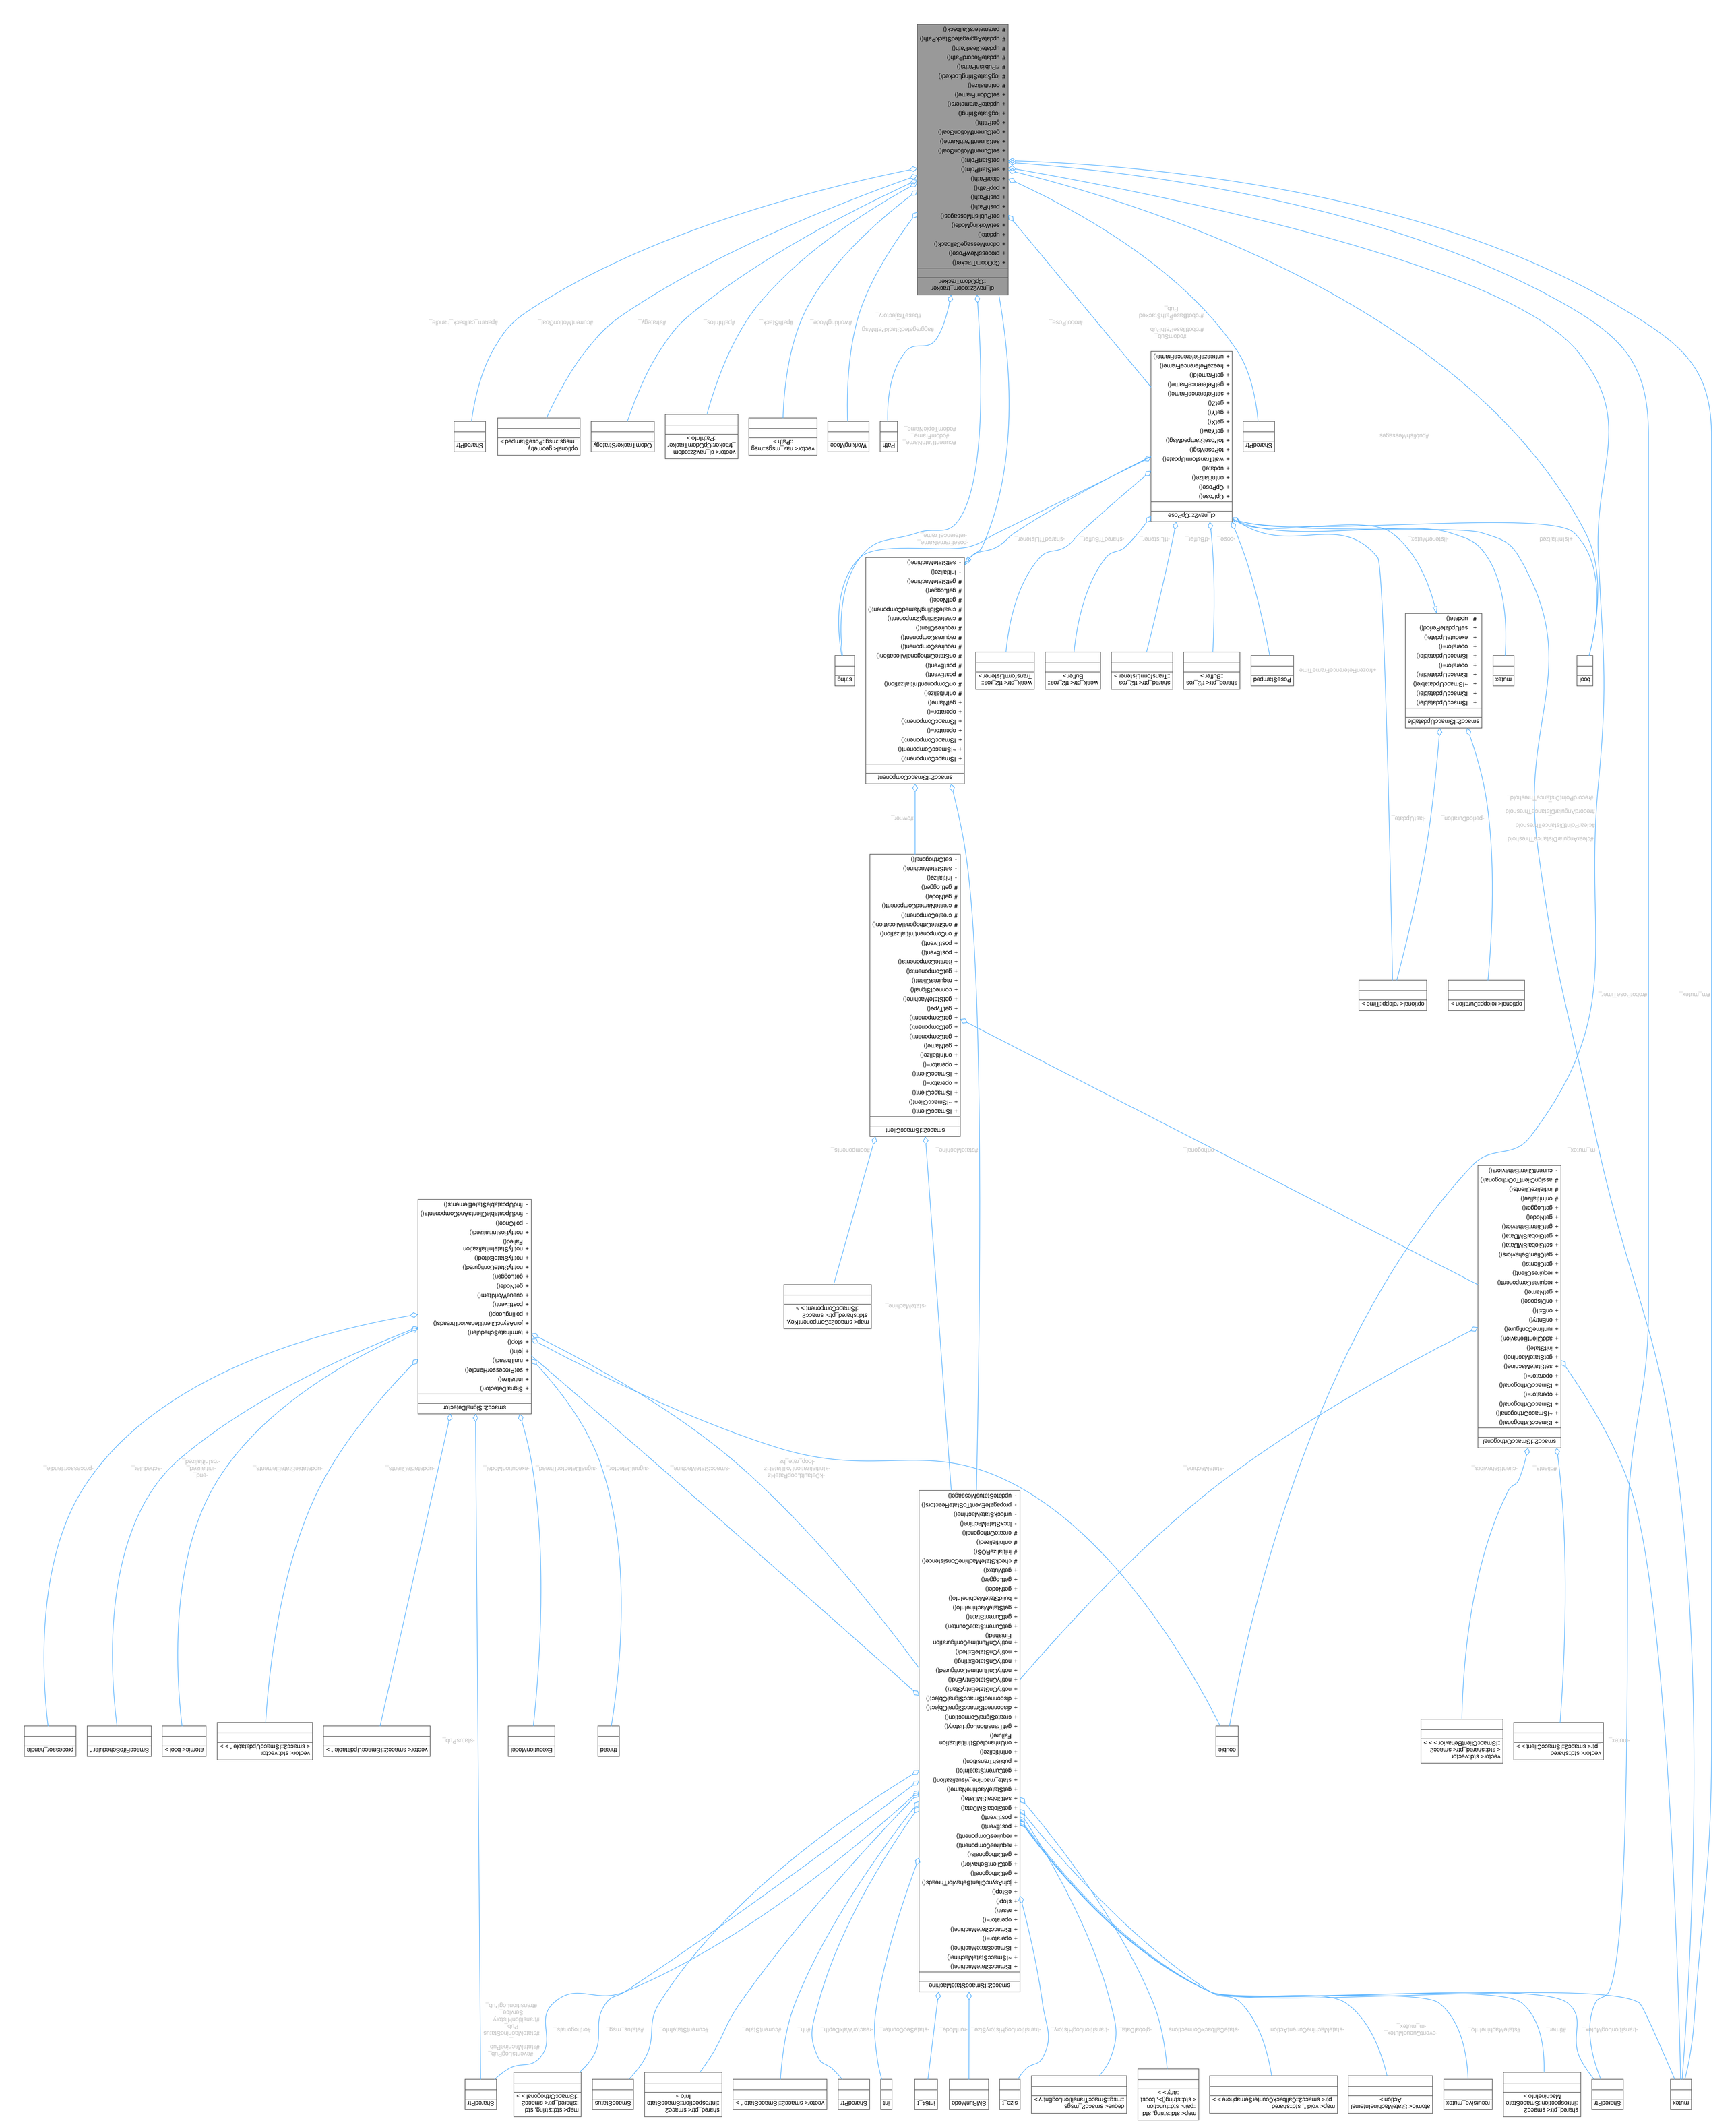
cl_nav2::odom_Tracker
::OdomTracker
+ OdomTracker()
+ processNewPose()
+ odomMessageCallback()
+ update()
+ setWorkingMode()
+ setPublishMessages()
+ pushPath()
+ pushFarPath()
+ popPath()
+ clearPath()
+ setSlamPoint()
+ setSlamPoint()
+ setCurrentMotionGoal()
+ setCurrentPathName()
+ getCurrentPathName()
+ getPath()
+ logSlateSmmg()
+ updateParameters()
+ selOdomFrame()
+ onInitialize()
# logSlateSmmgLocked()
# rPublishPaths()
# updateRecordPath()
# updateClearPath()
# updateAggregatedStackPath()
# parameterSCallback()
#odomTrackerImpl_
#recordPointDistance_
#recordAngularDistance_
#clearPointDistance_
#clearAngularDistance_
#param_callback_handle_
#currentMotionGoal_
#strategy_
#pathInfos_
#pathStack_
#workingMode_
#aggregatedStackPath_
#baseTrajectory_
#odomTopicName_
#currentPathName_
#odomSub_
#recordBasePathStacked
PubSub_
#recordBasePathPub
#robotPose_
#publishMessages
SharedPtr
vector< nav_msgs::msg
::Path >
WorkingMode
Path
OdomTrackerStrategy
optional< geometry
_msgs::msg::PoseStamped >
SharedPtr
cl_nav2::CPPose
+ CPPose()
+ CPPose()
+ onInitialize()
+ updated()
+ waitTransformUpdated()
+ toPoseMsg()
+ toPoseStampedMsg()
+ getYaw()
+ getX()
+ getY()
+ getZ()
+ setReferenceFrame()
+ getReferenceFrame()
+ getFrameId()
+ freezeReferenceFrame()
+ unfreezeReferenceFrame()
-pose_
-tfBuffer_
-tfListener_
-sharedTfBuffer_
-sharedTfListener_
-poseFrameName_
-referenceFrame_
+frozenReferenceFrame
PoseStamped
shared_ptr< tf2_ros
::Buffer >
shared_ptr< tf2_ros
::TransformListener >
weak_ptr< tf2_ros::
Buffer >
weak_ptr< tf2_ros::
TransformListener >
string
bool
mutex
+isInitialized
-listenerMutex_
-clearAngularDistanceThreshold_
-clearPointDistanceThreshold_
-recordAngularDistanceThreshold_
-recordPointDistanceThreshold_
-periodDuration_
-lastUpdate_
optional< rclcpp::Duration >
optional< rclcpp::Time >
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ getGlobalSMData()
+ setGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
+ onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
#clients_
#clientBehaviors_
#mutex_
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
#orthogonals_
#stateMachine_
#components_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ getName()
+ onInitialize()
+ getComponent()
+ getComponent()
+ getComponent()
+ getComponent()
+ getComponent()
+ getName()
+ getTypeI()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
-stateMachine_
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ getGlobalSMData()
+ setGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
-stateMachine_
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
+ onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
-stateMachine_
-pose_
-tfBuffer_
-tfListener_
-sharedTfBuffer_
-sharedTfListener_
-poseFrameName_
-referenceFrame_
string
WeakPtr
TransformListener >
WeakPtr
Buffer >
SharedPtr
TransformListener >
SharedPtr
PoseStamped
+frozenReferenceFrame
SharedPtr
bool
mutex
+isInitialized
-listenerMutex_
-clearAngularDistanceThreshold_
-clearPointDistanceThreshold_
-recordAngularDistanceThreshold_
-recordPointDistanceThreshold_
-periodDuration_
-lastUpdate_
optional< rclcpp::Duration >
optional< rclcpp::Time >
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ getGlobalSMData()
+ setGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
#clients_
#clientBehaviors_
#mutex_
vector< std::shared
_ptr< smacc2::ISmaccClient > >
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
#orthogonals_
#stateMachine_
#components_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ getName()
+ onInitialize()
+ getComponent()
+ getComponent()
+ getComponent()
+ getComponent()
+ getComponent()
+ getName()
+ getTypeI()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
-stateMachine_
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ getGlobalSMData()
+ setGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
-stateMachine_
-transitionLogMutex_
-timer_
-stateMachineMutex_
-eventQueueMutex_
-m_mutex_
-stateMachineCurrentAction
-stateCallBackConnections
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-actorVaildDepth_
-stateSeqCounter_
-stateMsg_
-orthogonals_
-currentStateInfo_
-currentState_
-mutex_
-eventLogPub_
-stateMachineInfoPub_
-stateMachineStatus
Pub_
-transitionLogPub_
-defaultLoopRate_hz
-initializationPeriod_hz
-signalDetector_
-smaccStateMachine_
-executionModel_
-signalDetectorThread_
-updateStateClients_
-updateStateElements_
-initialized_
-end_
-scheduler_
-processorHandle_
SharedPtr
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal > >
SmaccStatus
shared_ptr< smacc2
::InterpolationState
Info >
vector< smacc2::SmaccState * >
SharedPtr
int
int64_t
SMRuntimeMode
size_t
deque< smacc2_msgs
::msg::SmaccTransitionLogEntry >
map< std::string, std
::pair< std::function
< std::string()>, bool>
< any > >
map< void *, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
atomic< StateMachineInternal
Action >
recursive_mutex
shared_ptr< smacc2
::InterpolationState
MachineInfo >
SharedPtr
mutex
vector< std::vector
< smacc2::ISmaccClientBehavior > > >
vector< std::shared
_ptr< smacc2::ISmaccClient > >
double
vector< std::vector
< smacc2::ISmaccClientBehavior > > >
vector< std::shared
_ptr< smacc2::ISmaccClient > >
double
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * > >
vector< std::vector
< smacc2::ISmaccUpdatable * > >
atomic< bool >
SmaccFifoScheduler *
processor_handle
smacc2::ISignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyStateInitialization
Failed()
+ notifyFbsInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
-stateMachine_
-executionModel_
-signalDetectorThread_
-signalDetector_
-smaccStateMachine_
-initialized_
-end_
-scheduler_
-processorHandle_
-updateStateClients_
-updateStateElements_
-executionModel_
-signalDetectorThread_
-signalDetector_
-smaccStateMachine_
-kDefaultLoopRateHz
-initializationPeriodHz
-loop_rate_hz
-stateMachine_
-clientBehaviors_
-clients_
-mutex_
-transitionLogMutex_
-timer_
-stateMachineMutex_
-eventQueueMutex_
-m_mutex_
-stateMachineCurrentAction
-stateCallBackConnections
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-actorVaildDepth_
-stateSeqCounter_
-stateMsg_
-orthogonals_
-currentStateInfo_
-currentState_
-mutex_
-eventLogPub_
-stateMachineInfoPub_
-stateMachineStatus
Pub_
-transitionLogPub_
-defaultLoopRateHz
-initializationPeriodHz
-signalDetector_
-smaccStateMachine_
-executionModel_
-signalDetectorThread_
-signalDetector_
-updateStateClients_
-updateStateElements_
-initialized_
-end_
-scheduler_
-processorHandle_
- propagateEventToStateReactors()
- updateStatusMessage()