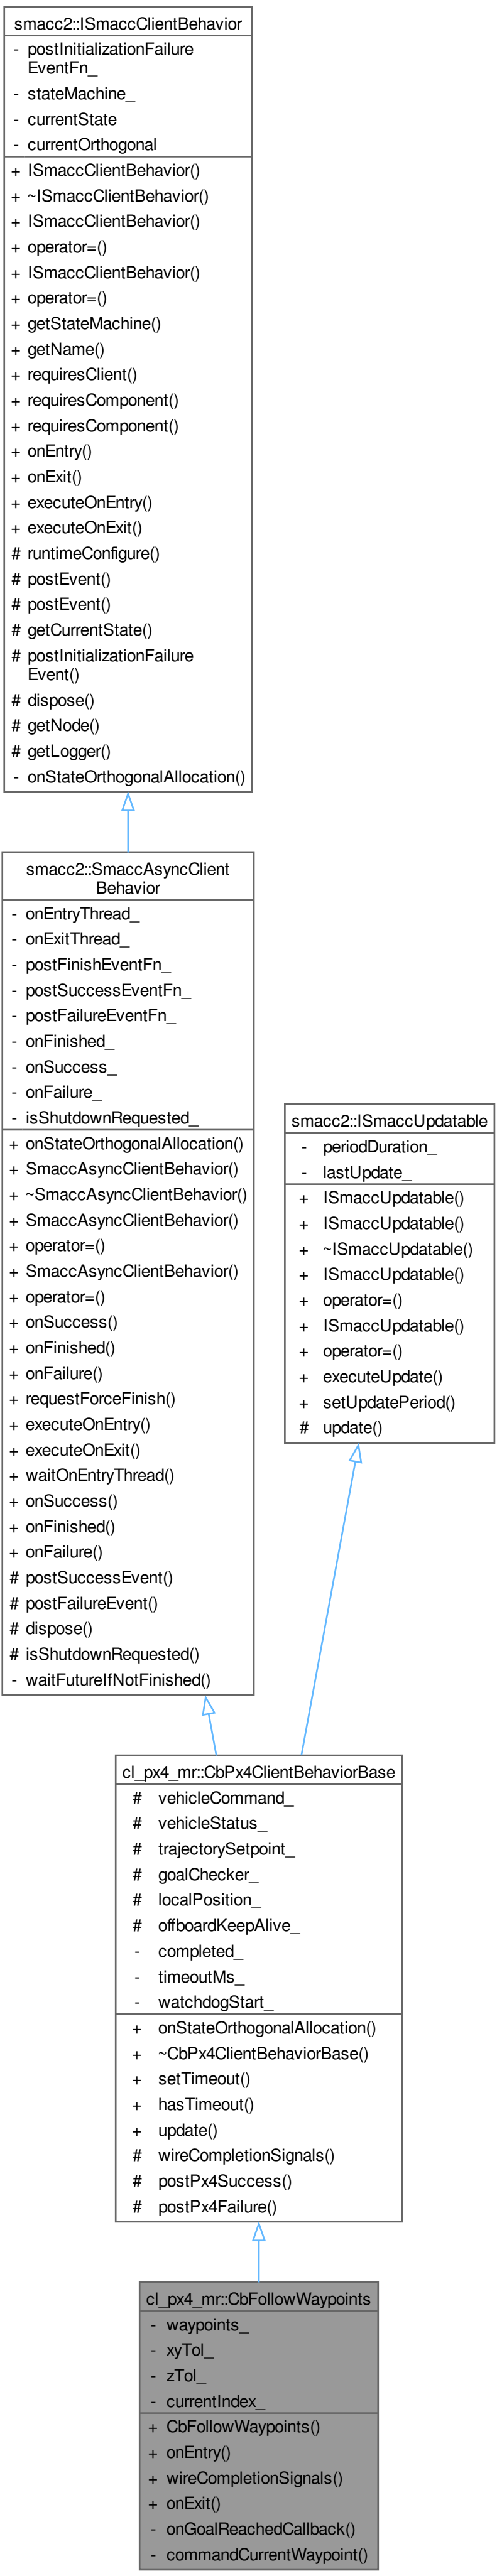
smacc2::ISmaccClientBehavior
- postInitializationFailure EventFn_
- stateMachine_
- currentState
- currentOrthogonal
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure Event()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
smacc2::SmaccAsyncClient Behavior
- onEntryThread_
- onExitThread_
- postFinishEventFn_
- postSuccessEventFn_
- postFailureEventFn_
- onFinished_
- onSuccess_
- onFailure_
- isShutdownRequested_
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::ISmaccUpdatable
- periodDuration_
- lastUpdate_
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ ISmaccUpdatable()
+ operator=()
+ ISmaccUpdatable()
+ operator=()
+ executeUpdate()
+ setUpdatePeriod()
# update()
cl_px4_mr::CbPx4ClientBehaviorBase
# vehicleCommand_
# vehicleStatus_
# trajectorySetpoint_
# goalChecker_
# localPosition_
# offboardKeepAlive_
- completed_
- timeoutMs_
- watchdogStart_
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
cl_px4_mr::CbFollowWaypoints
- waypoints_
- xyTol_
- zTol_
- currentIndex_
+ CbFollowWaypoints()
+ onEntry()
+ wireCompletionSignals()
+ onExit()
- onGoalReachedCallback()
- commandCurrentWaypoint()