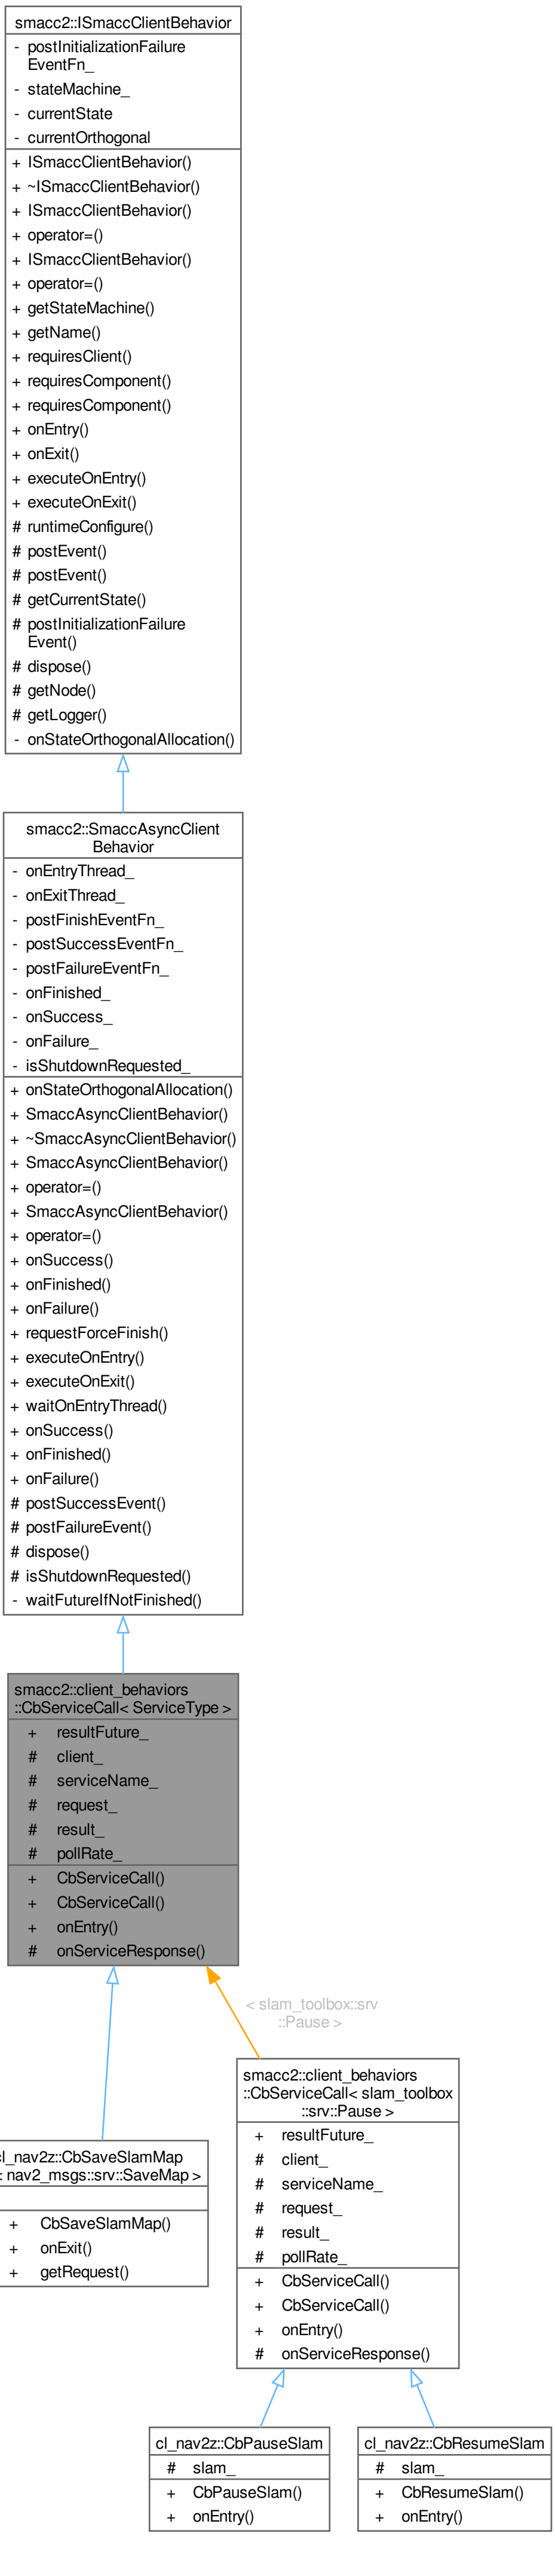
smacc2::ISmaccClientBehavior
- postInitializationFailure EventFn_
- stateMachine_
- currentState
- currentOrthogonal
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ ISmaccClientBehavior()
+ operator=()
+ ISmaccClientBehavior()
+ operator=()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# postInitializationFailure Event()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
smacc2::SmaccAsyncClient Behavior
- onEntryThread_
- onExitThread_
- postFinishEventFn_
- postSuccessEventFn_
- postFailureEventFn_
- onFinished_
- onSuccess_
- onFailure_
- isShutdownRequested_
+ onStateOrthogonalAllocation()
+ SmaccAsyncClientBehavior()
+ ~SmaccAsyncClientBehavior()
+ SmaccAsyncClientBehavior()
+ operator=()
+ SmaccAsyncClientBehavior()
+ operator=()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::client_behaviors ::CbServiceCall< ServiceType >
+ resultFuture_
# client_
# serviceName_
# request_
# result_
# pollRate_
+ CbServiceCall()
+ CbServiceCall()
+ onEntry()
# onServiceResponse()
< slam_toolbox::srv ::Pause >
cl_nav2z::CbSaveSlamMap < nav2_msgs::srv::SaveMap >
+ CbSaveSlamMap()
+ onExit()
+ getRequest()
smacc2::client_behaviors ::CbServiceCall< slam_toolbox ::srv::Pause >
+ resultFuture_
# client_
# serviceName_
# request_
# result_
# pollRate_
+ CbServiceCall()
+ CbServiceCall()
+ onEntry()
# onServiceResponse()
cl_nav2z::CbPauseSlam
slam_
+ CbPauseSlam()
+ onEntry()
cl_nav2z::CbResumeSlam
slam_
+ CbResumeSlam()
+ onEntry()