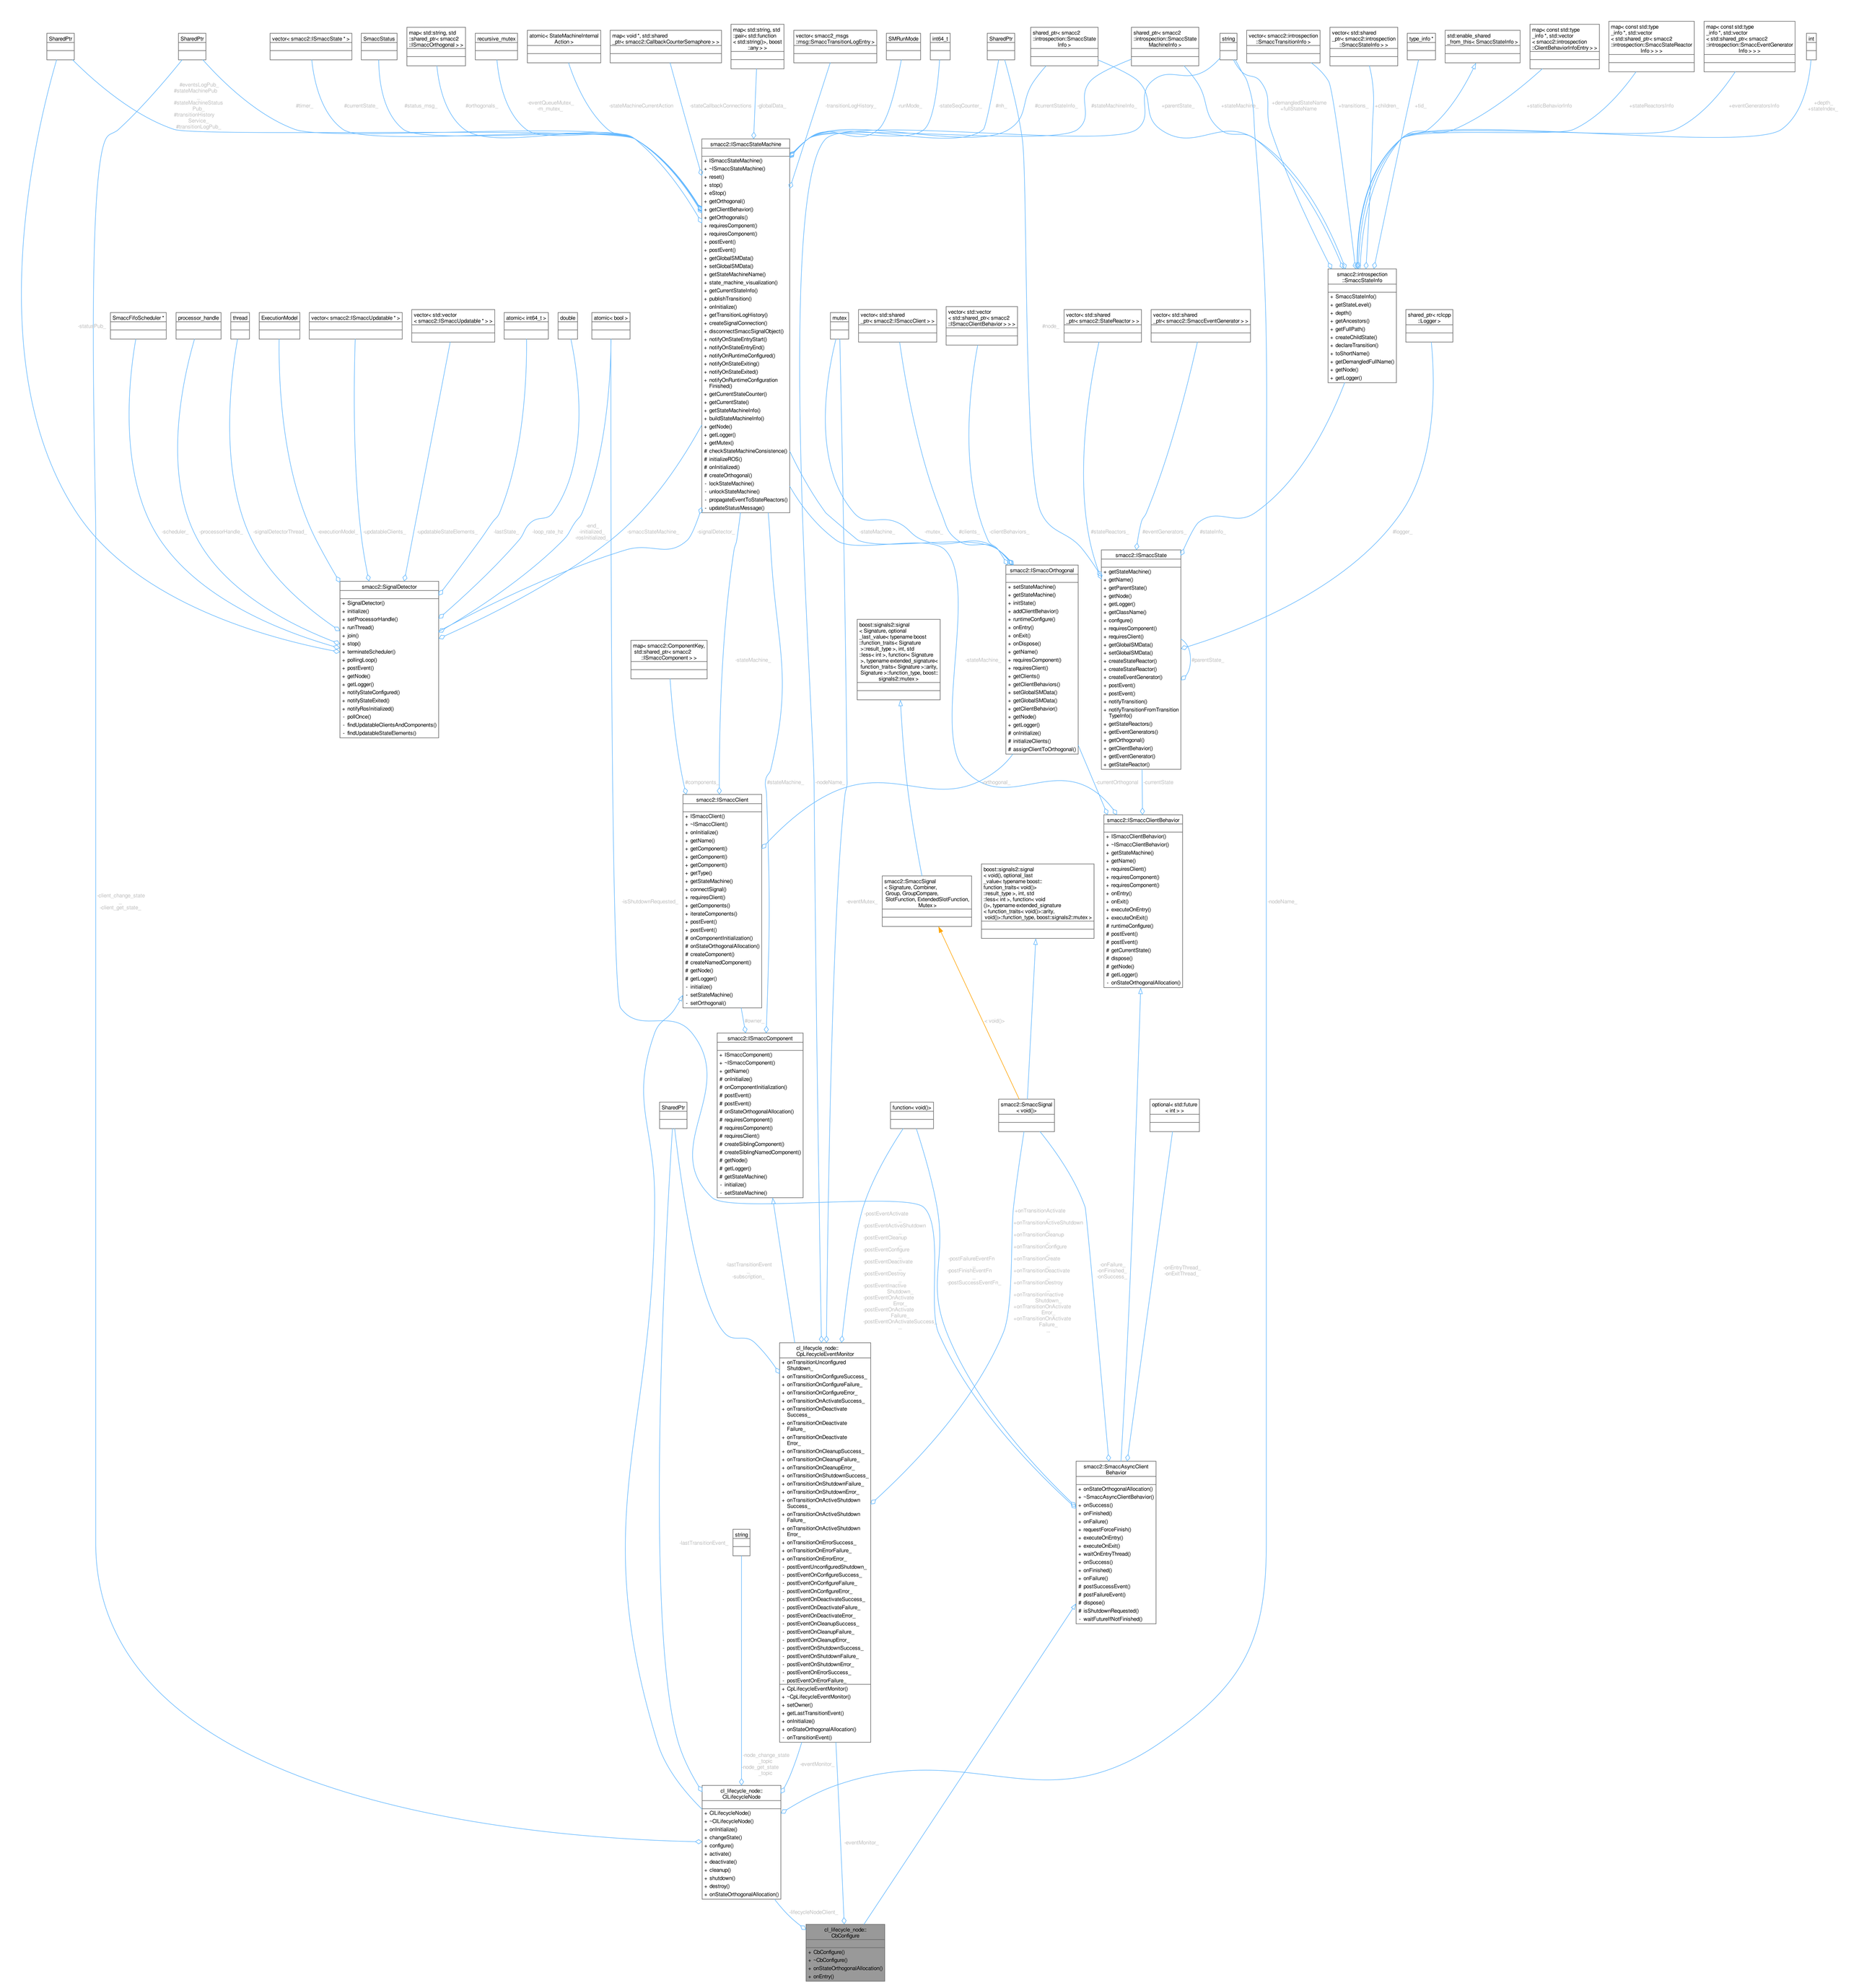
smacc2::ISmaccStateMachine
smacc2::ISmaccState
smacc2::ISmaccOrthogonal
smacc2::ISmaccClient
smacc2::ISmaccClientBehavior
smacc2::ISmaccComponent
smacc2::SignalDetector
smacc2::introspection::SmaccStateInfo
smacc2::SmaccSignal < void()>
smacc2::SmaccAsyncClientBehavior
cl_lifecycle_node::CLifecycleNode
cl_lifecycle_node::CpLifecycleEventMonitor
cl_lifecycle_node::CbConfigure
boost::signals2::signal < Signature, optional_last_value< typename boost::result_type >, int, std::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost::signals2::mutex >
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal < void(), optional_last_value< typename boost::function_traits< void()>::result_type >, int, std::less< int >, function< void()>, typename extended_signature< function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
SharedPtr
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std::shared_ptr< smacc2::ISmaccOrthogonal > >
recursive_mutex
atomic< StateMachineInternalAction >
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std::pair< std::function< std::string()>, boost::any > >
vector< smacc2_msgs::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
shared_ptr< smacc2::introspection::SmaccStateInfo >
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
string
vector< smacc2::introspection::ISmaccTransitionInfo >
vector< std::shared_ptr< smacc2::introspection::SmaccStateInfo > >
type_info *
std::enable_shared_from_this< SmaccStateInfo >
map< const std::type_info *, std::vector< smacc2::introspection::ClientBehaviorInfoEntry > >
map< const std::type_info *, std::vector< std::shared_ptr< smacc2::introspection::SmaccStateReactorInfo > > >
map< const std::type_info *, std::vector< std::shared_ptr< smacc2::introspection::SmaccEventGeneratorInfo > > >
int
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector< smacc2::ISmaccUpdatable * > >
atomic< int64_t >
double
atomic< bool >
mutex
vector< std::shared_ptr< smacc2::ISmaccClient > >
vector< std::vector< std::shared_ptr< smacc2::ISmaccClientBehavior > > >
vector< std::shared_ptr< smacc2::StateReactor > >
vector< std::shared_ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp::Logger >
map< smacc2::ComponentKey, std::shared_ptr< smacc2::ISmaccComponent > >
function< void()>
optional< std::future< int8 > >
string
cl_lifecycle_node::CpLifecycleEventMonitor
+ onTransitionUnconfigured Shutdown_
+ onTransitionOnConfigureSuccess_
+ onTransitionOnConfigureFailure_
+ onTransitionOnConfigureError_
+ onTransitionOnActivateSuccess_
+ onTransitionOnDeactivate Success_
+ onTransitionOnDeactivate Failure_
+ onTransitionOnDeactivate Error_
+ onTransitionOnCleanupSuccess_
+ onTransitionOnCleanupFailure_
+ onTransitionOnCleanupError_
+ onTransitionOnShutdownSuccess_
+ onTransitionOnShutdownFailure_
+ onTransitionOnShutdownError_
+ onTransitionOnActiveShutdown Success_
+ onTransitionOnActiveShutdown Failure_
+ onTransitionOnActiveShutdown Error_
+ onTransitionOnErrorSuccess_
+ onTransitionOnErrorFailure_
+ onTransitionOnErrorError_
- postEventUnconfiguredShutdown_
- postEventOnConfigureSuccess_
- postEventOnConfigureFailure_
- postEventOnConfigureError_
- postEventOnDeactivateSuccess_
- postEventOnDeactivateFailure_
- postEventOnDeactivateError_
- postEventOnCleanupSuccess_
- postEventOnCleanupFailure_
- postEventOnCleanupError_
- postEventOnShutdownSuccess_
- postEventOnShutdownFailure_
- postEventOnShutdownError_
- postEventOnErrorSuccess_
- postEventOnErrorFailure_
+ CpLifecycleEventMonitor()
+ ~CpLifecycleEventMonitor()
+ setOwner()
+ getLastTransitionEvent()
+ onInitialize()
+ onStateOrthogonalAllocation()
- onTransitionEvent()
cl_lifecycle_node::CLifecycleNode
+ CLifecycleNode()
+ ~CLifecycleNode()
+ onInitialize()
+ changeState()
+ configure()
+ activate()
+ deactivate()
+ cleanup()
+ shutdown()
+ destroy()
+ onStateOrthogonalAllocation()
cl_lifecycle_node::CbConfigure
+ CbConfigure()
+ ~CbConfigure()
+ onStateOrthogonalAllocation()
+ onEntry()