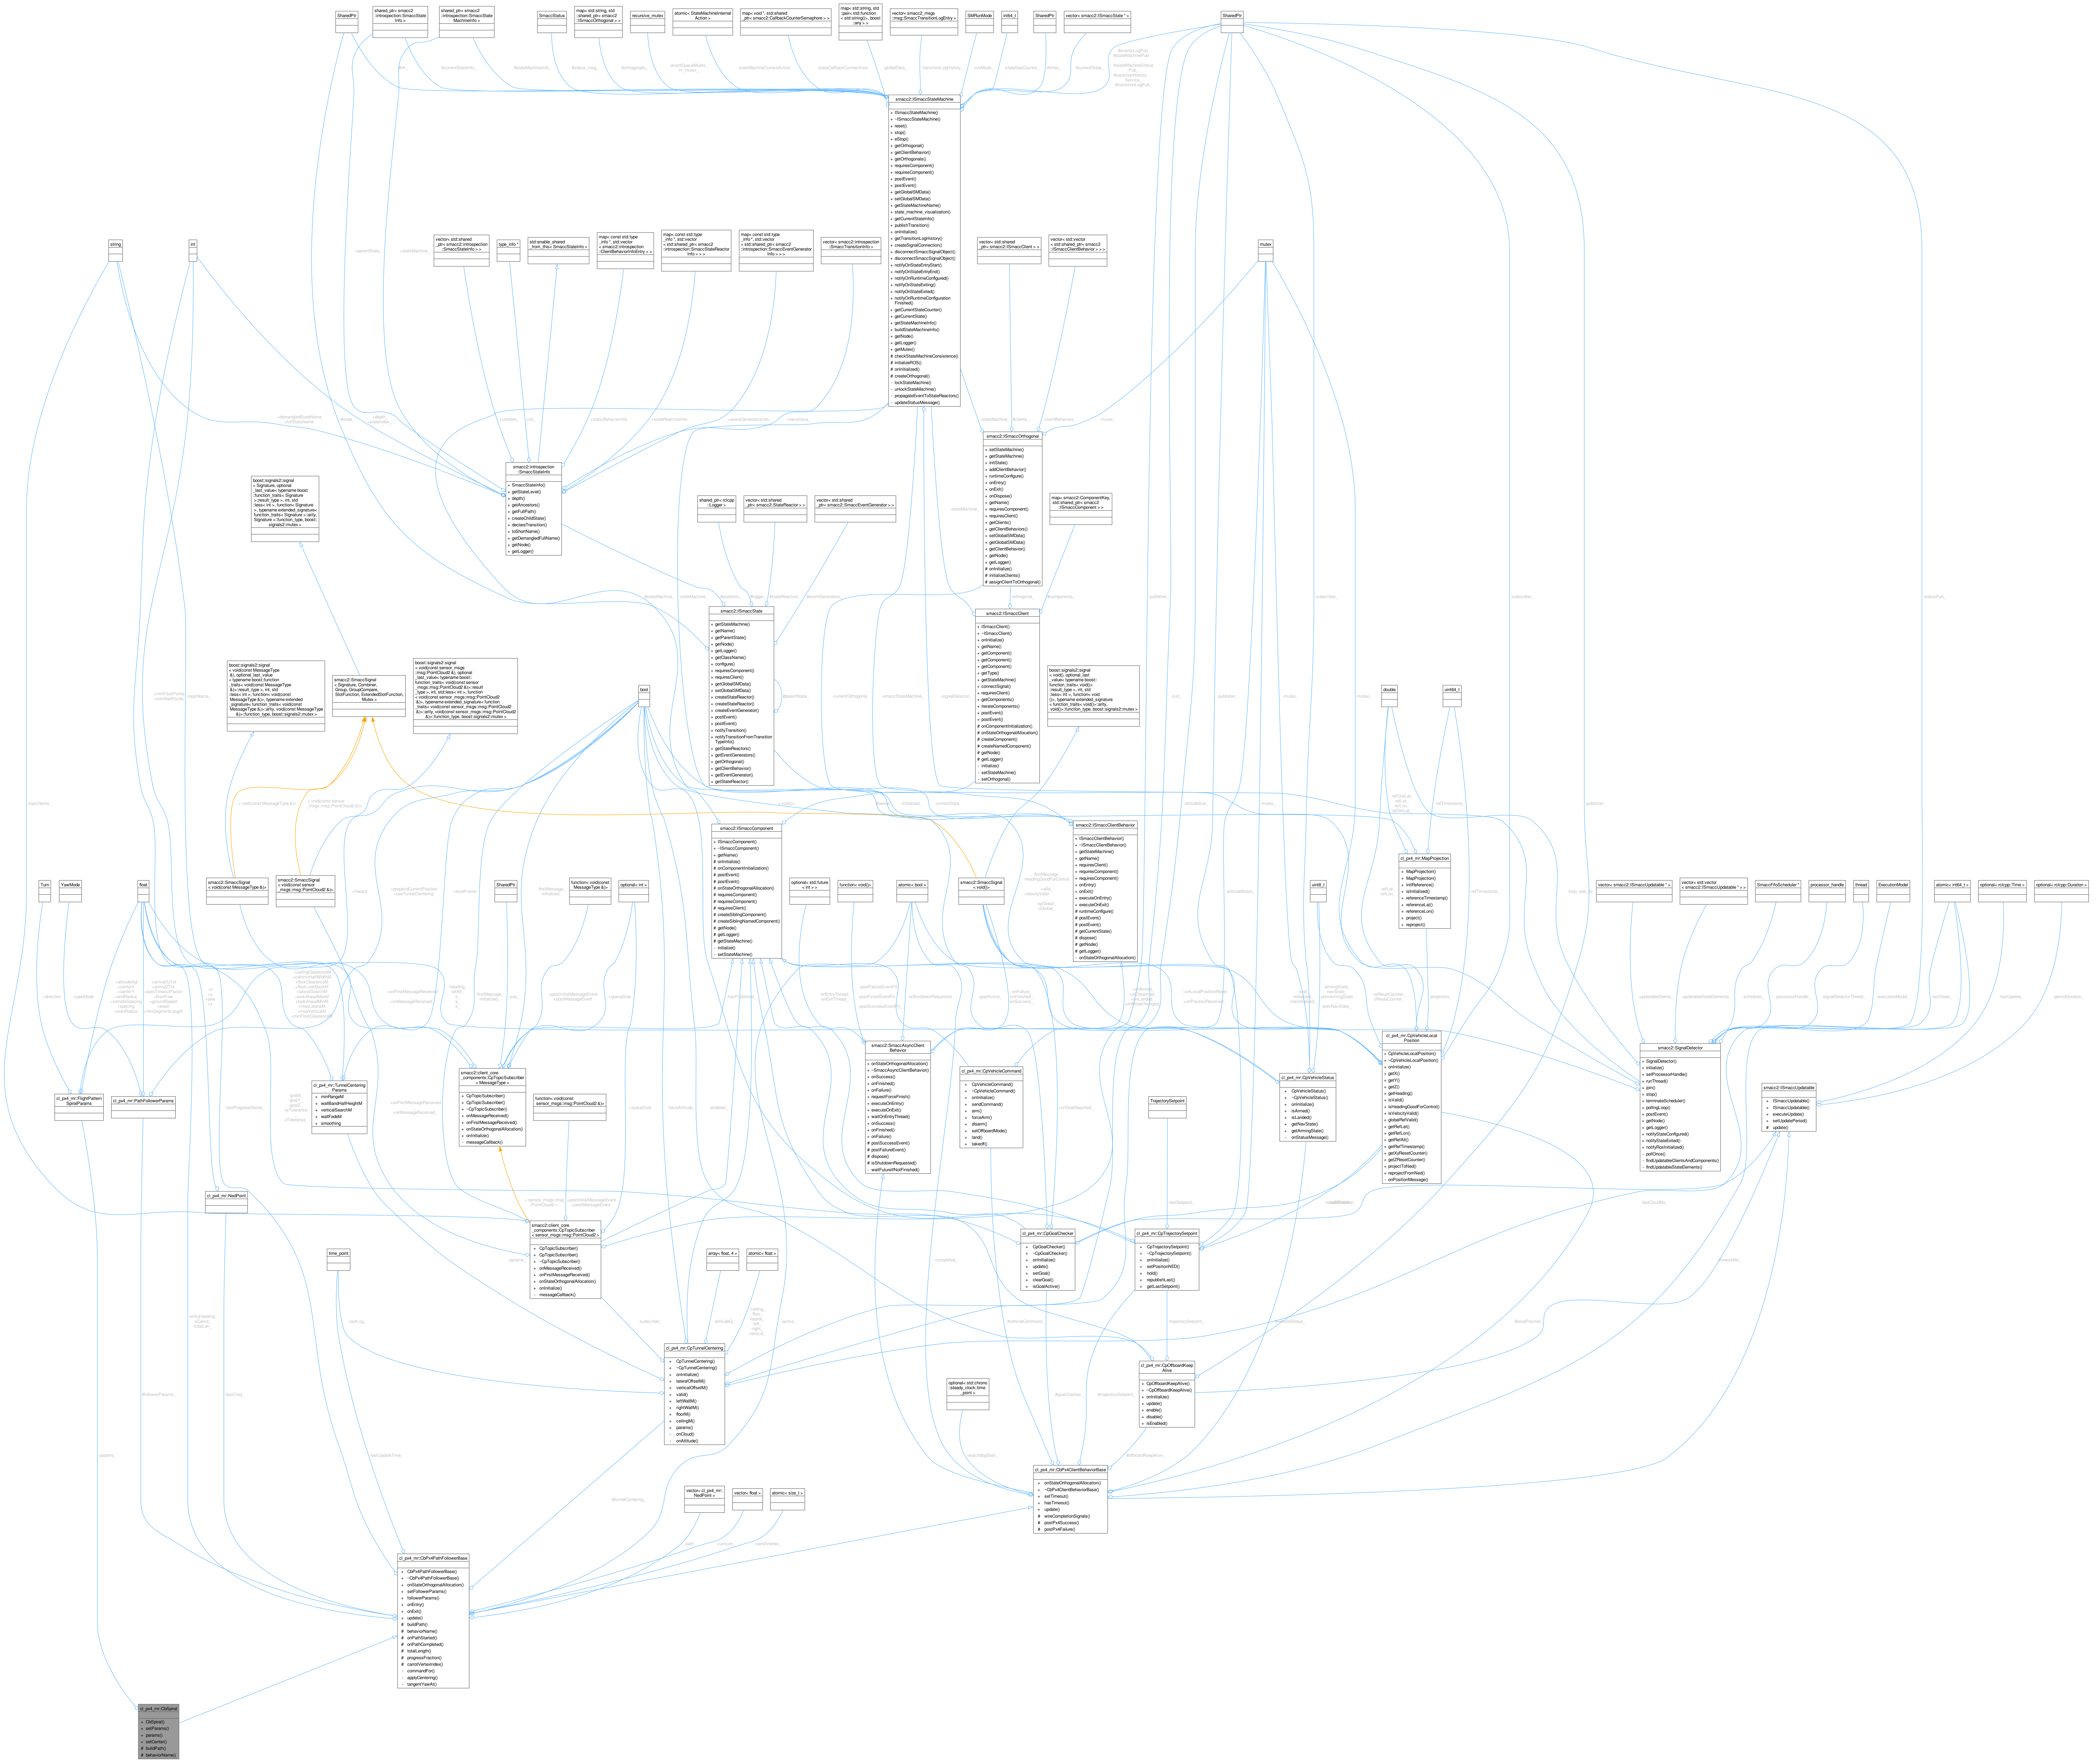
cl_px4_mr::CbSpiral
+ CbSpiral()
+ setParams()
+ params()
+ setCenter()
# buildPath()
# behaviorName()
-params_
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
-lastUpdateTime_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
map< std::string, std ::pair< std::function < std::string()>, boost ::any > >
vector< smacc2_msgs ::msg::SmaccTransitionLogEntry >
SMRunMode
-globalData_
-transitionLogHistory_
-runMode_
-stateMachine_
smacc2::introspection::SmaccStateInfo
smacc2::ISmaccOrthogonal
smacc2::ISmaccState
smacc2::ISmaccClient
smacc2::ISmaccComponent
smacc2::ISmaccClientBehavior
smacc2::SmaccSignal
smacc2::SmaccAsyncClientBehavior
smacc2::client_core_components::CpTopicSubscriber
cl_px4_mr::CpVehicleCommand
cl_px4_mr::CpVehicleStatus
cl_px4_mr::MapProjection
cl_px4_mr::CpVehicleLocal Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
-xyResetCounter_
-zResetCounter_
-projection_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
-updatableClients_
-updatableStateElements_
-scheduler_
-lastCloudNs_
-timeoutMs_
smacc2::ISmaccUpdatable
cl_px4_mr::CpGoalChecker
cl_px4_mr::CpTrajectorySetpoint
cl_px4_mr::CpOffboardKeepAlive
cl_px4_mr::CbPx4ClientBehaviorBase
cl_px4_mr::CpTunnelCentering
cl_px4_mr::TunnelCentering Params
cl_px4_mr::FlightPattern SpiralParams
cl_px4_mr::PathFollowerParams
cl_px4_mr::NedPoint
TrajectorySetpoint
string
int
bool
float
double
uint64_t
mutex
SharedPtr
time_point