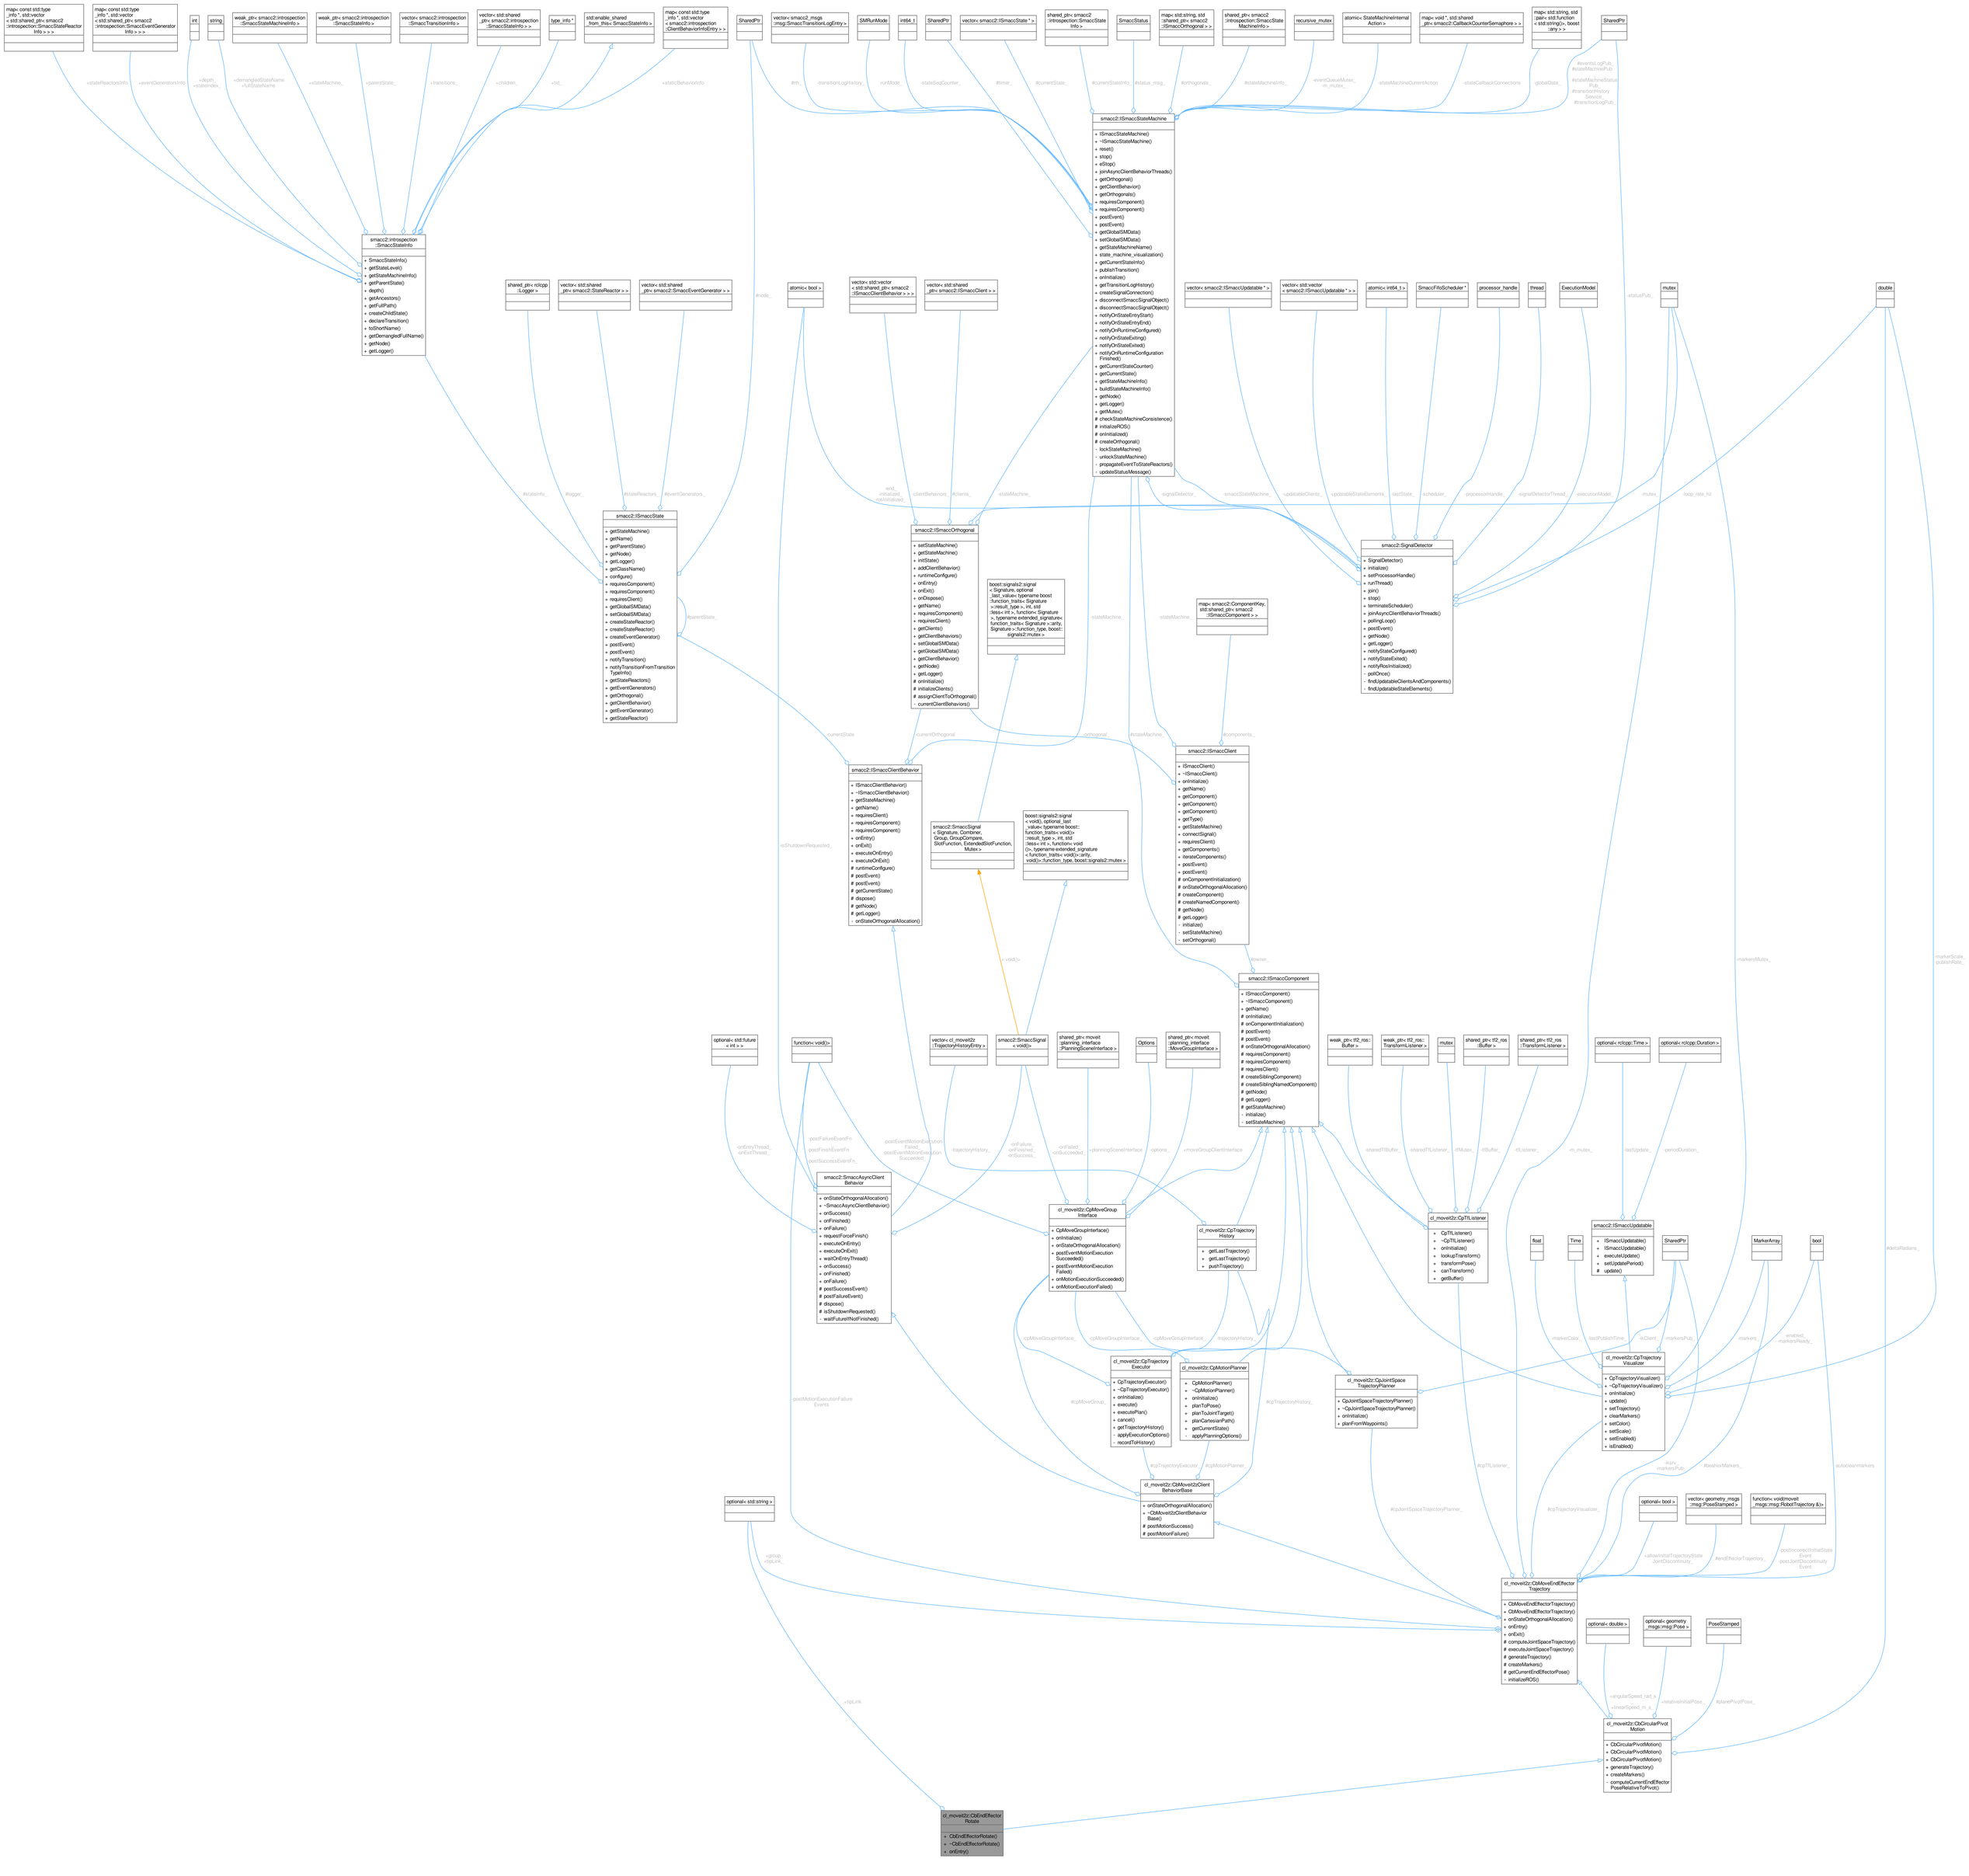
map< const std::type_info *, std::vector< std::shared_ptr< smacc2::introspection::SmaccStateReactorInfo > > >
map< const std::type_info *, std::vector< std::shared_ptr< smacc2::introspection::SmaccEventGeneratorInfo > > >
int
string
weak_ptr< smacc2::introspection::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection::SmaccStateInfo >
vector< smacc2::introspection::SmaccTransitionInfo >
vector< std::shared_ptr< smacc2::introspection::SmaccStateInfo > >
type_info *
std::enable_shared_from_this< SmaccStateInfo >
map< const std::type_info *, std::vector< smacc2::introspection::ClientBehaviorInfoEntry > >
SharedPtr
vector< smacc2_msgs::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2::introspection::SmaccStateInfo >
SmaccStatus
map< std::string, std::shared_ptr< smacc2::ISmaccOrthogonal > >
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
recursive_mutex
atomic< StateMachineInternalAction >
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std::pair< std::function< std::string()>, boost::any > >
SharedPtr
smacc2::introspection::SmaccStateInfo
smacc2::ISmaccStateMachine
shared_ptr< rclcpp::Logger >
vector< std::shared_ptr< smacc2::StateReactor > >
vector< std::shared_ptr< smacc2::SmaccEventGenerator > >
atomic< bool >
vector< std::vector< std::shared_ptr< smacc2::ISmaccClientBehavior > > >
vector< std::shared_ptr< smacc2::ISmaccClient > >
vector< smacc2::ISmaccUpdatable * >
vector< std::vector< smacc2::ISmaccUpdatable * > >
atomic< int64_t >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
mutex
double
smacc2::ISmaccState
smacc2::ISmaccOrthogonal
boost::signals2::signal< Signature, optional_last_value< typename boost::function_traits< Signature >::result_type >, int, std::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost::signals2::mutex > >
map< smacc2::ComponentKey, std::shared_ptr< smacc2::ISmaccComponent > >
smacc2::SignalDetector
smacc2::ISmaccClientBehavior
smacc2::ISmaccClient
smacc2::SmaccSignal< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal< void(), optional_last_value< typename boost::function_traits< void()>::result_type >, int, std::less< int >, function< void () >, typename extended_signature< function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
smacc2::ISmaccComponent
optional< std::future< int > >
function< void()>
vector< cl_moveit2z::TrajectoryHistoryEntry >
smacc2::SmaccSignal< void()>
shared_ptr< moveit::planning_interface::PlanningSceneInterface >
Options
shared_ptr< moveit::planning_interface::MoveGroupInterface >
weak_ptr< tf2_ros::Buffer >
weak_ptr< tf2_ros::TransformListener >
mutex
shared_ptr< tf2_ros::Buffer >
shared_ptr< tf2_ros::TransformListener >
optional< rclcpp::Time >
optional< rclcpp::Duration >
smacc2::SmaccAsyncClientBehavior
cl_moveit2z::CpMoveGroupInterface
cl_moveit2z::CpTrajectoryHistory
cl_moveit2z::CpTIListener
smacc2::ISmaccUpdatable
float
Time
SharedPtr
MarkerArray
bool
cl_moveit2z::CpTrajectoryExecutor
cl_moveit2z::CpMotionPlanner
cl_moveit2z::CpJointSpaceTrajectoryPlanner
cl_moveit2z::CpTrajectoryVisualizer
optional< std::string >
cl_moveit2z::CbMoveit2zClientBehaviorBase
optional< bool >
vector< geometry_msgs::msg::PoseStamped >
function< void(moveit_msgs::msg::RobotTrajectory &)>
cl_moveit2z::CbMoveEndEffectorTrajectory
optional< double >
optional< geometry_msgs::msg::Pose >
PoseStamped
cl_moveit2z::CbCircularPivotMotion
cl_moveit2z::CbEndEffectorRotate
+stateReactorsInfo_
+eventGeneratorsInfo_
+depth_
+stateIndex_
-demangledStateName
+fullStateName
+stateMachine_
+parentState_
+transitions_
+children_
+id_
+staticBehaviorInfo
#info_
-transitionLogHistory_
-runMode_
-stateSeqCounter_
#timer_
#currentState_
#currentStateInfo_
#status_msg_
#orthogonals_
#stateMachineInfo_
-eventQueueMutex_
-m_mutex_
-stateMachineCurrentAction
-stateCallbackConnections
-globalData_
#eventsLogPub_
#stateMachinePub_
#stateMachineStatusPub_
#transitionHistoryService_
#transitionLogPub_
-statusPub_
#stateInfo_
#logger_
#stateReactors_
#eventGenerators_
#node_
-and_initialized_
-isInitialized_
-clientBehaviors_
#clients_
-stateMachine_
-signalDetector_
-smaccStateMachine_
-updatableClients_
-updatableStateElements_
-lastState_
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionModel_
-mutex_
-loop_rate_hz
#currentState_
-currentOrthogonal_
-orthogonal_
#components_
#owner_
#isShutdownRequested_
-markersMutex_
-markerScale
-publishRate_
-onEntryThread_
-onExitThread_
-postFailureEventFn
-postFinishEventFn
-postSuccessEventFn_
-postEventMotionExecutionFailed_
-postEventMotionExecutionSucceeded_
-trajectoryHistory_
-onFailure_
-onFinished_
-onSuccess_
-onFailed_
-onSucceeded_
+planningSceneInterface
-options_
+moveGroupClientInterface
-sharedTfBuffer_
-sharedTfListener_
-tfMutex_
-tfBuffer_
-tfListener_
-m_mutex_
-lastUpdate_
-periodDuration_
-markerColor_
-lastPublishTime_
-ikClient_
-markersPub_
-markers_
-enabled_
-markersReady_
-cpMoveGroupInterface_
-cpMoveGroupInterface_
-cpMoveGroupInterface_
-trajectoryHistory_
#cpMoveGroup_
#cpTrajectoryExecutor_
#cpMotionPlanner_
#cpTrajectoryHistory_
#cpTIListener_
#cpJointSpaceTrajectoryPlanner_
#cpTrajectoryVisualizer_
-postMotionExecutionFailureEvents
-ikSrv_
-markersPub_
#beaconMarkers_
-autocleanmarkers
-group_
-ikLink_
+ikLink
-allowInitialTrajectoryStateJointDiscontinuity_
#endEffectorTrajectory_
-postIncorrectInitialStateEvent
-postJointDiscontinuityEvent
-angularSpeed_rad_s
-linearSpeed_m_s
+relativeInitialPose_
#planePivotPose_
-deltaRadians_