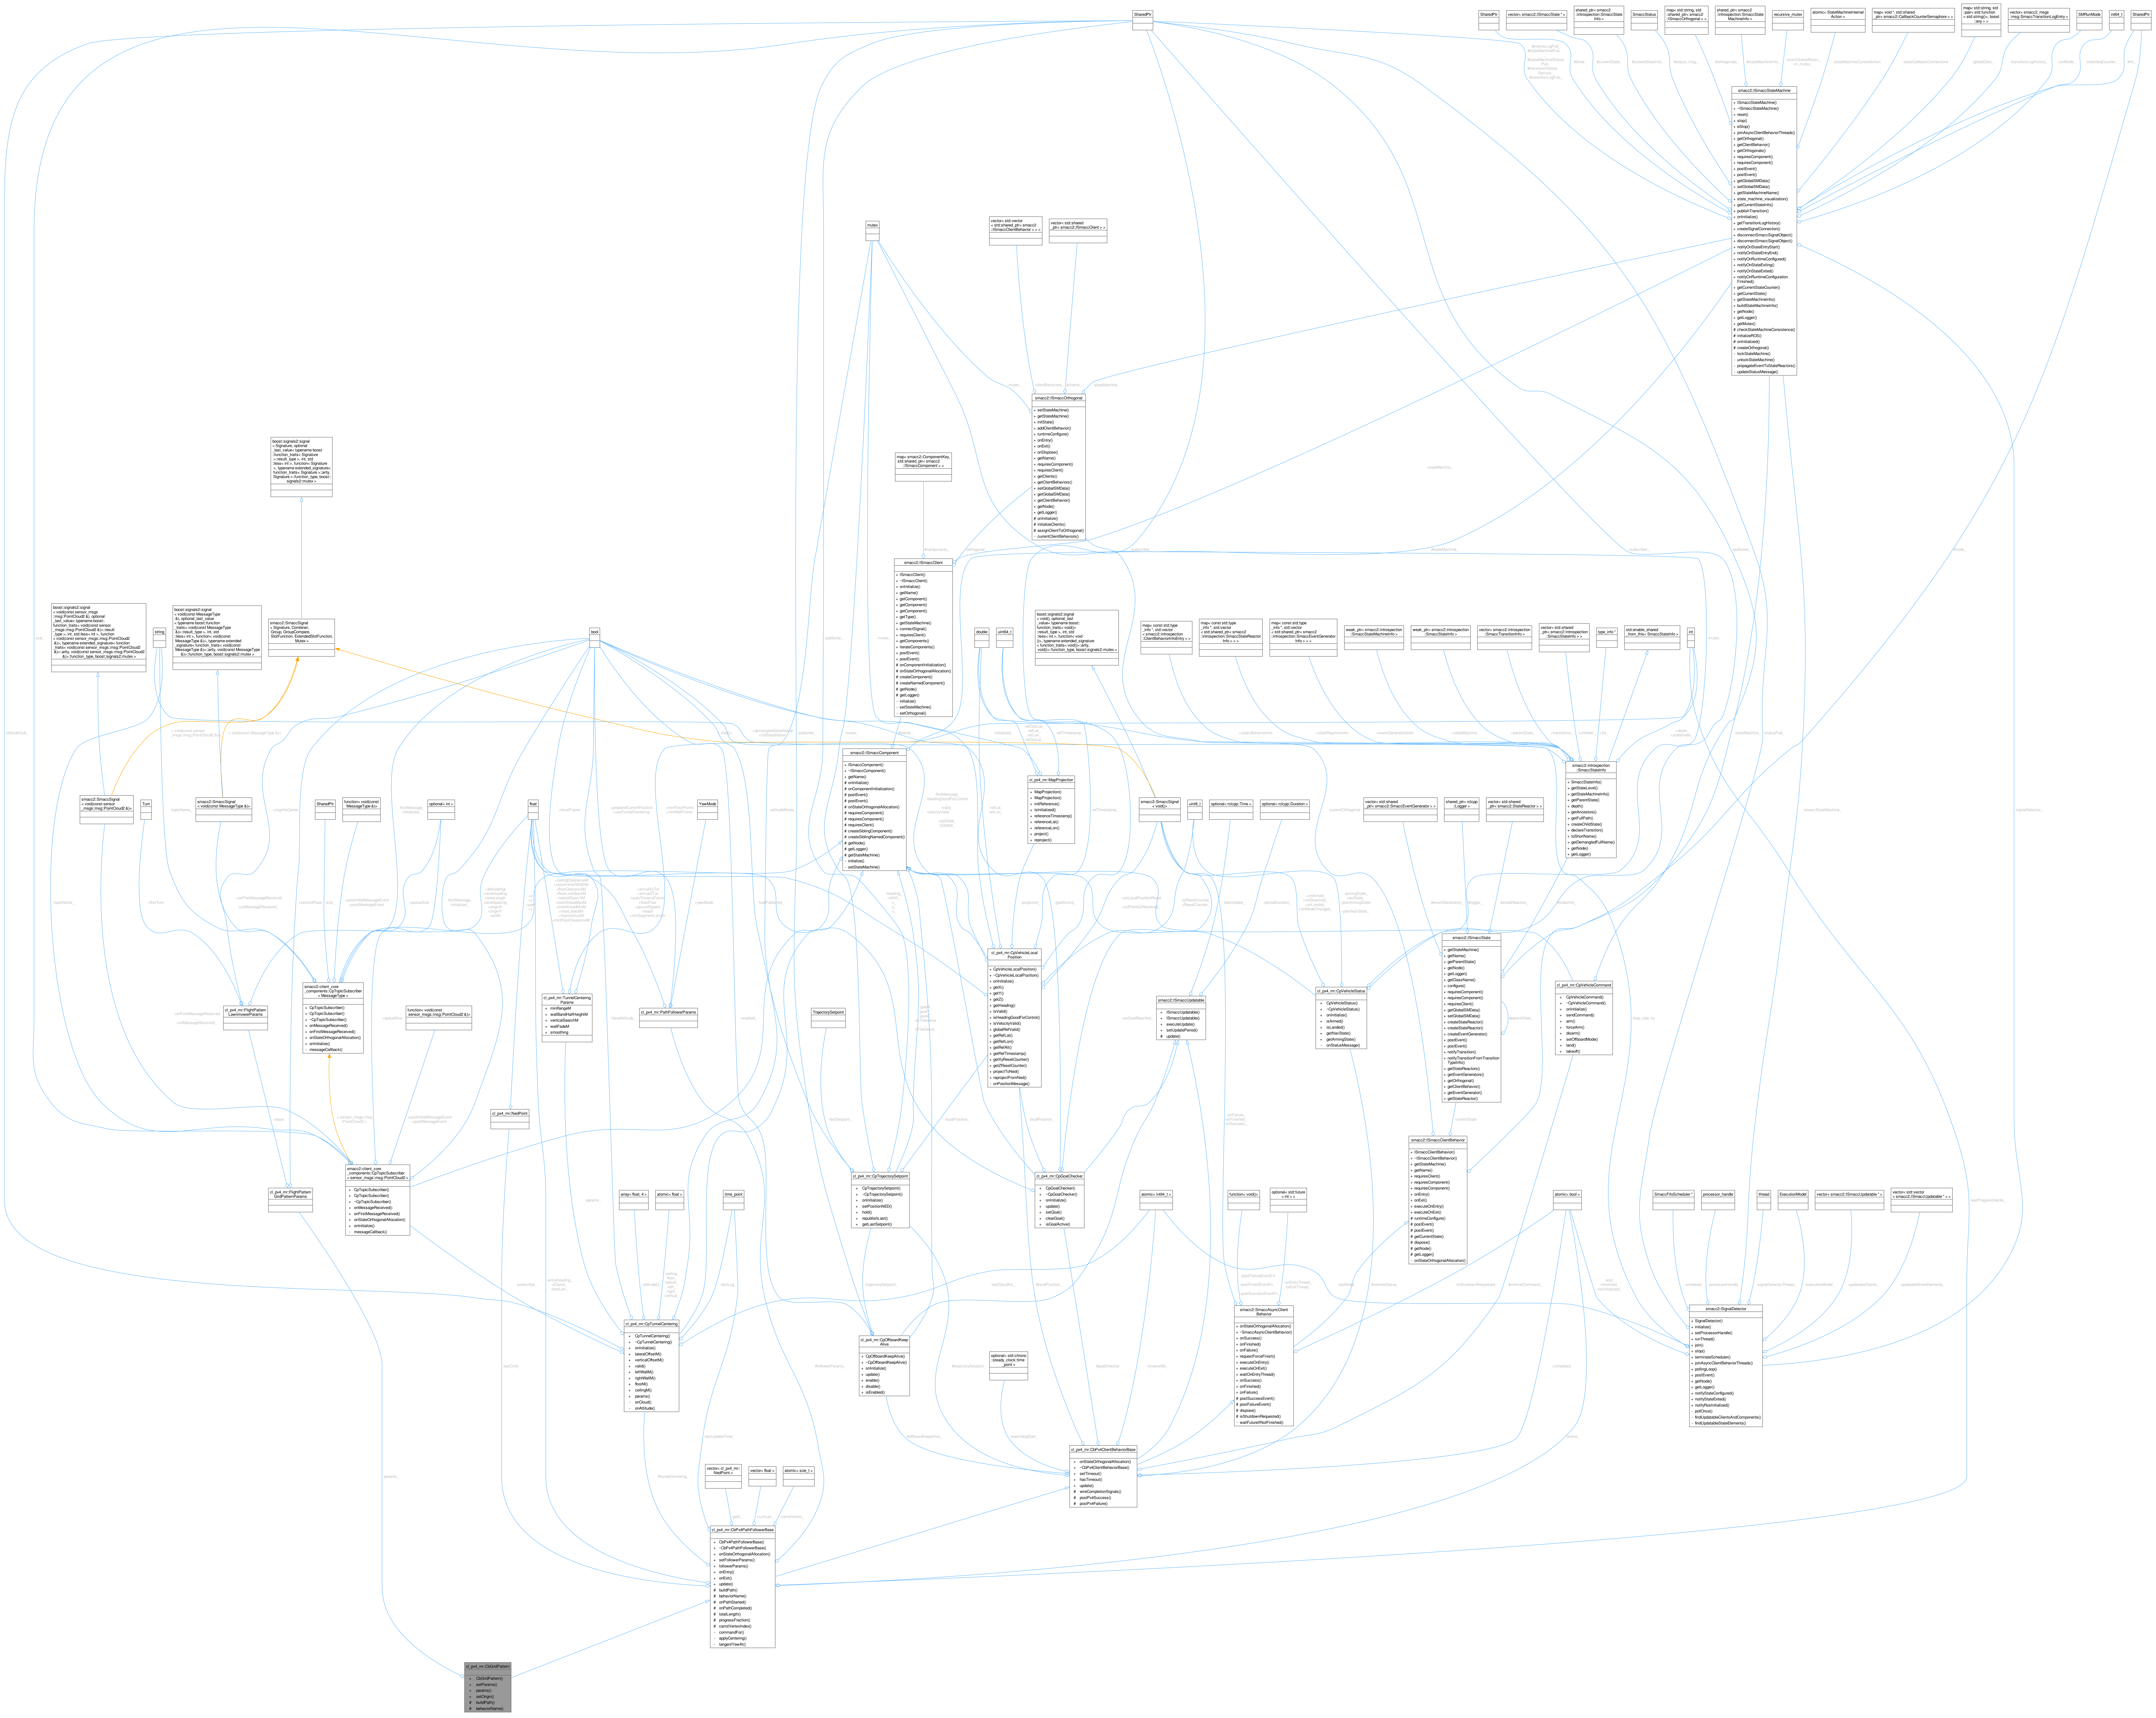
cl_px4_mr::CbGridPattern
+ CbGridPattern()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
-lastUpdateTime_
#tunnelCentering_
#followerParams_
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#goalChecker_
-timeoutMs_
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
-attitudeQ_
-ceiling_
-floor_
-lateral_
-left_
-right_
-vertical_
-lastLog_
cl_px4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
-trajectorySetpoint_
#offboardKeepAlive_
#trajectorySetpoint_
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
cl_px4_mr::MapProjection
+ MapProjection()
+ MapProjection()
+ initReference()
+ isInitialized()
+ referenceTimestamp()
+ referenceLat()
+ referenceLon()
+ project()
+ reproject()
cl_px4_mr::CpVehicleLocalPosition
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
TrajectorySetpoint
cl_px4_mr::CpTrajectorySetpoint
cl_px4_mr::CpGoalChecker
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
cl_px4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransitionTypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
atomic< int64_t >
function< void()>
optional< std::future < int > >
atomic< bool >
smacc2::SmaccAsyncClientBehavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfigurationFinished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
recursive_mutex
#orthogonals_
#stateMachineInfo_
-eventQueueMutex_
-m_mutex_
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
mutex
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
vector< std::shared_ptr< smacc2::ISmaccClient > >
-mutex_
-clientBehaviors_
#clients_
-stateMachine_
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
#components_
-orthogonal_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
#owner_
double
uint64_t
boost::signals2::signal < void(), optional_last _value< typename boost:: function_traits< void()> ::result_type >, int, std ::less< int >, function< void ()>, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
boost::signals2::signal < void(const sensor_msgs ::msg::PointCloud2 &), optional _last_value< typename boost:: function_traits< void(const sensor _msgs::msg::PointCloud2 &)>::result _type >, int, std::less< int >, function < void(const sensor_msgs::msg::PointCloud2 &)>, typename extended_signature< function _traits< void(const sensor_msgs::msg::PointCloud2 &)>::arity, void(const sensor_msgs::msg::PointCloud2 &)>::function_type, boost::signals2::mutex >
string
boost::signals2::signal < void(const MessageType &), optional_last_value < typename boost::function _traits< void(const MessageType &)>::result_type >, int, std ::less< int >, function< void(const MessageType &)>, typename extended _signature< function_traits< void(const MessageType &)>::arity, void(const MessageType &)>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
smacc2::SmaccSignal < void(const sensor _msgs::msg::PointCloud2 &)>
Turn
smacc2::SmaccSignal < void(const MessageType &)>
SharedPtr
function< void(const MessageType &)>
optional< int >
float
cl_px4_mr::FlightPattern LawnmowerParams
smacc2::client_core _components::CpTopicSubscriber < MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
function< void(const sensor_msgs::msg::PointCloud2 &)>
cl_px4_mr::TunnelCentering Params
+ minRangeM
+ wallBandHalfHeightM
+ verticalSearchM
+ wallFadeM
+ smoothing
cl_px4_mr::NedPoint
cl_px4_mr::FlightPattern GridPatternParams
smacc2::client_core _components::CpTopicSubscriber < sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()