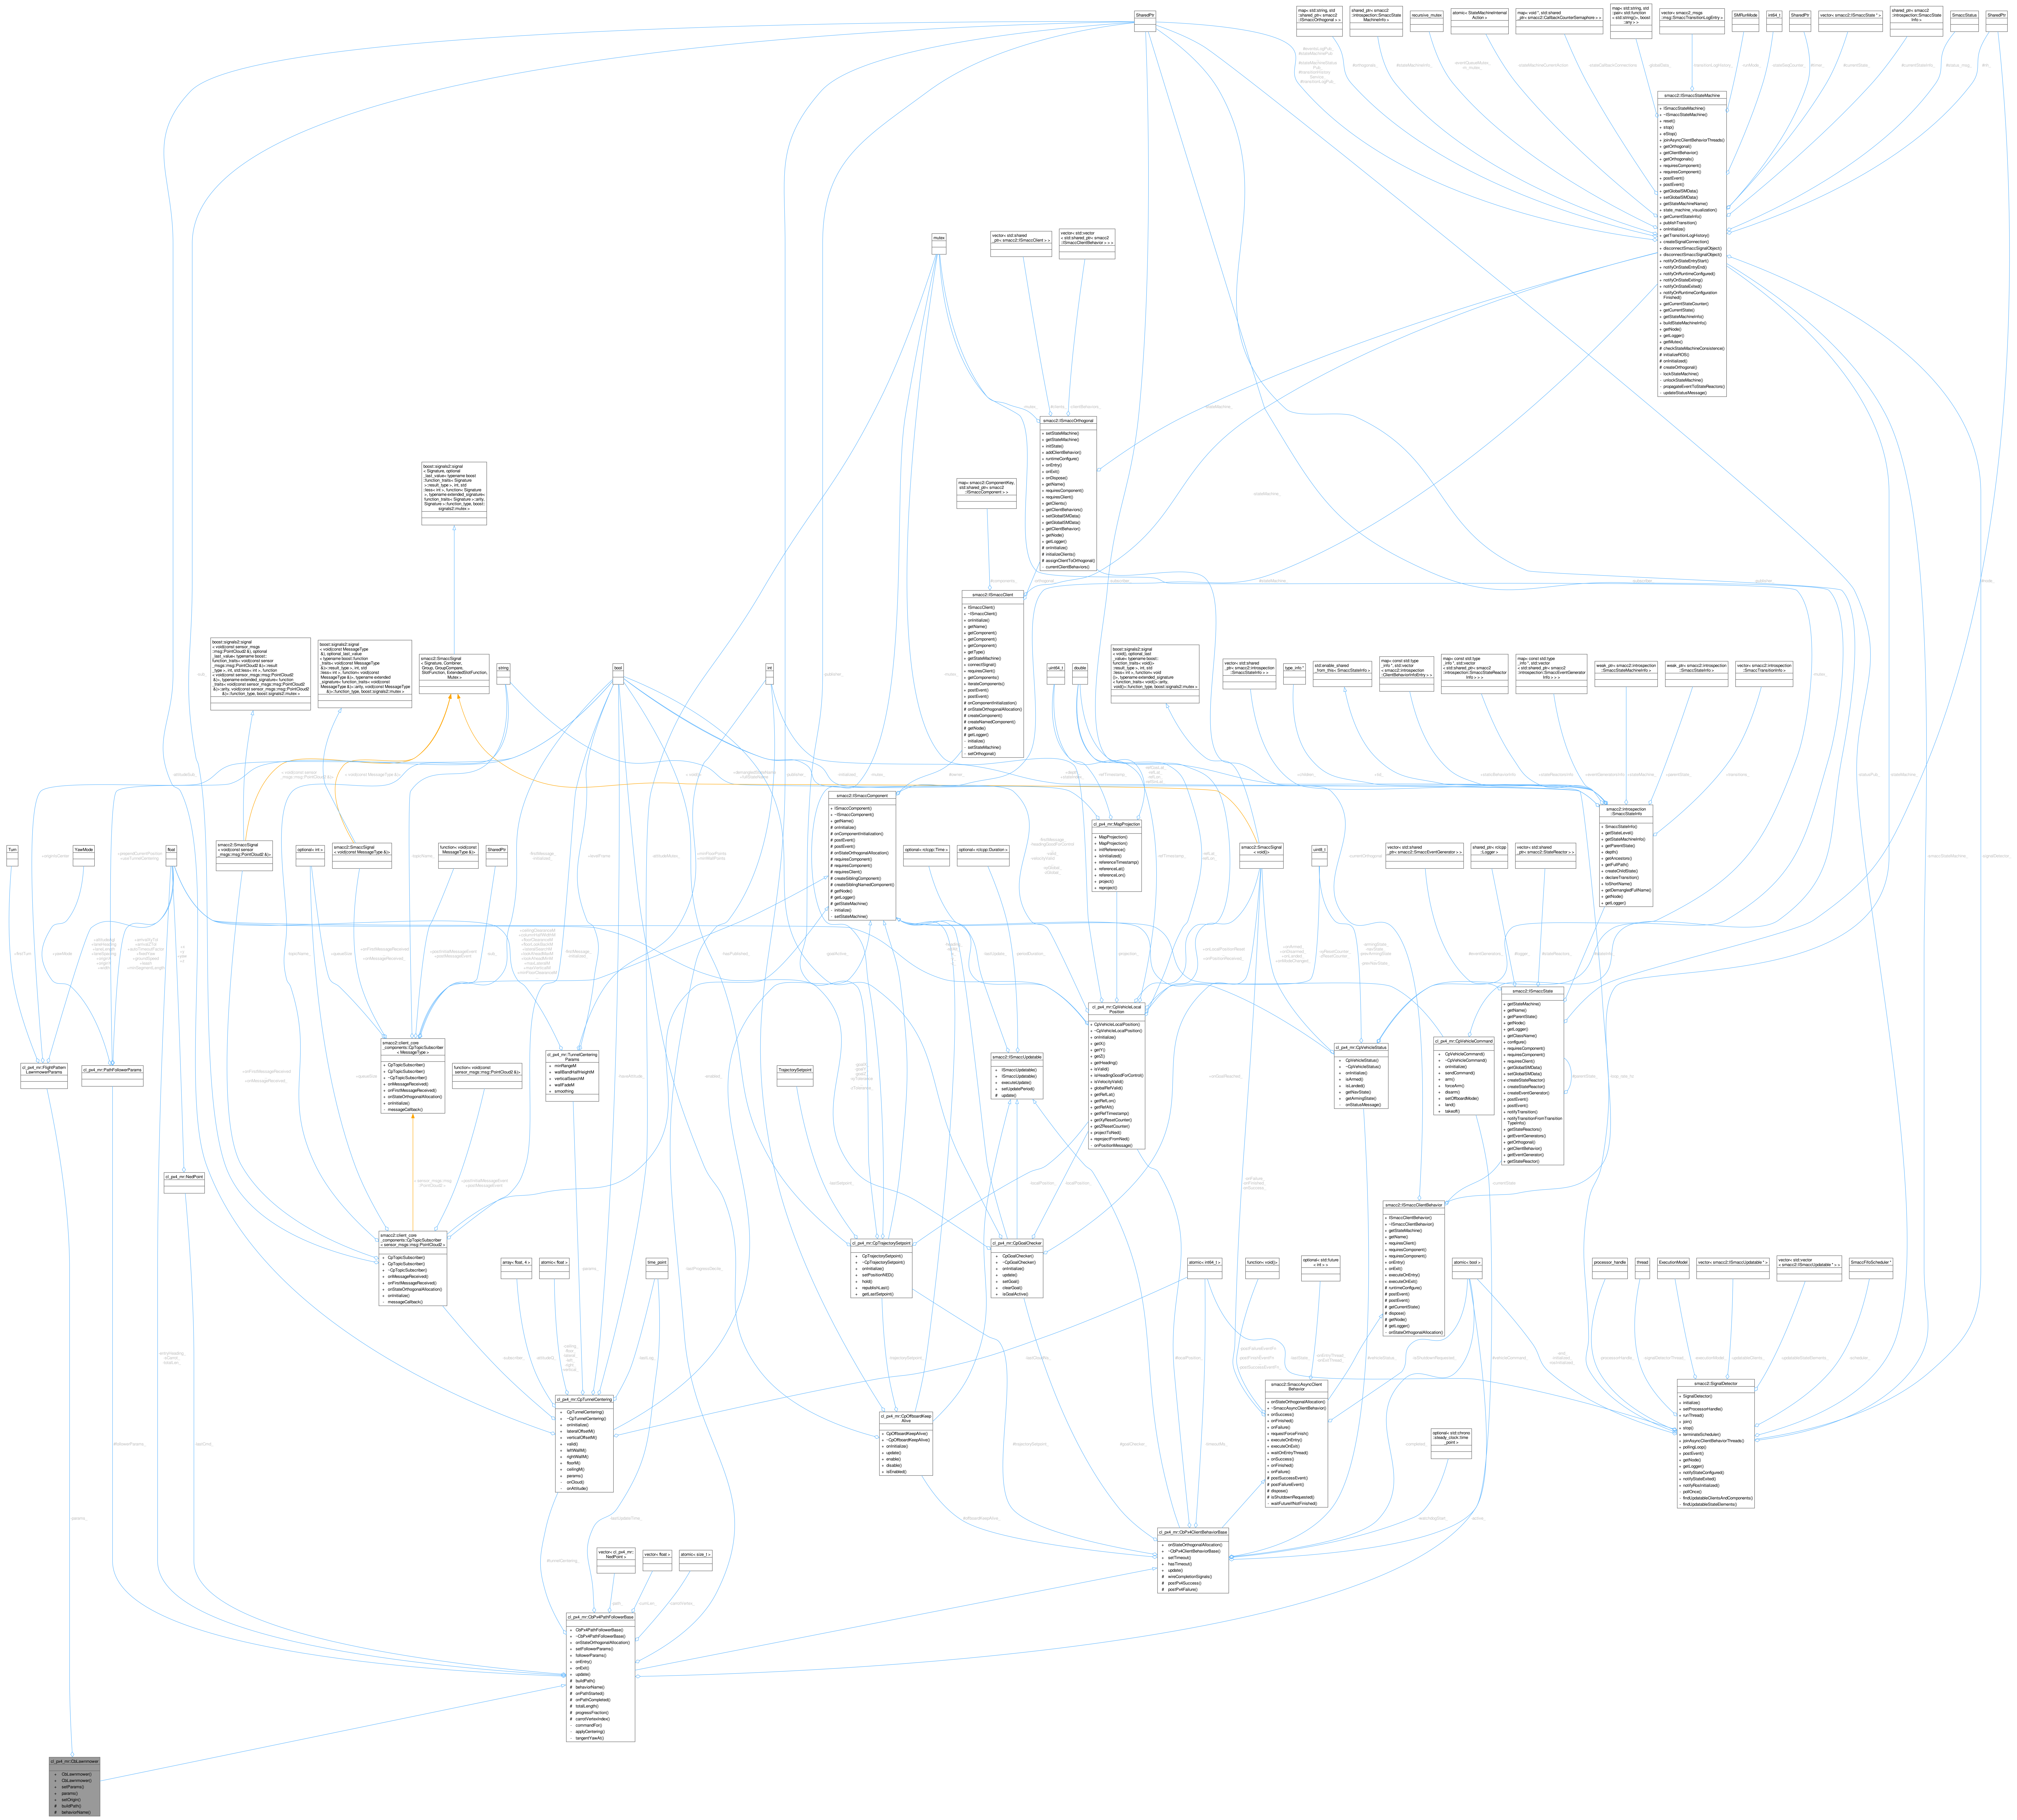
cl_px4_mr::CbLawnmower
+ CbLawnmower()
+ CbLawnmower()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()
-params_
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
#followerParams_
-entryHeading_
-sCarrot_
-totalLen_
-lastCmd_
#tunnelCentering_
-lastUpdateTime_
-path_
-cumLen_
-carrotVertex_
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#goalChecker_
#localPosition_
-timeoutMs_
-watchdogStart_
-active_
-completed_
optional< std::chrono::steady_clock::time_point >
smacc2::SmaccAsyncClientBehavior
smacc2::SignalDetector
cl_px4_mr::CpTunnelCentering
cl_px4_mr::TunnelCenteringParams
cl_px4_mr::FlightPatternLawnmowerParams
cl_px4_mr::PathFollowerParams
cl_px4_mr::NedPoint
Turn
YawMode
float
string
bool
int
uint64_t
double
uint8_t
mutex
SharedPtr
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
smacc2::SmaccSignal< void(const MessageType &)>
smacc2::SmaccSignal< void()>
smacc2::client_core_components::CpTopicSubscriber< MessageType >
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
optional< int >
function< void(const MessageType &)>
function< void(const sensor_msgs::msg::PointCloud2 &)>
array< float, 4 >
atomic< float >
time_point
TrajectorySetpoint
smacc2::ISmaccComponent
smacc2::ISmaccClient
smacc2::ISmaccOrthogonal
smacc2::ISmaccUpdatable
smacc2::ISmaccState
smacc2::ISmaccClientBehavior
smacc2::ISmaccStateMachine
smacc2::introspection::SmaccStateInfo
cl_px4_mr::MapProjection
cl_px4_mr::CpVehicleLocalPosition
cl_px4_mr::CpVehicleStatus
cl_px4_mr::CpVehicleCommand
cl_px4_mr::CpTrajectorySetpoint
cl_px4_mr::CpGoalChecker
cl_px4_mr::CpOffboardKeepAlive
optional< rclcpp::Time >
optional< rclcpp::Duration >
atomic< int64_t >
function< void()>
optional< std::future< int > >
atomic< bool >
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector< smacc2::ISmaccUpdatable * > >
SmaccFifoScheduler *
vector< std::shared_ptr< smacc2::ISmaccClient > >
vector< std::vector< std::shared_ptr< smacc2::ISmaccClientBehavior > > >
map< smacc2::ComponentKey, std::shared_ptr< smacc2::ISmaccComponent > >
vector< std::shared_ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp::Logger >
vector< std::shared_ptr< smacc2::StateReactor > >
vector< std::shared_ptr< smacc2::introspection::SmaccStateInfo > >
type_info *
std::enable_shared_from_this< SmaccStateInfo >
weak_ptr< smacc2::introspection::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection::SmaccStateInfo >
vector< smacc2::introspection::SmaccTransitionInfo >
map< std::string, std::shared_ptr< smacc2::ISmaccOrthogonal > >
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
recursive_mutex
atomic< StateMachineInternalAction >
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std::pair< std::function< std::string()>, boost::any > >
vector< smacc2_msgs::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
vector< smacc2::ISmaccState * >
shared_ptr< smacc2::introspection::SmaccStateInfo >
SmaccStatus