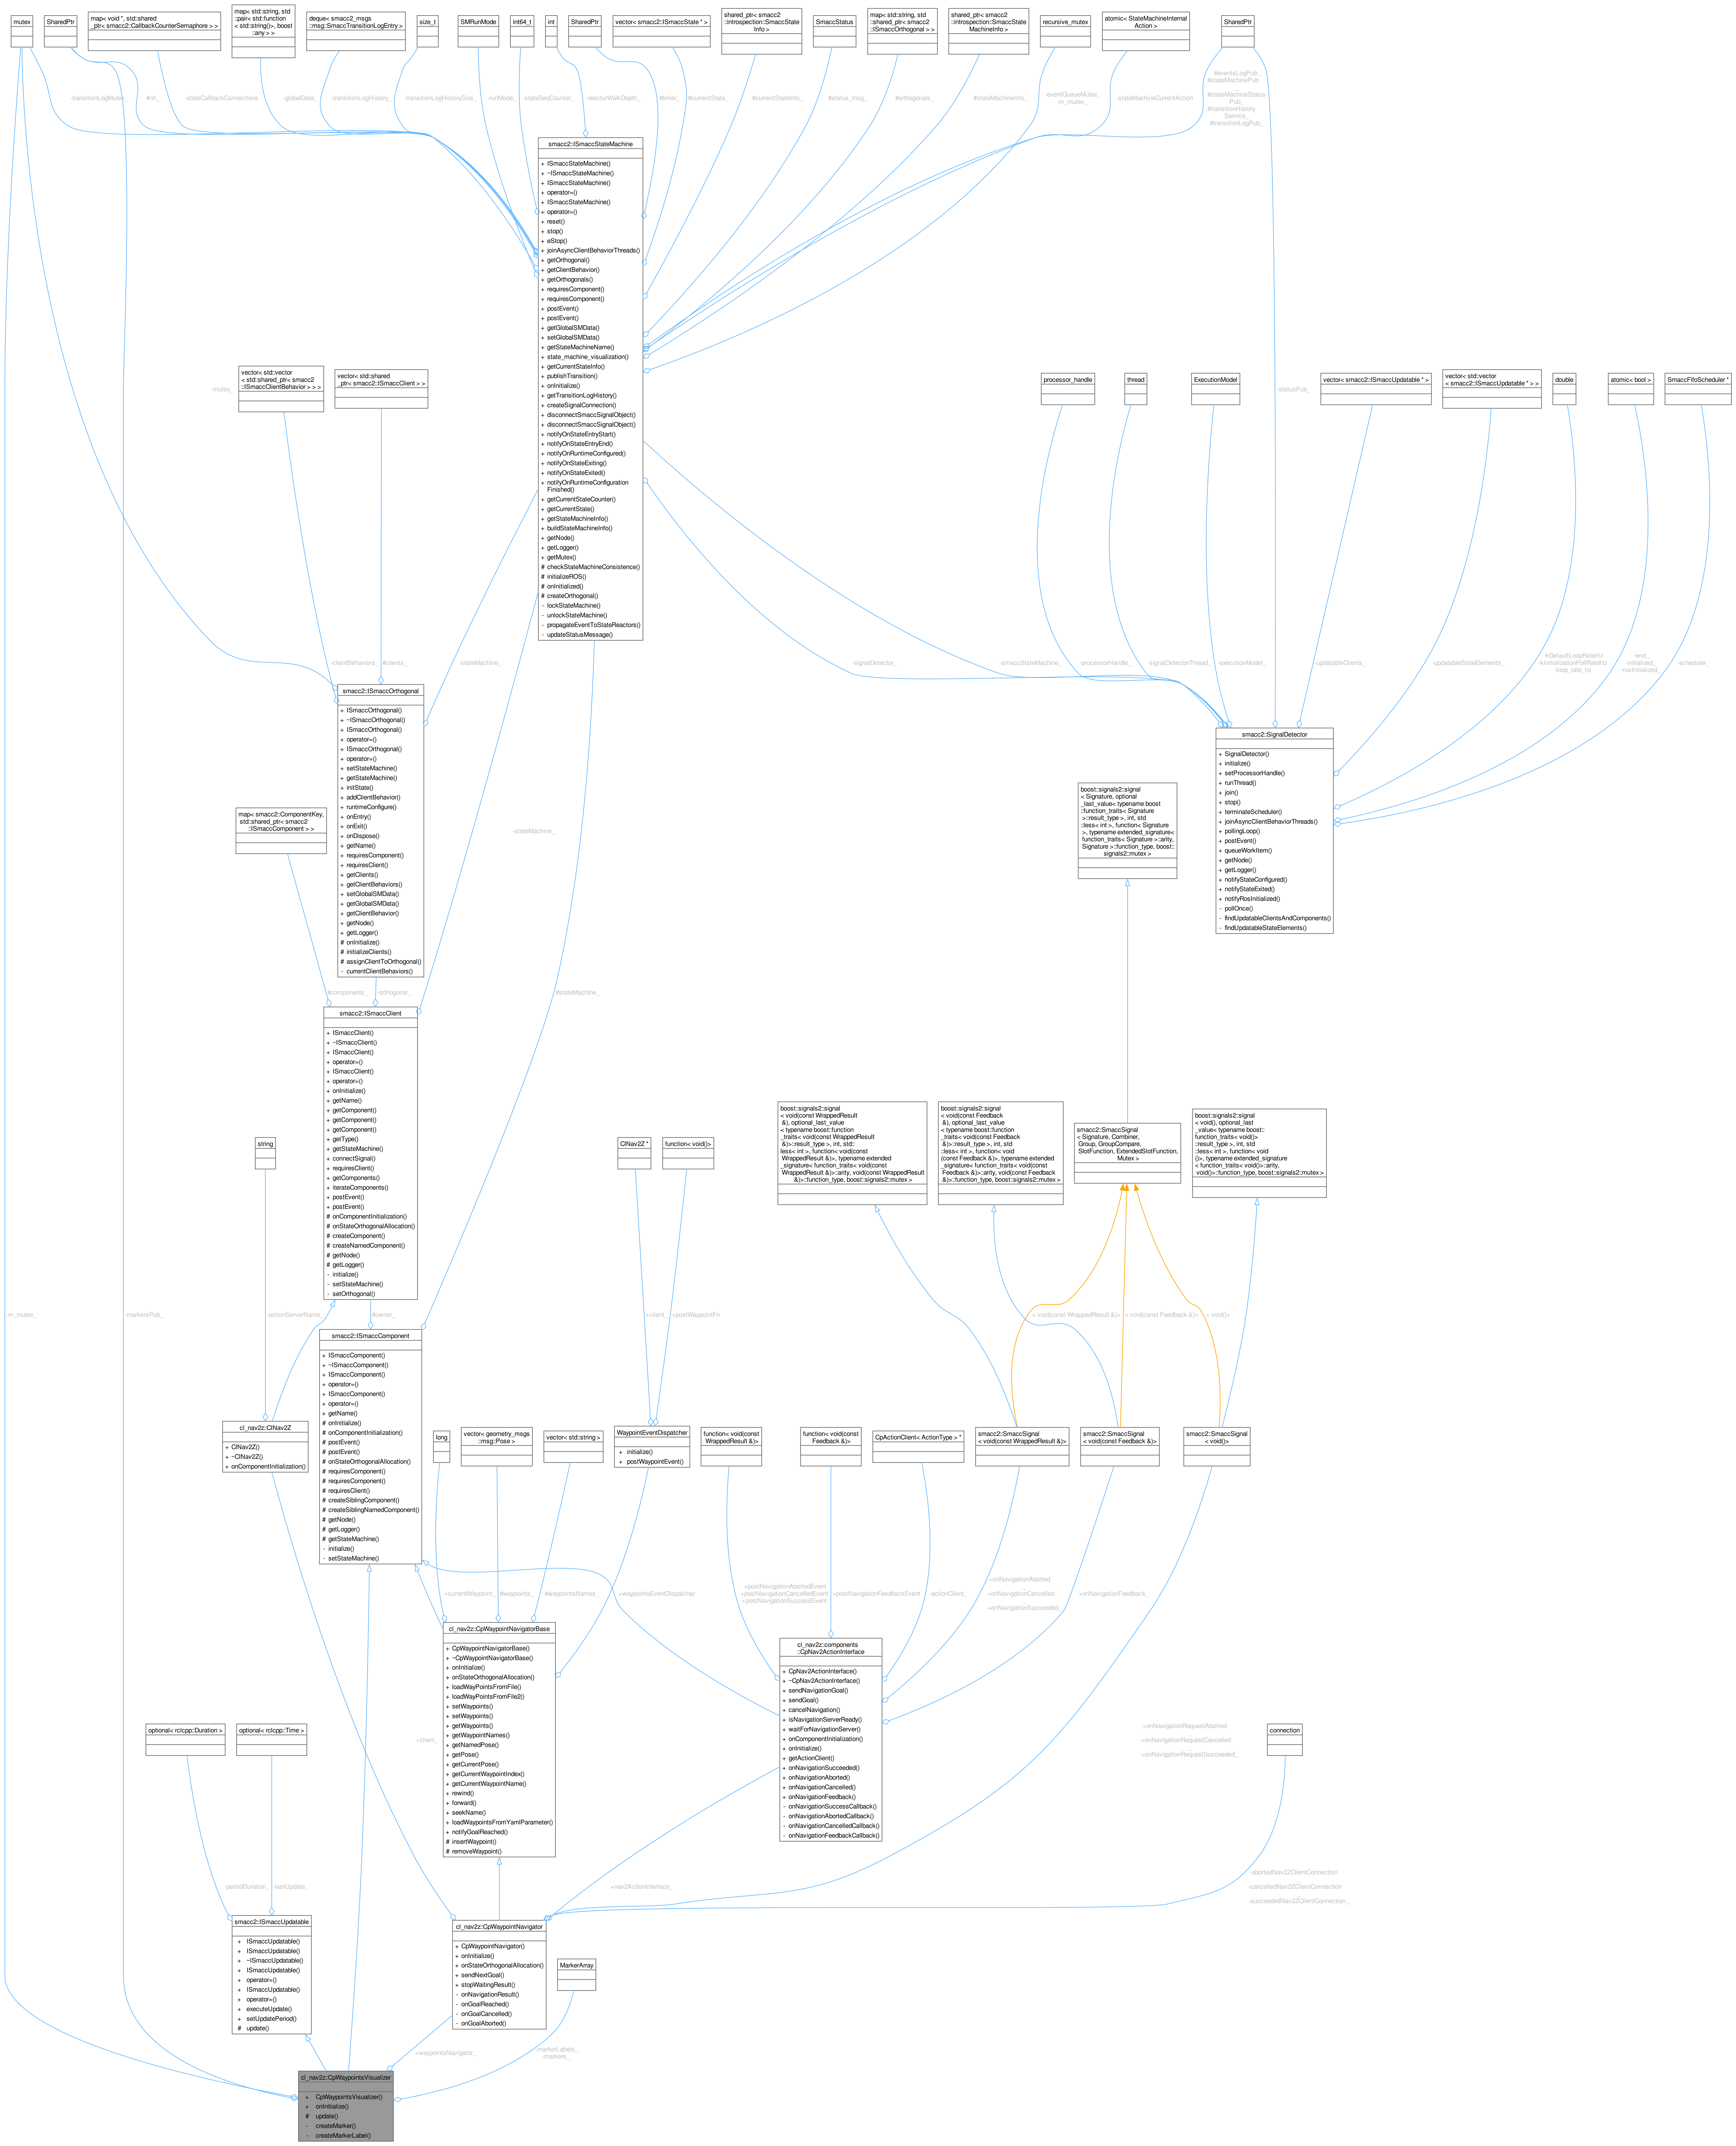
mutex
SharedPtr
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std::pair< std::function< std::string()>, boost::any > >
deque< smacc2_msgs::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
int
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2::introspection::SmaccStateInfo >
SmaccStatus
map< std::string, std::shared_ptr< smacc2::ISmaccOrthogonal > >
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
recursive_mutex
atomic< StateMachineInternalAction >
SharedPtr
-transitionLogMutex_
#nh_
-stateCallbackConnections
-globalData_
-transitionLogHistory_
-transitionLogHistorySize_
-runMode_
-stateSeqCounter_
-reactorWalkDepth_
#timer_
#currentState_
#currentStateInfo_
#status_msg_
#orthogonals_
#stateMachineInfo_
-eventQueueMutex_
-m_mutex_
-stateMachineCurrentAction
#eventsLogPub_
#stateMachinePub_
#stateMachineStatusPub_
#transitionHistoryService_
#transitionLogPub_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ ISmaccStateMachine()
+ operator=()
+ ISmaccStateMachine()
+ operator=()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfigurationFinished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
-mutex_
vector< std::vector< std::shared_ptr< smacc2::ISmaccClientBehavior > > >
vector< std::shared_ptr< smacc2::ISmaccClient > >
-clientBehaviors_
#clients_
-stateMachine_
-signalDetector_
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector< smacc2::ISmaccUpdatable * > >
double
atomic< bool >
SmaccFifoScheduler *
-statusPub_
-smaccStateMachine_
-processorHandle_
-signalDetectorThread_
-executionModel_
-updatableClients_
-updatableStateElements_
-kDefaultLoopRateHz
-kInitializationPollRateHz
-loop_rate_hz
-end_
-initialized_
-rosInitialized_
-scheduler_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
map< smacc2::ComponentKey, std::shared_ptr< smacc2::ISmaccComponent > >
-stateMachine_
#components_
-orthogonal_
#stateMachine_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
boost::signals2::signal< Signature, optional_last_value< typename boost::function_traits< Signature >::result_type >, int, std::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost::signals2::mutex >
string
ClNav2Z *
function< void()>
boost::signals2::signal< void(const WrappedResult &), optional_last_value< typename boost::function_traits< void(const WrappedResult &)>::result_type >, int, std::less< int >, function< void(const WrappedResult &)>, typename extended_signature< function_traits< void(const WrappedResult &)>::arity, void(const WrappedResult &)>::function_type, boost::signals2::mutex >
boost::signals2::signal< void(const Feedback &), optional_last_value< typename boost::function_traits< void(const Feedback &)>::result_type >, int, std::less< int >, function< void(const Feedback &)>, typename extended_signature< function_traits< void(const Feedback &)>::arity, void(const Feedback &)>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
boost::signals2::signal< void(), optional_last_value< typename boost::function_traits< void()>::result_type >, int, std::less< int >, function< void ()>, typename extended_signature< function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
-m_mutex_
-markersPub_
-actionServerName_
#owner_
+client_
+postWaypointFn
< void(const WrappedResult &)>
< void(const Feedback &)>
< void()>
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
cl_nav2z::ClNav2Z
+ ClNav2Z()
+ ~ClNav2Z()
+ onComponentInitialization()
long
vector< geometry_msgs::msg::Pose >
vector< std::string >
WaypointEventDispatcher
+ initialize()
+ postWaypointEvent()
function< void(const WrappedResult &)>
function< void(const Feedback &)>
CpActionClient< ActionType > *
smacc2::SmaccSignal< void(const WrappedResult &)>
smacc2::SmaccSignal< void(const Feedback &)>
smacc2::SmaccSignal< void()>
+currentWaypoint_
#waypoints_
#waypointsNames_
+waypointsEventDispatcher
+postNavigationAbortedEvent
+postNavigationCancelledEvent
+postNavigationSuccessEvent
+postNavigationFeedbackEvent
-actionClient_
+onNavigationAborted_
+onNavigationCancelled_
+onNavigationSucceeded_
+onNavigationFeedback_
cl_nav2z::CpWaypointNavigatorBase
+ CpWaypointNavigatorBase()
+ ~CpWaypointNavigatorBase()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ loadWayPointsFromFile()
+ loadWayPointsFromFile2()
+ setWaypoints()
+ setWaypoints()
+ getWaypoints()
+ getWaypointNames()
+ getNamedPose()
+ getPose()
+ getCurrentPose()
+ getCurrentWaypointIndex()
+ getCurrentWaypointName()
+ rewind()
+ forward()
+ seekName()
+ loadWaypointsFromYamlParameter()
+ notifyGoalReached()
# insertWaypoint()
# removeWaypoint()
cl_nav2z::components::CpNav2ActionInterface
+ CpNav2ActionInterface()
+ ~CpNav2ActionInterface()
+ sendNavigationGoal()
+ sendGoal()
+ cancelNavigation()
+ isNavigationServerReady()
+ waitForNavigationServer()
+ onComponentInitialization()
+ onInitialize()
+ getActionClient()
+ onNavigationSucceeded()
+ onNavigationAborted()
+ onNavigationCancelled()
+ onNavigationFeedback()
- onNavigationSuccessCallback()
- onNavigationAbortedCallback()
- onNavigationCancelledCallback()
- onNavigationFeedbackCallback()
+onNavigationRequestAborted_
+onNavigationRequestCancelled_
+onNavigationRequestSucceeded_
connection
+client_
optional< rclcpp::Duration >
optional< rclcpp::Time >
-periodDuration_
-lastUpdate_
+nav2ActionInterface_
-abortedNav2ZClientConnection_
-cancelledNav2ZClientConnection_
-succeededNav2ZClientConnection_
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ ISmaccUpdatable()
+ operator=()
+ ISmaccUpdatable()
+ operator=()
+ executeUpdate()
+ setUpdatePeriod()
# update()
cl_nav2z::CpWaypointNavigator
+ CpWaypointNavigator()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ sendNextGoal()
+ stopWaitingResult()
- onNavigationResult()
- onGoalReached()
- onGoalCancelled()
- onGoalAborted()
MarkerArray
+waypointsNavigator_
-markerLabels_
-markers_
cl_nav2z::CpWaypointsVisualizer
+ CpWaypointsVisualizer()
+ onInitialize()
# update()
- createMarker()
- createMarkerLabel()