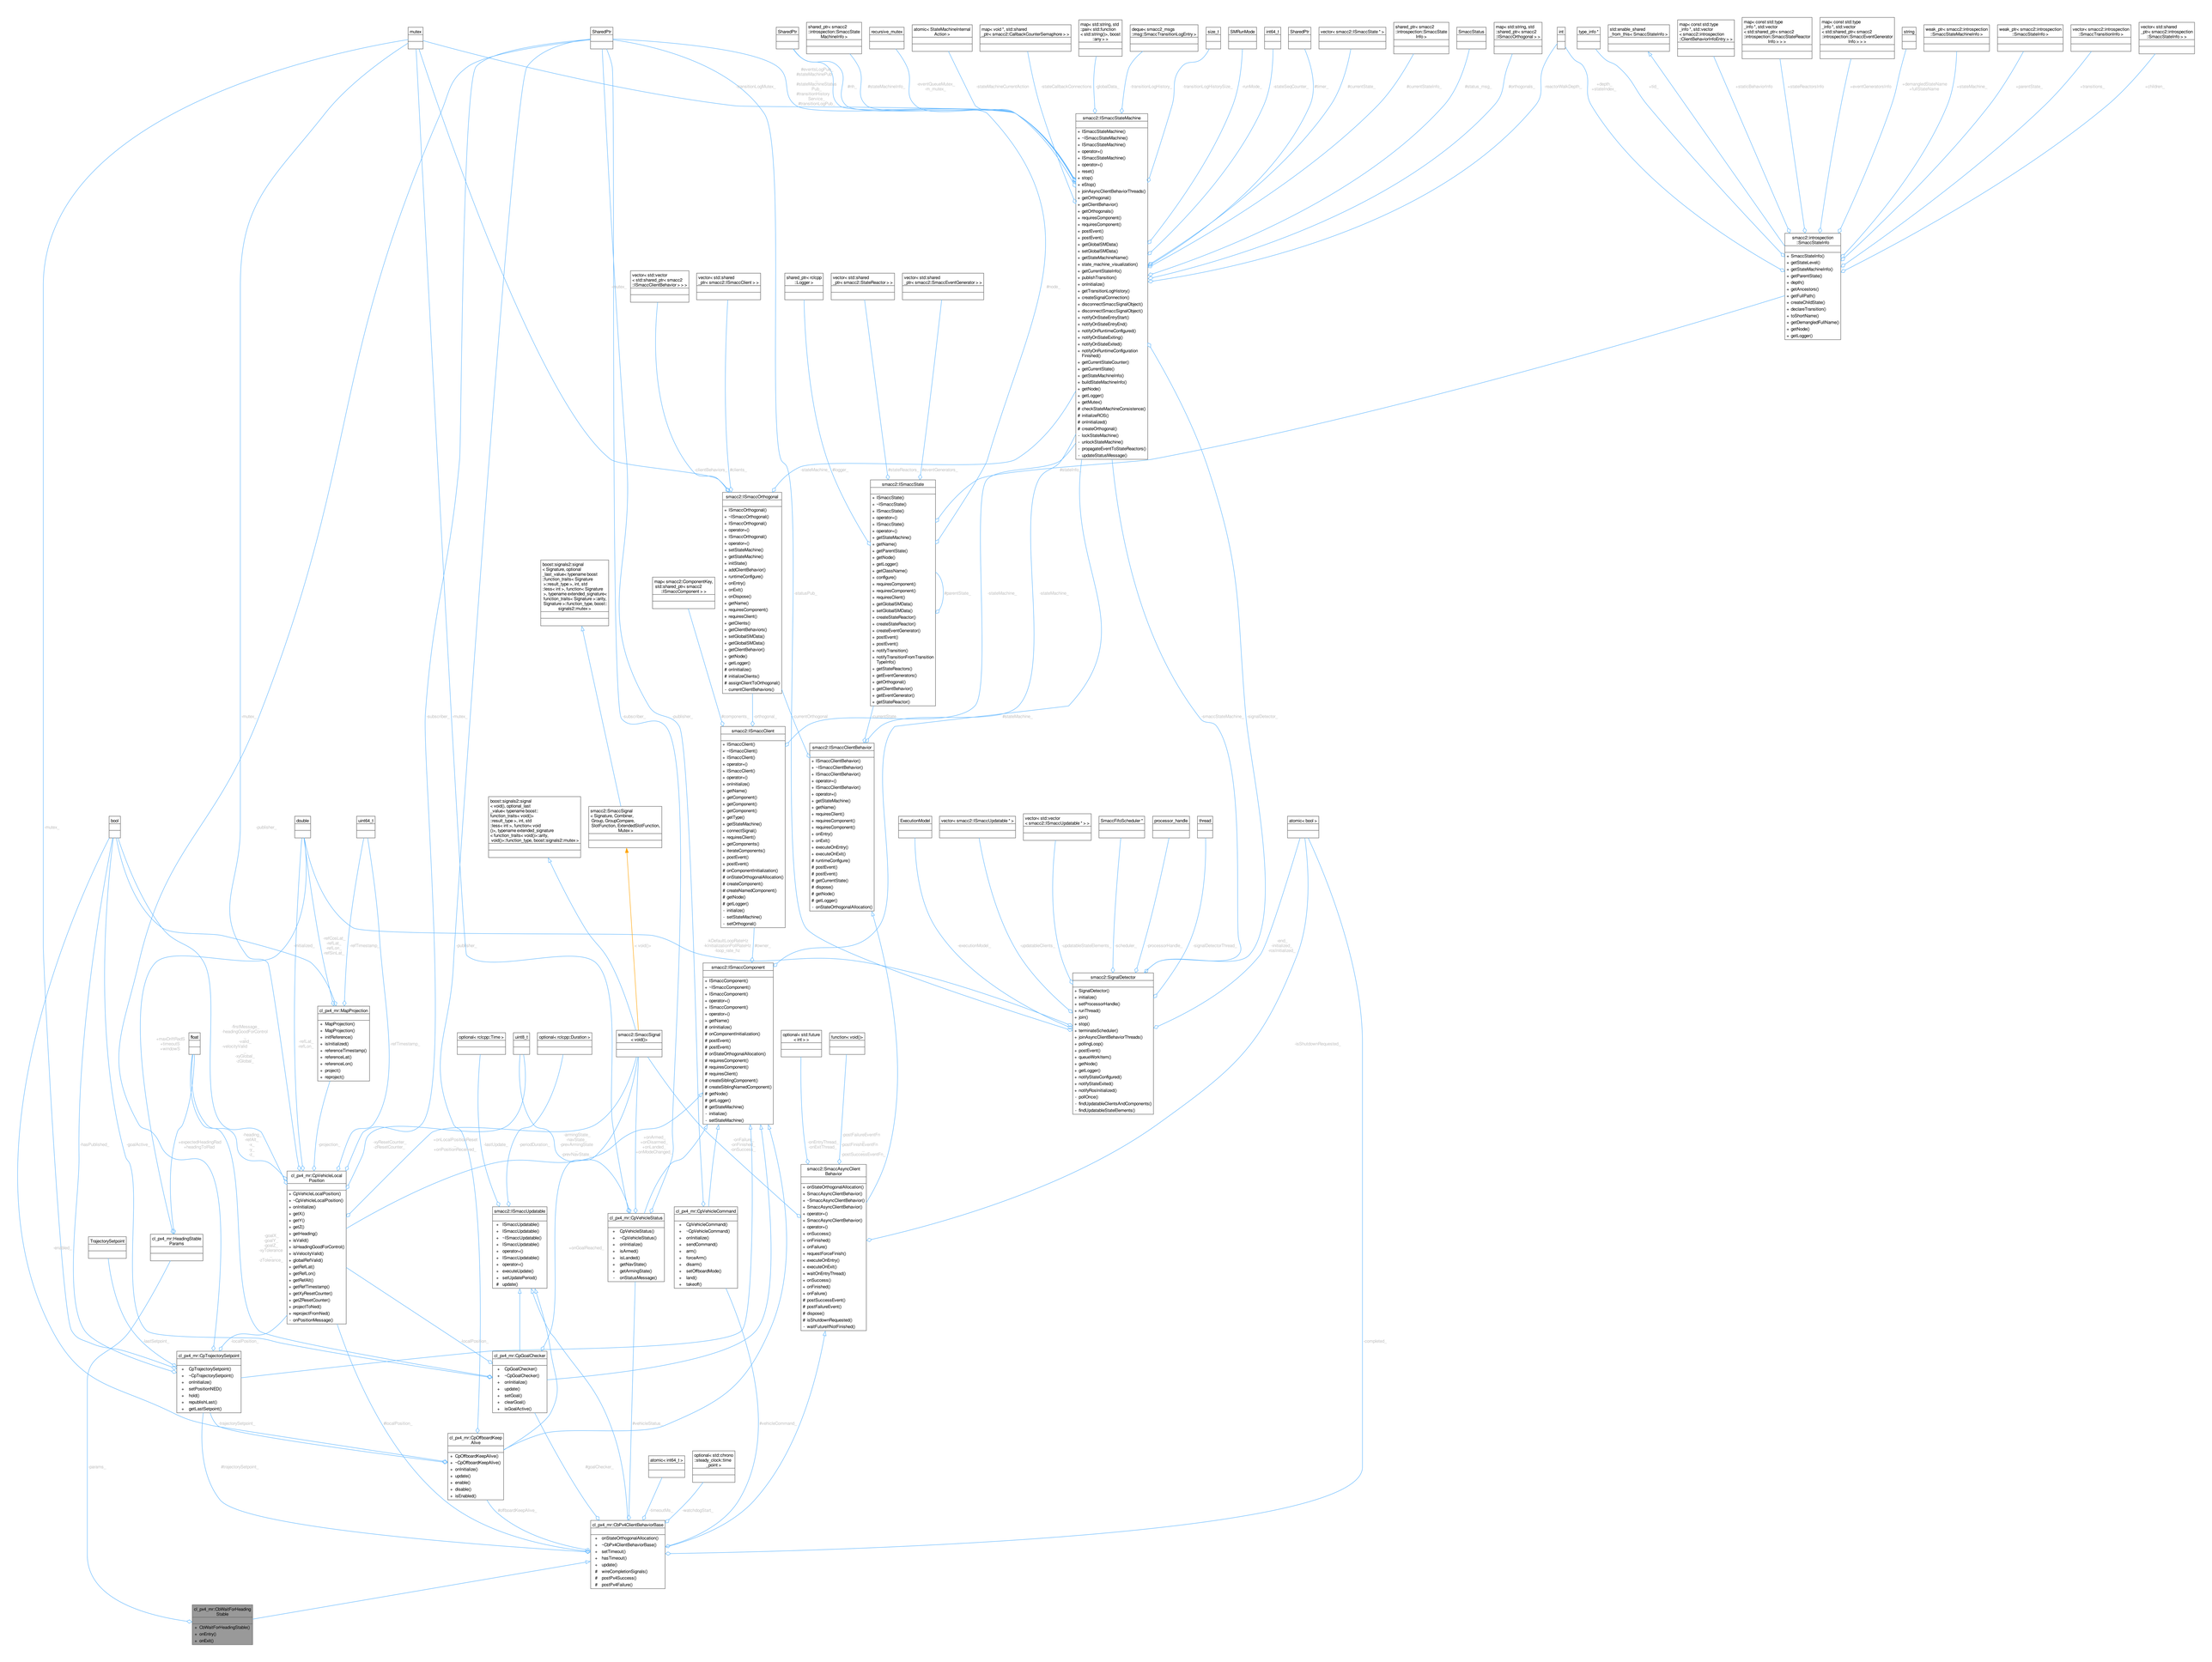
mutex
SharedPtr
SharedPtr
shared_ptr< smacc2 ::introspection::ISmaccState MachineInfo >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared _ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std ::pair< std::function < std::string() >, boost ::any > >
deque< smacc2_msgs ::msg::SmaccTransitionLogEntry >
size_t
SMRunMode
int64_t
SharedPtr
vector< smacc2::ISmaccState * >
shared_ptr< smacc2 ::introspection::ISmaccState Info >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal* > >
int
type_info *
std::enable_shared _from_this< SmaccStateInfo >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::ISmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::ISmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::ISmaccEventGenerator Info > > >
string
weak_ptr< smacc2::introspection ::ISmaccStateMachineInfo >
weak_ptr< smacc2::introspection ::ISmaccStateInfo >
vector< smacc2::introspection ::ISmaccTransitionInfo >
vector< std::shared _ptr< smacc2::introspection ::ISmaccStateInfo > >
smacc2::ISmaccStateMachine
smacc2::introspection ::ISmaccStateInfo
vector< std::vector < std::shared_ptr< smacc2 ::ISmaccClientBehavior > > >
vector< std::shared _ptr< smacc2::ISmaccClient > >
shared_ptr< rclcpp ::Logger >
vector< std::shared _ptr< smacc2::StateReactor > >
vector< std::shared _ptr< smacc2::ISmaccEventGenerator > >
smacc2::ISmaccOrthogonal
smacc2::ISmaccState
boost::signals2::signal < Signature, optional _last_value= typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< void (bx, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex > >
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
smacc2::ISmaccClient
smacc2::ISmaccClientBehavior
boost::signals2::signal < void(), optional_last _value= typename boost ::function_traits< boost ::result_type >, int, std ::less< int >, function< void (bx, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex > >
smacc2::SmaccSignal < void() >
smacc2::ISmaccComponent
smacc2::SignalDetector
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< smacc2::ISmaccUpdatable * >
SmaccFifoScheduler*
processor_handle
thread
atomic< bool >
cl_p4_mr::ClVehicleLocal Position
cl_p4_mr::ClpVehicleLocalPosition()
~ClpVehicleLocalPosition()
onInitialize()
getX()
getY()
getZ()
getHeading()
isValid()
isHeadingGoodForControl()
isVelocityValid()
globalRefValid()
getRefLat()
getRefLon()
getRefAlt()
getRefTimestamp()
getXyResetCounter()
getZResetCounter()
projectToField()
reprojectFromField()
onPositionMessage()
smacc2::ISmaccUpdatable
ISmaccUpdatable()
~ISmaccUpdatable()
operator=()
ISmaccUpdatable()
setStateMachine()
initialize()
update()
setUpdatePeriod()
cl_p4_mr::ClpVehicleStatus
ClpVehicleStatus()
~ClpVehicleStatus()
onInitialize()
isArmed()
isLanded()
getNavState()
getArmingState()
onStatusMessage()
cl_p4_mr::ClpVehicleCommand
ClpVehicleCommand()
~ClpVehicleCommand()
onInitialize()
sendCommand()
arm()
forceArm()
disarm()
setOffboardMode()
land()
takeoff()
smacc2::ISmaccAsyncClient Behavior
onStateOrthogonalAllocation()
SmaccAsyncClientBehavior()
~SmaccAsyncClientBehavior()
SmaccAsyncClientBehavior()
operator=()
onSuccess()
onFinished()
onFailure()
requestForceFinish()
executeOnEntry()
executeOnExit()
waitOnEntryThread()
onSuccess()
onFinished()
onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
boost::signals2::signal < void(), optional_last _value= typename boost ::function_traits< boost ::result_type >, int, std ::less< int >, function< void (bx, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex > >
smacc2::SmaccSignal < Source(Args...), Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
cl_p4_mr::MapProjection
MapProjection()
~MapProjection()
initReference()
isInitialized()
referenceTimestamp()
referenceLat()
referenceLon()
project()
reproject()
float
optional< rclcpp::Time >
uint8_t
optional< rclcpp::Duration >
smacc2::SmaccSignal < void() >
optional< std::future < int > >
function< void()>
cl_p4_mr::CpTrajectorySetpoint
CpTrajectorySetpoint()
~CpTrajectorySetpoint()
onInitialize()
setPositionNED()
hold()
republishLast()
getLastSetpoint()
cl_p4_mr::HeadingStable Params
TrajectorySetpoint
cl_p4_mr::CpGoalChecker
CpGoalChecker()
~CpGoalChecker()
onInitialize()
update()
setGoal()
clearGoal()
isGoalActive()
cl_p4_mr::ClpOffboardKeep Alive
ClpOffboardKeepAlive()
~ClpOffboardKeepAlive()
onInitialize()
update()
enable()
disable()
isEnabled()
atomic< int64_t >
optional< std::chrono ::steady_clock::time _point >
cl_p4_mr::ClbPx4ClientBehaviorBase
onStateOrthogonalAllocation()
~ClbPx4ClientBehaviorBase()
setTimeout()
hasTimeout()
update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
cl_p4_mr::ClWaitForHeading Stable
ClWaitForHeadingStable()
onEntry()
onExit()
bool
double
uint64_t