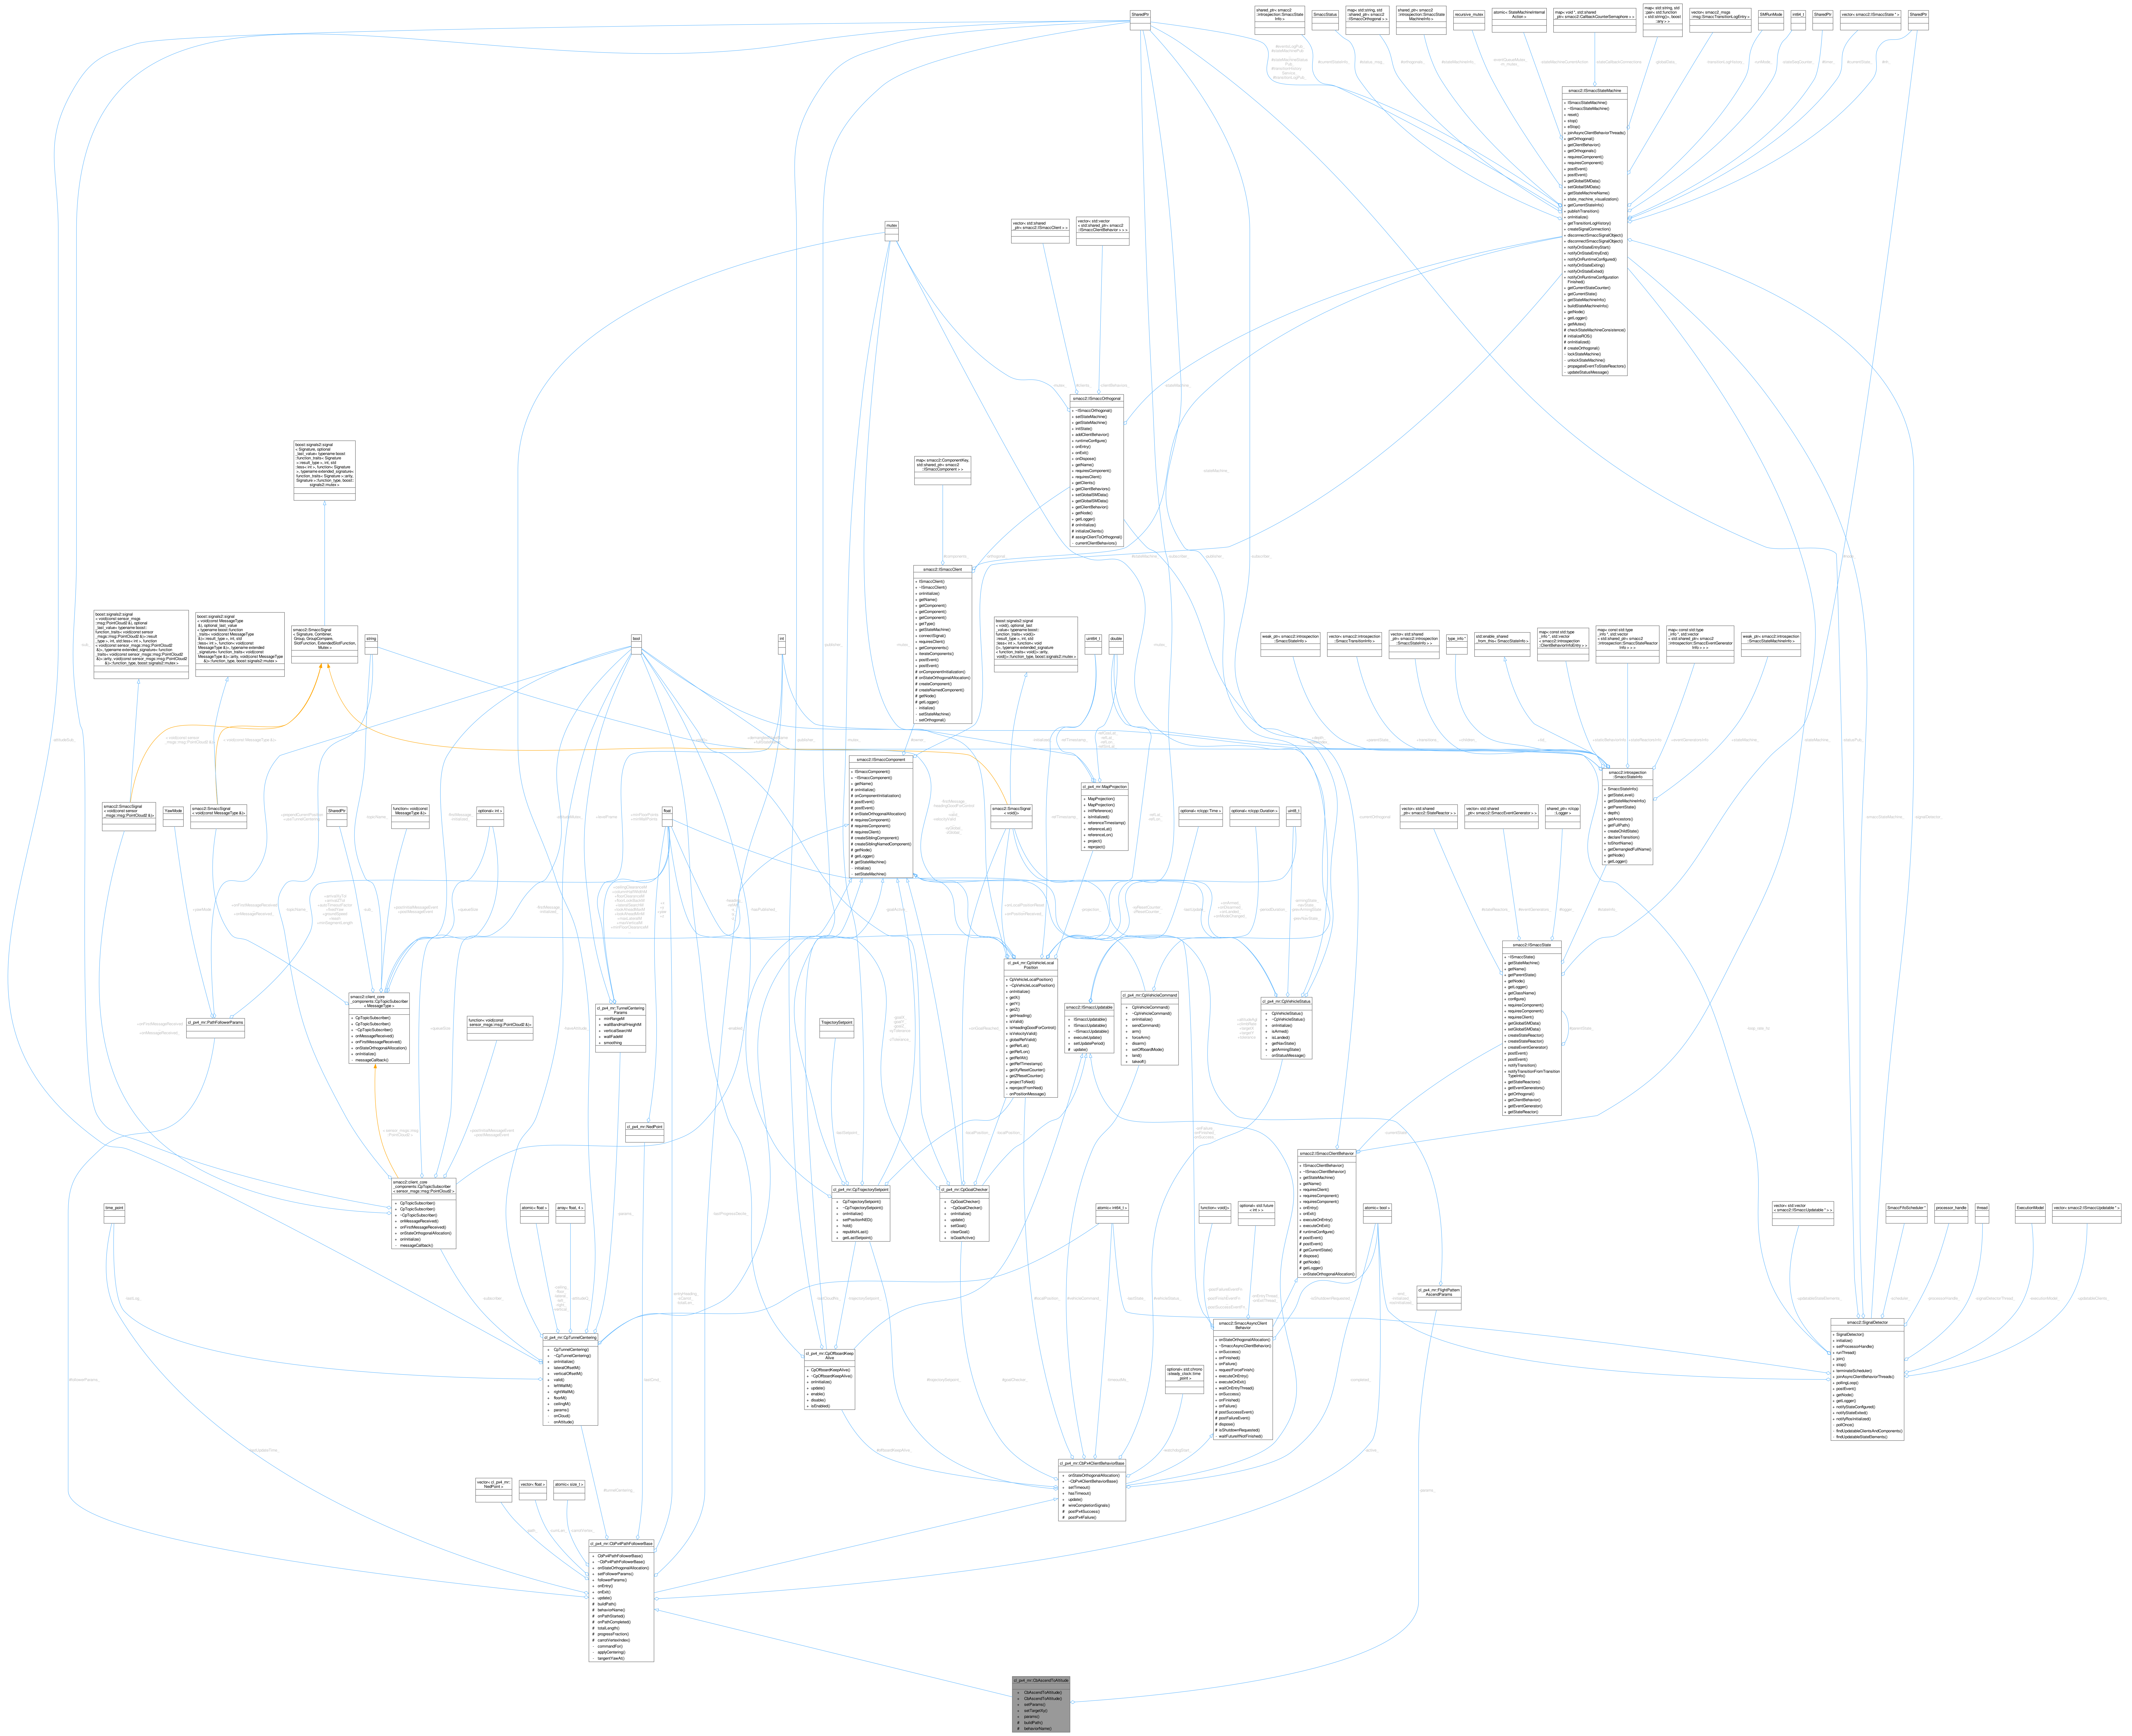
cl_px4_mr::CbAscendToAltitude
+ CbAscendToAltitude()
+ CbAscendToAltitude()
+ setParams()
+ setTargetXy()
+ params()
# buildPath()
# behaviorName()
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
atomic< size_t >
-cumLen_
-carrotVertex_
#tunnelCentering_
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#goalChecker_
-timeoutMs_
-watchdog
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
-stateMachineCurrentAction
-stateCallbackConnections
-globalData_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
-updatableStateElements_
-scheduler_
-processorHandle_
SharedPtr
mutex
smacc2::ISmaccOrthogonal
smacc2::ISmaccClient
smacc2::ISmaccComponent
smacc2::ISmaccSignal
smacc2::SmaccSignal< void()>
cl_px4_mr::CpVehicleLocalPosition
smacc2::ISmaccUpdatable
cl_px4_mr::CpVehicleCommand
cl_px4_mr::CpVehicleStatus
cl_px4_mr::MapProjection
smacc2::introspection::SmaccStateInfo
smacc2::ISmaccState
smacc2::ISmaccClientBehavior
smacc2::SmaccAsyncClientBehavior
smacc2::client_core_components::CpTopicSubscriber< MessageType >
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
cl_px4_mr::CpTunnelCentering
cl_px4_mr::TunnelCenteringParams
cl_px4_mr::PathFollowerParams
cl_px4_mr::NedPoint
cl_px4_mr::CpTrajectorySetpoint
cl_px4_mr::CpGoalChecker
cl_px4_mr::CpOffboardKeepAlive
cl_px4_mr::FlightPatternAscendParams
TrajectorySetpoint
YawMode
string
bool
int
float
double
uint64_t
time_point
atomic< bool >
atomic< float >
atomic< uint64_t >
vector< float >
vector< cl_px4_mr::NedPoint >
thread
ExecutionModel