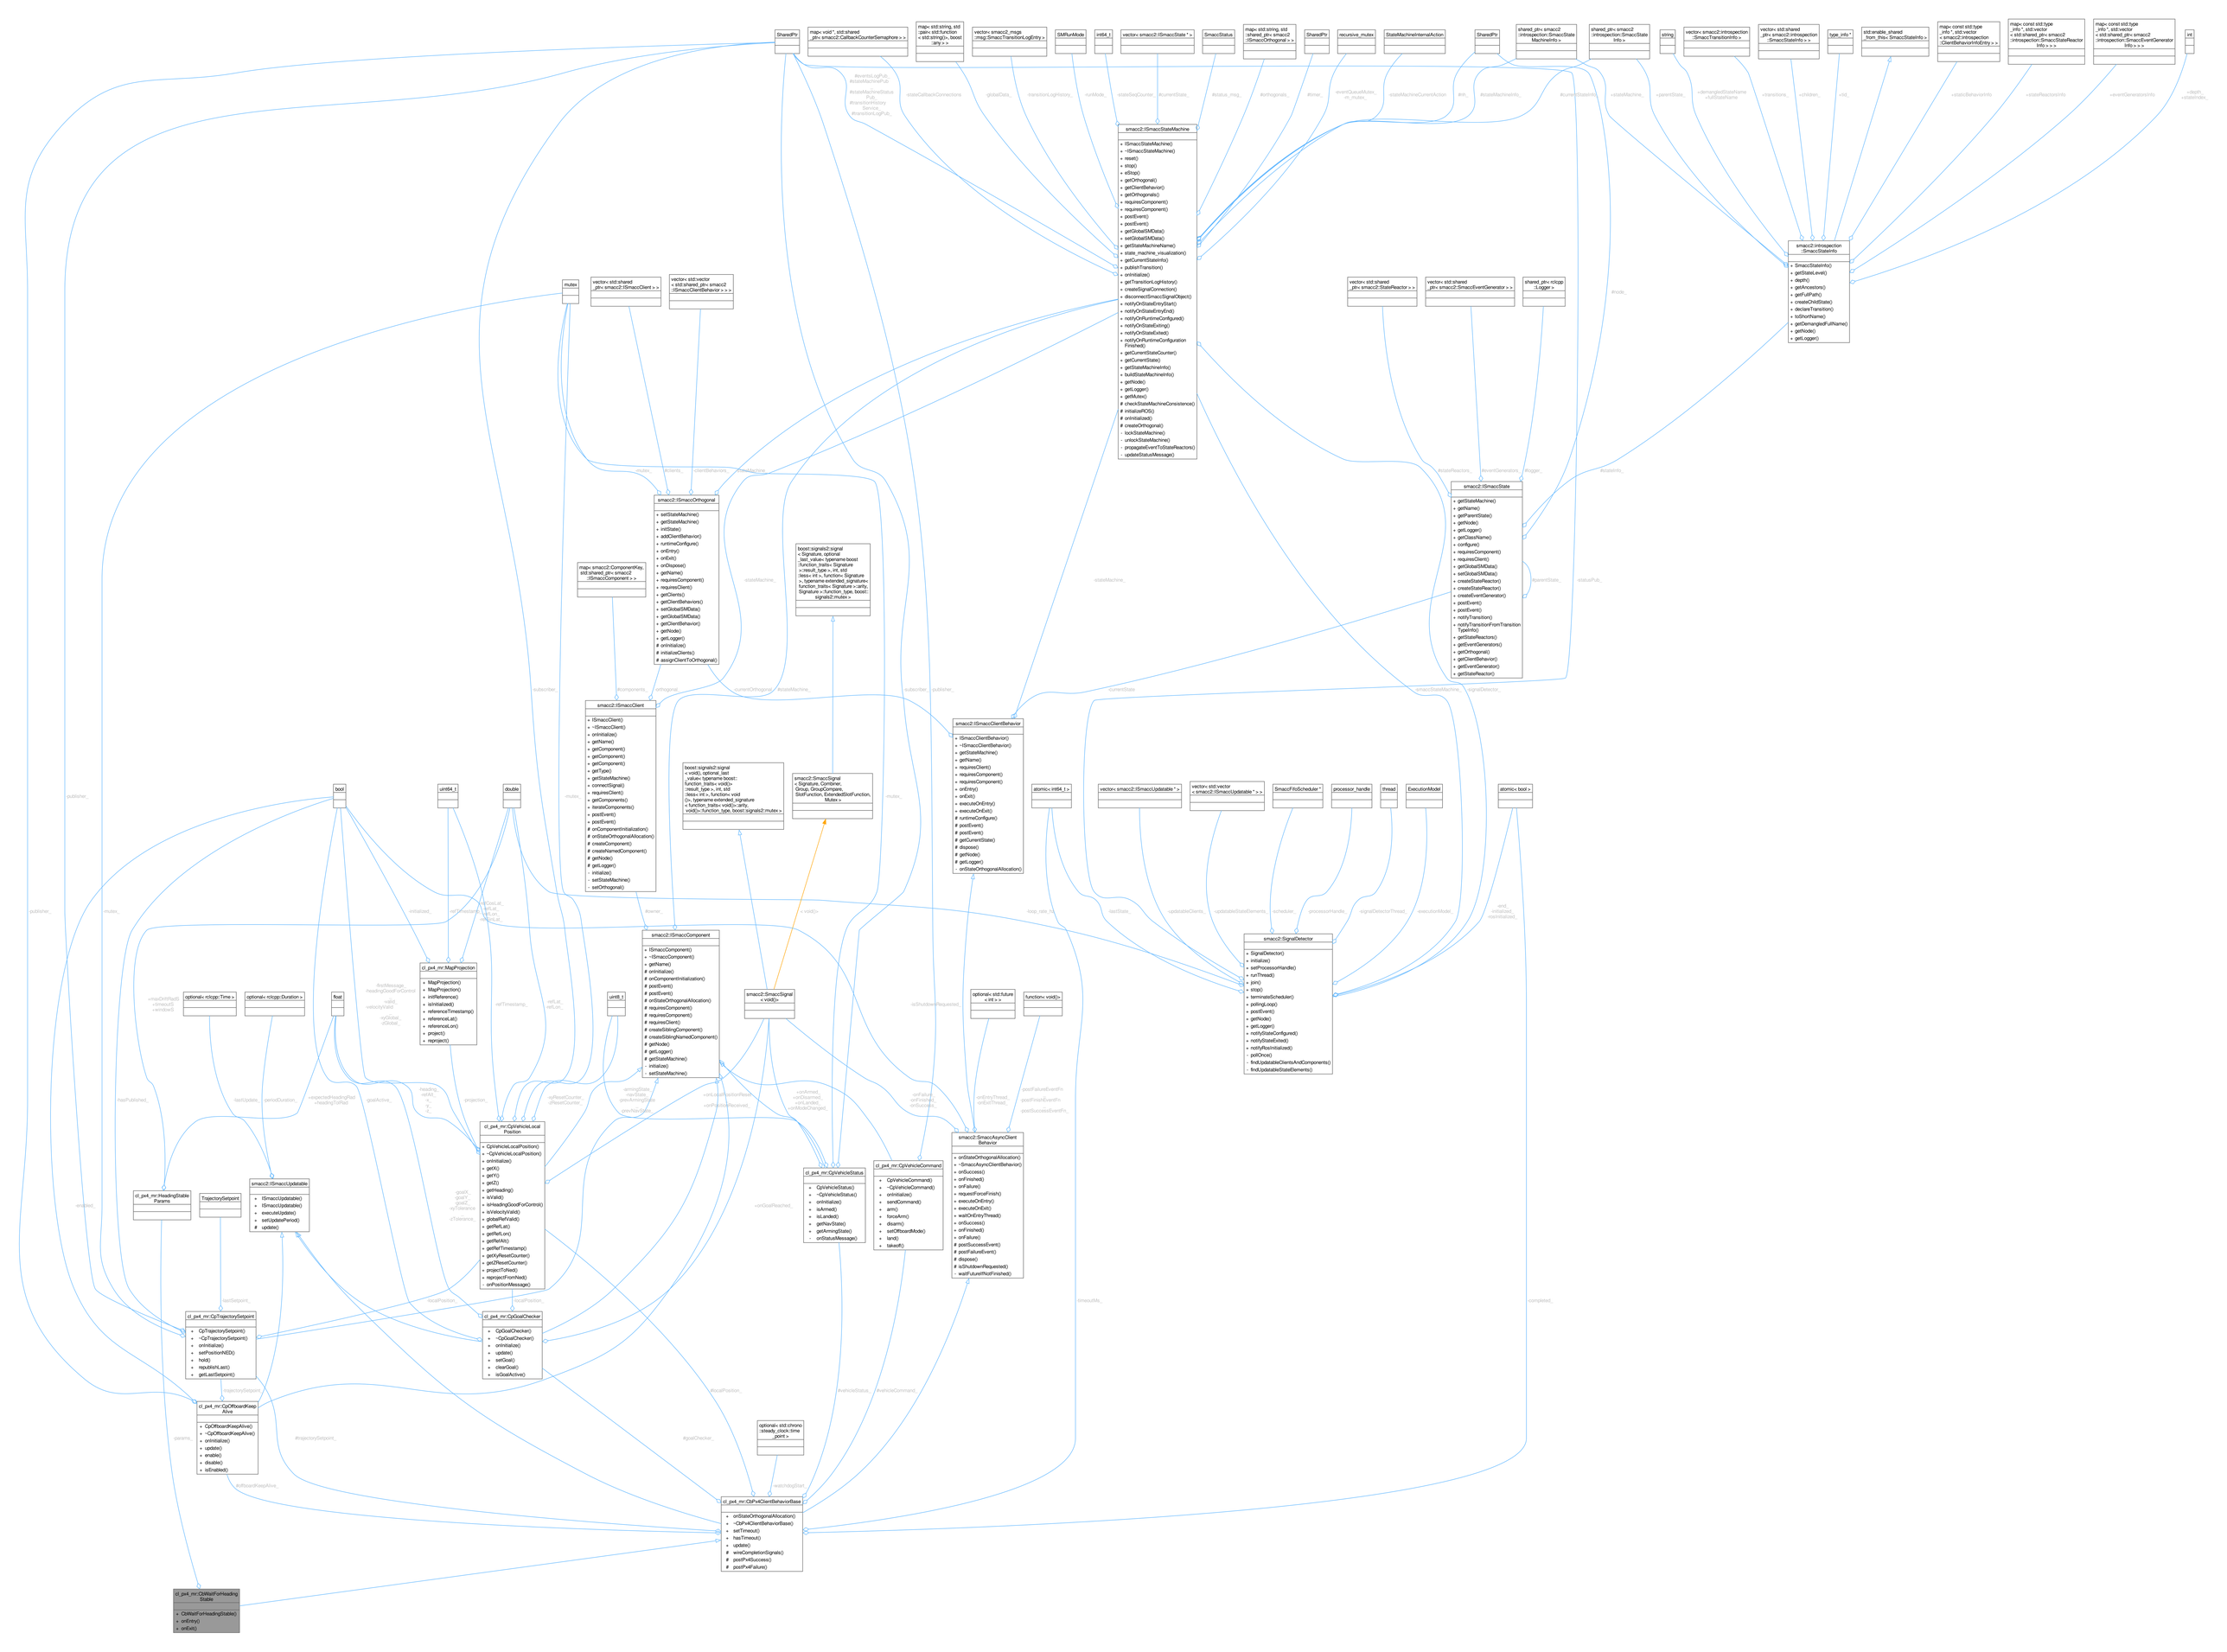
SharedPtr
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std::pair< std::function< std::string()>, boost::any > >
vector< smacc2_msgs ::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
vector< smacc2::ISmaccState * >
SmaccStatus
map< std::string, std::shared_ptr< smacc2 ::ISmaccOrthogonal > >
SharedPtr
recursive_mutex
StateMachineInternalAction
SharedPtr
shared_ptr< smacc2 ::introspection::SmaccState MachineInfo >
shared_ptr< smacc2 ::introspection::SmaccState Info >
string
vector< smacc2::introspection ::SmaccTransitionInfo >
vector< std::shared _ptr< smacc2::introspection ::SmaccStateInfo > >
type_info *
std::enable_shared _from_this< SmaccStateInfo >
map< const std::type _info *, std::vector < smacc2::introspection ::ClientBehaviorInfoEntry > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccStateReactor Info > > >
map< const std::type _info *, std::vector < std::shared_ptr< smacc2 ::introspection::SmaccEventGenerator Info > > >
int
#eventLogPub_
#stateMachinePub_
#stateMachineStatus _PubSub_
#transitionHistory _ServiceSs_
#transitionLogPub_
stateCallbackConnections_
globalData_
transitionLogHistory_
runMode_
stateSeqCounter_
#currentState_
#statusMsg_
#orthogonals_
#timer_
eventQueueMutex_
rh_mutex_
stateMachineCurrentAction_
#rh_
#stateMachineInfo_
#currentStateInfo_
stateMachine_
parentState_
demangledStateName
fullStateName
transitions_
children_
vid_
staticBehaviorInfo
stateReactorsInfo
eventGeneratorsInfo
depth_
stateIndex_
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfos()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initialisePOSs()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::introspection ::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
#node_
mutex_
#clients_
clientBehaviors_
#stateMachine_
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
vector< std::shared _ptr< smacc2::ISmaccClient > >
vector< std::vector < smacc2 ::ISmaccClientBehavior > >
vector< std::shared _ptr< smacc2::StateReactor > >
vector< std::shared _ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp ::Logger >
#stateReactors_
#eventGenerators_
#logger_
#stateInfo_
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#parentState_
#statePub_
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
boost::signals2::signal < Signature, optional _last_value= typename boost ::function_traits< Signature >::result_type >, int, std ::less< int >, function< Signature >, typename extended_signature< function_traits< Signature >::arity, Signature >::function_type, boost:: signals2::mutex >
#components_
#orthogonal_
#currentOrthogonal_
#stateMachine_
subscriber_
publisher_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
boost::signals2::signal < void(), optional_last _value< typename boost:: function_traits< void()> ::result_type >, int, std ::less< int >, function< void ()>, typename extended_signature < function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal < Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
< void()>
#owner_
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# requiresComponent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
smacc2::SmaccSignal < void()>
atomic< int64_t >
vector< smacc2::ISmaccUpdatable * >
vector< std::vector < smacc2::ISmaccUpdatable * > >
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
atomic< bool >
loop_rate_hz_
lastState_
updatableClients_
updatableStateElements_
scheduler_
processorHandle_
signalDetectorThread_
executionMode_
end_ initialized_ rosInitialized_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ pollingLoop()
+ postEvents()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
bool
uint64_t
double
publisher_
mutex_
initialized_
#startTimestamp_
#lastCost_id_
#leftLot_
#rightLot_
#bestLot_
cl_px4_mrc::MapProjection
+ MapProjection()
+ MapProjection()
+ initReference()
+ isInitialized()
+ referenceTimestamp()
+ referenceLat()
+ referenceLon()
+ project()
+ reproject()
optional< rclcpp::Time >
optional< rclcpp::Duration >
float
uint8_t
smacc2::SmaccSignal < void()>
optional< std::future < int > >
function< void()>
#mainDrifRad3 #timeoutS #windowS
firstMessage_ headingGoodForControl_
valid_ velocityValid_
vyGood_ dGlobal_
#refTimestamp_
#refLat_ #refLon_
#isShutdownRequested_
#hasPublished_
#lastUpdate_
periodDuration_
#expectedHeadingRad #headingToRad
goalActive_
heading_ refAlt_ x_ y_ z_
projection_
#wReset Counter_ #Reset Counter_
#armingState_ #navState_ prevArmingState_ prevNavState_
#onLocalPositionReset_
#onPositionReceived_
#onArmed_ #onDisarmed_ #onLanded_ #onModeChanged_
onFailure_ onFinished_ onSuccess_
onEntryThread_ onExitThread_
postFailureEventFn postFinishEventFn postSuccessEventFn_
cl_px4_mrc::HeadingStable Params
TrajectorySetpoint
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
goalX_ goalY_ goalZ_ #yToleranz_ #zTolerance_
cl_px4_mrc::CpVehicleLocal Position
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
cl_px4_mrc::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
cl_px4_mrc::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
smacc2::SmaccAsyncClient Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIsNotFinished()
#navigationStatus_
#signalDetector_
#currentState
#stateMachine_
#subscriber_ #publisher_
#mutex_
#publisher_
#subscriber_
#stateMachine_
#currentState
#smaccStateMachine_
#signalDetector_
cl_px4_mrc::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
cl_px4_mrc::CpOffboardKeep Alive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
cl_px4_mrc::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
optional< std::chrono ::steady_clock::time _point >
cl_px4_mrc::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# winsCompletionSignals()
# postPx4Success()
# postPx4Failure()
cl_px4_mrc::CbWaitForHeading Stable
+ CbWaitForHeadingStable()
+ onEntry()
+ onExit()
#subscriber_
#orthogonal_
#localPosition_
#stateMachine_
#goalChecker_
#trajectorySetpoint_
#offboardKeepAlive_
#vehicleStatus_
#vehicleCommand_
#timeoutMs_
#completed_
params_
#enabled_
lastSetpoint_
trajectorySetpoint_
watchdogStart_