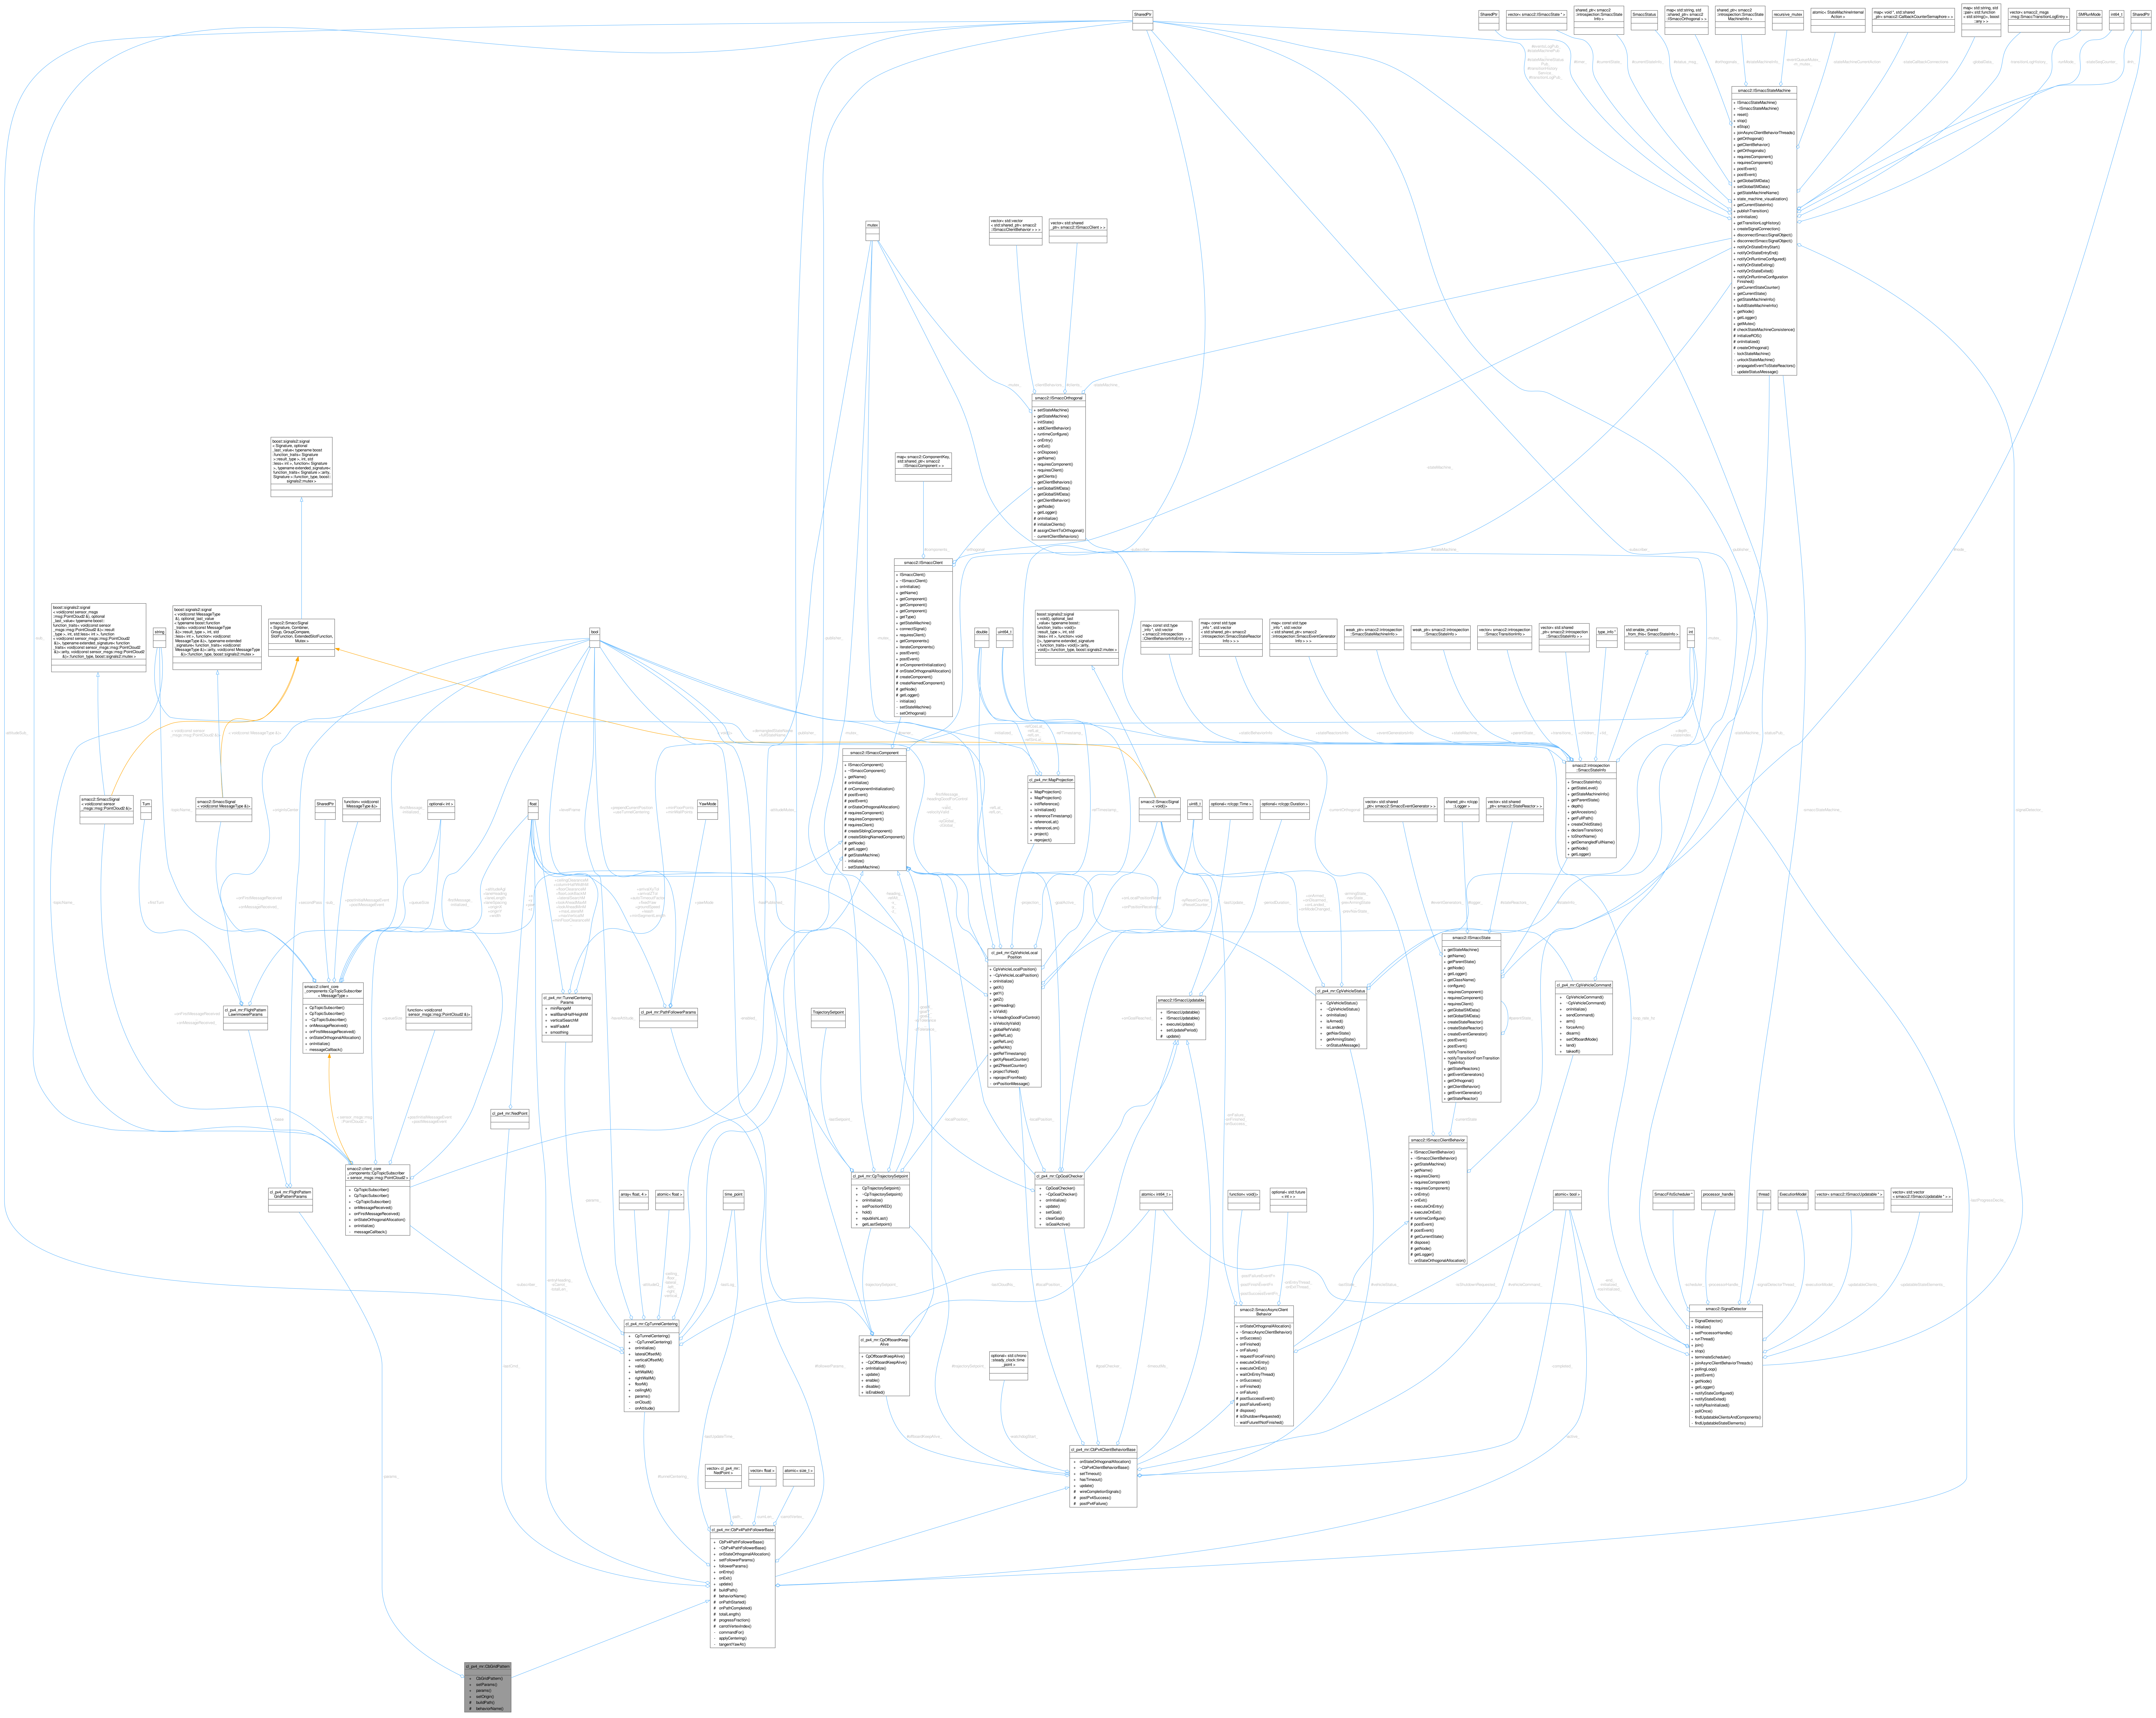
cl_px4_mr::CbGridPattern
+ CbGridPattern()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
-lastUpdateTime_
#tunnelCentering_
#followerParams_
-lastCmd_
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
array< float, 4 >
atomic< float >
time_point
-params_
-attitudeQ_
-ceiling_
-floor_
-lateral_
-left_
-right_
-vertical_
-lastLog_
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_px4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
optional< std::chrono::steady_clock::time_point >
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#offboardKeepAlive_
-watchdogStart_
#trajectorySetpoint_
#goalChecker_
-timeoutMs_
-lastSetpoint_
-localPosition_
-trajectorySetpoint_
-lastCloudNs_
#localPosition_
atomic< int64_t >
function< void()>
optional< std::future< int > >
smacc2::SmaccAsyncClientBehavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
-onFailure_
-onFinished_
-onSuccess_
-postFailureEventFn
-postFinishEventFn
-postSuccessEventFn
-onEntryThread_
-onExitThread_
cl_px4_mr::CpVehicleLocalPosition
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
cl_px4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransitionTypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
#parentState_
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
-currentState
atomic< bool >
-lastState_
#vehicleStatus_
-isShutdownRequested_
#vehicleCommand_
+onArmed_
+onDisarmed_
+onLanded_
+onModeChanged_
-armingState_
-navState_
-prevArmingState
-prevNavState_
#eventGenerators_
#logger_
#stateReactors_
#stateInfo_
-projection_
-goalActive_
+onLocalPositionReset
+onPositionReceived_
-xyResetCounter_
-zResetCounter_
-lastUpdate_
-periodDuration_
+onGoalReached_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
map< smacc2::ComponentKey, std::shared_ptr< smacc2::ISmaccComponent > >
#components_
-orthogonal_
#owner_
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
double
uint64_t
boost::signals2::signal< void(), optional_last_value< typename boost::function_traits< void()>::result_type >, int, std::less< int >, function< void()>, typename extended_signature< function_traits< void()>::arity, void()>::function_type, boost::signals2::mutex >
cl_px4_mr::MapProjection
+ MapProjection()
+ MapProjection()
+ initReference()
+ isInitialized()
+ referenceTimestamp()
+ referenceLat()
+ referenceLon()
+ project()
+ reproject()
-refCosLat_
-refLat_
-refLon_
-refSinLat_
-refTimestamp_
-initialized_
-publisher_
-mutex_
-firstMessage_
-headingGoodForControl
-valid_
-velocityValid
-xyGlobal_
-zGlobal_
-heading_
-refAlt_
-x_
-y_
-z_
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
boost::signals2::signal< void(const sensor_msgs::msg::PointCloud2 &), optional_last_value< typename boost::function_traits< void(const sensor_msgs::msg::PointCloud2 &)>::result_type >, int, std::less< int >, function< void(const sensor_msgs::msg::PointCloud2 &)>, typename extended_signature< function_traits< void(const sensor_msgs::msg::PointCloud2 &)>::arity, void(const sensor_msgs::msg::PointCloud2 &)>::function_type, boost::signals2::mutex >
string
boost::signals2::signal< void(const MessageType &), optional_last_value< typename boost::function_traits< void(const MessageType &)>::result_type >, int, std::less< int >, function< void(const MessageType &)>, typename extended_signature< function_traits< void(const MessageType &)>::arity, void(const MessageType &)>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal< Signature, Combiner, Group, GroupCompare, SlotFunction, ExtendedSlotFunction, Mutex >
bool
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
Turn
smacc2::SmaccSignal< void(const MessageType &)>
SharedPtr
function< void(const MessageType &)>
optional< int >
float
YawMode
< void(const sensor_msgs::msg::PointCloud2 &)>
< void(const MessageType &)>
+originIsCenter
+levelFrame
+prependCurrentPosition
+useTunnelCentering
+minFloorPoints
+minWallPoints
-attitudeMutex_
+demangledStateName
+fullStateName
-attitudeSub_
-sub_
-topicName_
+firstTurn
+onFirstMessageReceived
+onMessageReceived_
+secondPass
+postInitialMessageEvent
+postMessageEvent
+queueSize
-firstMessage_
-initialized_
+altitudeAgl
+laneHeading
+laneLength
+laneSpacing
+originX
+originY
+width
+x
+y
+yaw
+z
+ceilingClearanceM
+columnHalfWidthM
+floorClearanceM
+floorLookBackM
+lateralSearchM
+lookAheadMaxM
+lookAheadMinM
+maxLateralM
+maxVerticalM
+minFloorClearanceM
+arrivalXyTol
+arrivalZTol
+autoTimeoutFactor
+fixedYaw
+groundSpeed
+leash
+minSegmentLength
+yawMode
-hasPublished_
smacc2::client_core_components::CpTopicSubscriber< MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
cl_px4_mr::FlightPatternLawnmowerParams
function< void(const sensor_msgs::msg::PointCloud2 &)>
cl_px4_mr::TunnelCenteringParams
+ minRangeM
+ wallBandHalfHeightM
+ verticalSearchM
+ wallFadeM
+ smoothing
-haveAttitude_
cl_px4_mr::PathFollowerParams
-enabled_
+base
< sensor_msgs::msg::PointCloud2 >
cl_px4_mr::NedPoint
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
cl_px4_mr::FlightPatternGridPatternParams
-subscriber_
-entryHeading_
-sCarrot_
-totalLen_