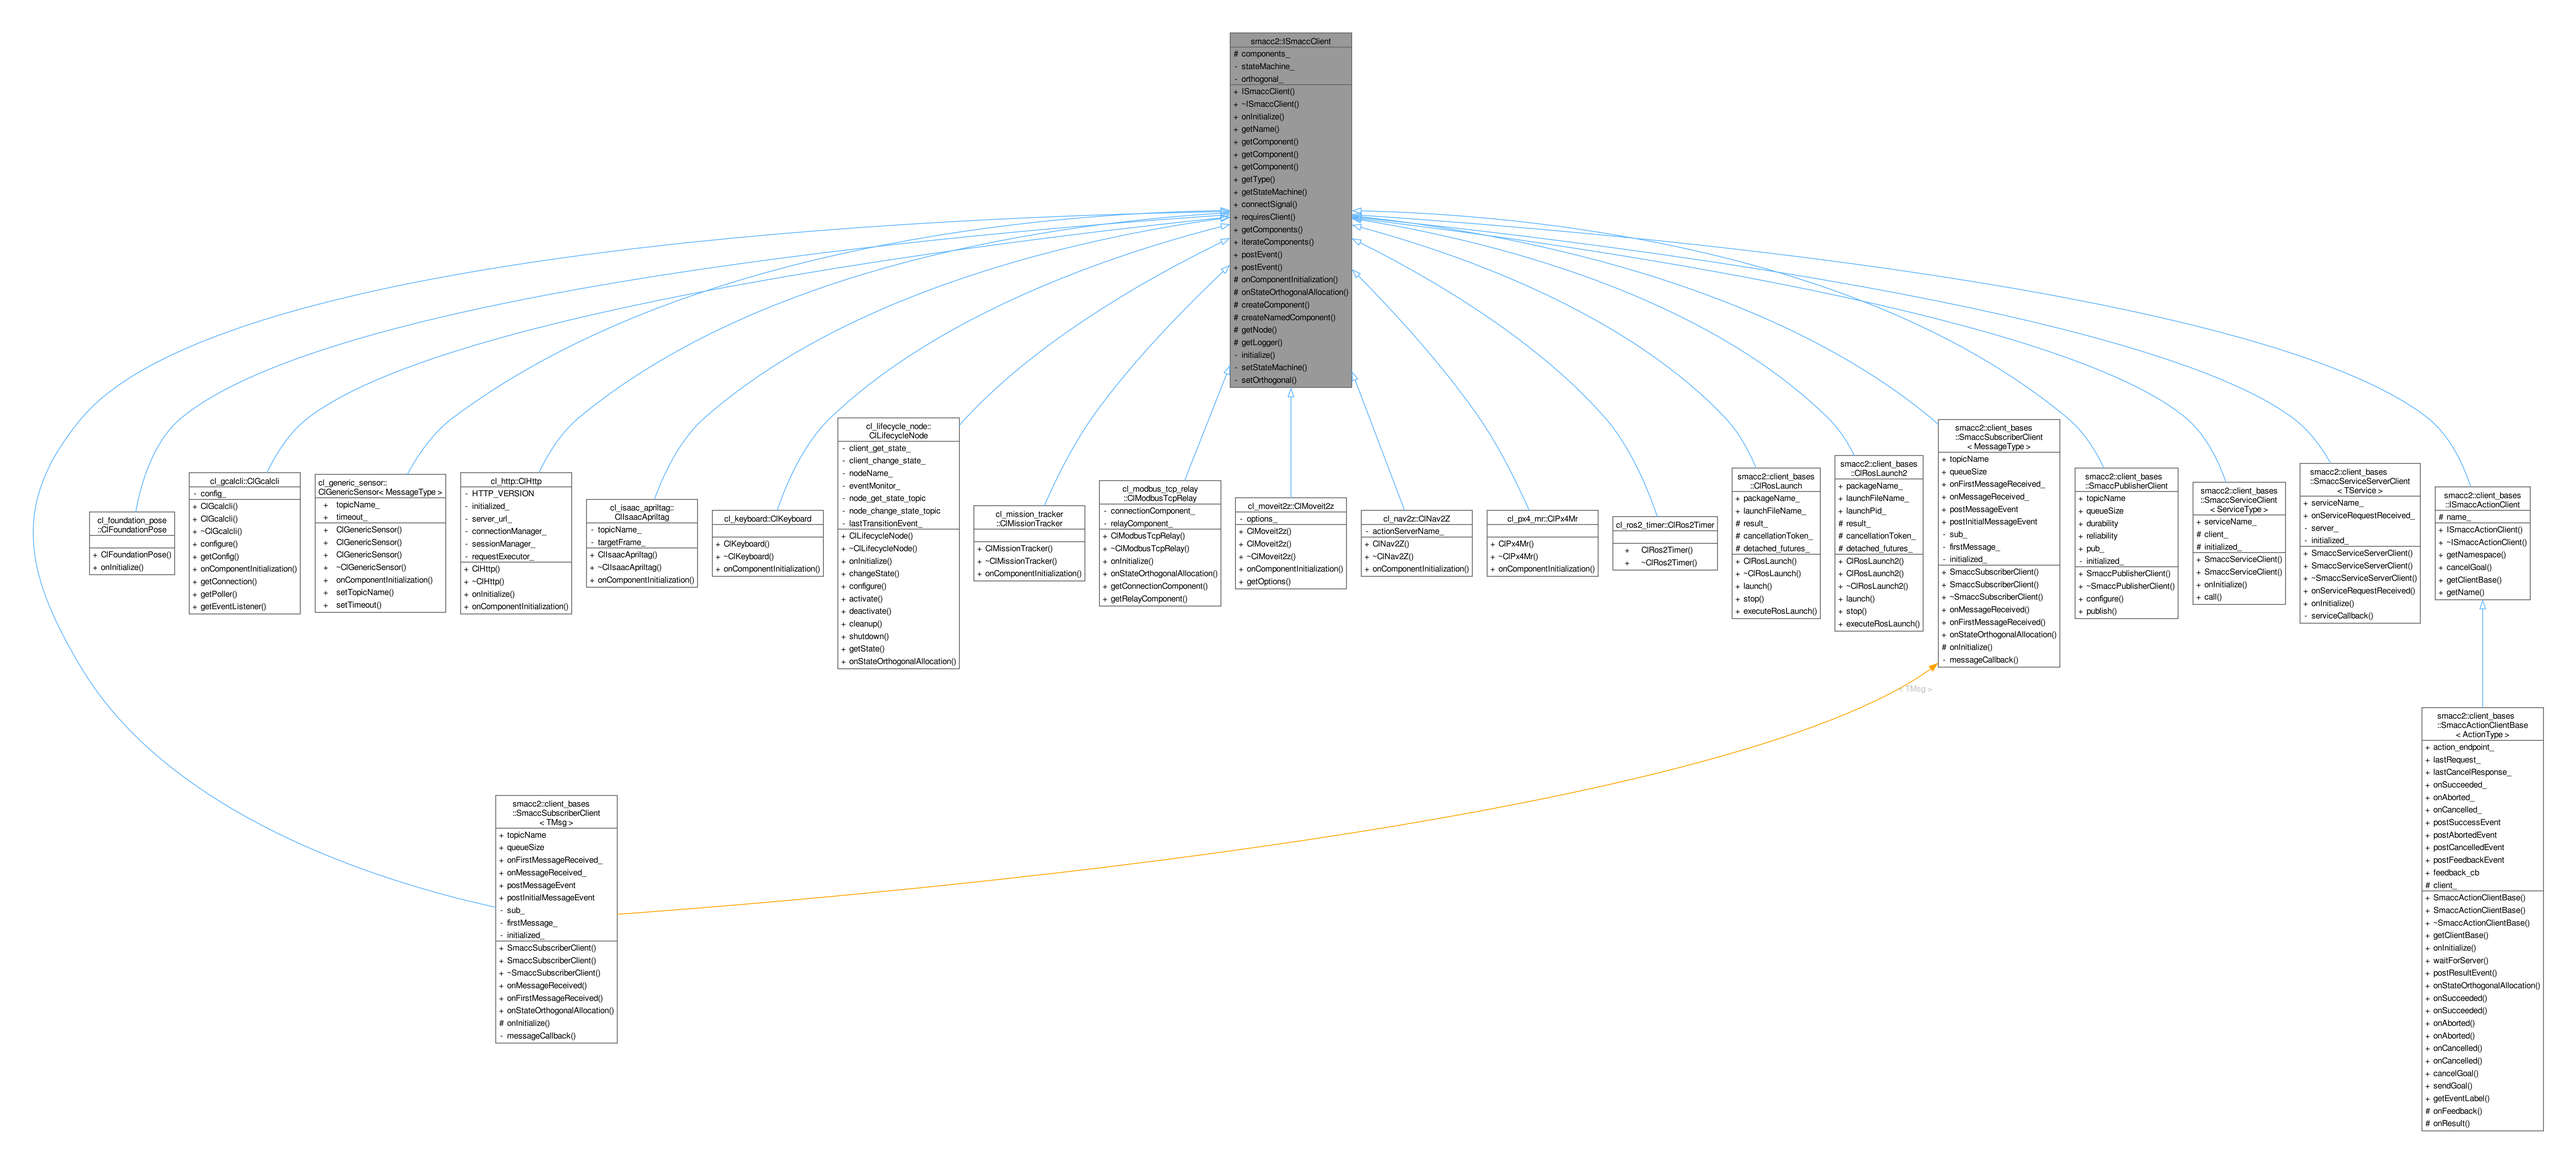
smacc2::ISmaccClient
# components_
- stateMachine_
- orthogonal_
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
cl_foundation_pose ::ClFoundationPose
+ ClFoundationPose()
+ onInitialize()
cl_gcalcli::ClGcalcli
- config_
+ ClGcalcli()
+ ClGcalcli()
+ ~ClGcalcli()
+ configure()
+ getConfig()
+ onComponentInitialization()
+ getConnection()
+ getPoller()
+ getEventListener()
cl_generic_sensor:: ClGenericSensor< MessageType >
+ topicName_
+ timeout_
+ ClGenericSensor()
+ ClGenericSensor()
+ ClGenericSensor()
+ ~ClGenericSensor()
+ onComponentInitialization()
+ setTopicName()
+ setTimeout()
cl_http::ClHttp
- HTTP_VERSION
- initialized_
- server_url_
- connectionManager_
- sessionManager_
- requestExecutor_
+ ClHttp()
+ ~ClHttp()
+ onInitialize()
+ onComponentInitialization()
cl_isaac_apriltag:: ClIsaacApriltag
- topicName_
- targetFrame_
+ ClIsaacApriltag()
+ ~ClIsaacApriltag()
+ onComponentInitialization()
cl_keyboard::ClKeyboard
+ ClKeyboard()
+ ~ClKeyboard()
+ onComponentInitialization()
cl_lifecycle_node:: ClLifecycleNode
- client_get_state_
- client_change_state_
- nodeName_
- eventMonitor_
- node_get_state_topic
- node_change_state_topic
- lastTransitionEvent_
+ ClLifecycleNode()
+ ~ClLifecycleNode()
+ onInitialize()
+ changeState()
+ configure()
+ activate()
+ deactivate()
+ cleanup()
+ shutdown()
+ getState()
+ onStateOrthogonalAllocation()
cl_mission_tracker ::ClMissionTracker
+ ClMissionTracker()
+ ~ClMissionTracker()
+ onComponentInitialization()
cl_modbus_tcp_relay ::ClModbusTcpRelay
- connectionComponent_
- relayComponent_
+ ClModbusTcpRelay()
+ ~ClModbusTcpRelay()
+ onInitialize()
+ onStateOrthogonalAllocation()
+ getConnectionComponent()
+ getRelayComponent()
cl_moveit2z::ClMoveit2z
- options_
+ ClMoveit2z()
+ ClMoveit2z()
+ ~ClMoveit2z()
+ onComponentInitialization()
+ getOptions()
cl_nav2z::ClNav2Z
- actionServerName_
+ ClNav2Z()
+ ~ClNav2Z()
+ onComponentInitialization()
cl_px4_mr::ClPx4Mr
+ ClPx4Mr()
+ ~ClPx4Mr()
+ onComponentInitialization()
cl_ros2_timer::ClRos2Timer
+ ClRos2Timer()
+ ~ClRos2Timer()
smacc2::client_bases ::ClRosLaunch
+ packageName_
+ launchFileName_
# result_
# cancellationToken_
# detached_futures_
+ ClRosLaunch()
+ ~ClRosLaunch()
+ launch()
+ stop()
+ executeRosLaunch()
smacc2::client_bases ::ClRosLaunch2
+ packageName_
+ launchFileName_
+ launchPid_
# result_
# cancellationToken_
# detached_futures_
+ ClRosLaunch2()
+ ClRosLaunch2()
+ ~ClRosLaunch2()
+ launch()
+ stop()
+ executeRosLaunch()
smacc2::client_bases ::SmaccSubscriberClient < MessageType >
+ topicName
+ queueSize
+ onFirstMessageReceived_
+ onMessageReceived_
+ postMessageEvent
+ postInitialMessageEvent
- sub_
- firstMessage_
- initialized_
+ SmaccSubscriberClient()
+ SmaccSubscriberClient()
+ ~SmaccSubscriberClient()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
# onInitialize()
- messageCallback()
smacc2::client_bases ::SmaccPublisherClient
+ topicName
+ queueSize
+ durability
+ reliability
+ pub_
- initialized_
+ SmaccPublisherClient()
+ ~SmaccPublisherClient()
+ configure()
+ publish()
smacc2::client_bases ::SmaccServiceClient < ServiceType >
+ serviceName_
# client_
# initialized_
+ SmaccServiceClient()
+ SmaccServiceClient()
+ onInitialize()
+ call()
smacc2::client_bases ::SmaccServiceServerClient < TService >
+ serviceName_
+ onServiceRequestReceived_
- server_
- initialized_
+ SmaccServiceServerClient()
+ SmaccServiceServerClient()
+ ~SmaccServiceServerClient()
+ onServiceRequestReceived()
+ onInitialize()
- serviceCallback()
smacc2::client_bases ::SmaccActionClient
# name_
+ ISmaccActionClient()
+ ~ISmaccActionClient()
+ getNamespace()
+ cancelGoal()
+ getClientBase()
+ getName()
smacc2::client_bases ::SmaccActionClientBase < ActionType >
+ action_endpoint_
+ lastRequest_
+ lastCancelResponse_
+ onSucceeded_
+ onAborted_
+ onCancelled_
+ postSuccessEvent
+ postAbortedEvent
+ postCancelledEvent
+ postFeedbackEvent
+ feedback_cb
# client_
+ SmaccActionClientBase()
+ SmaccActionClientBase()
+ ~SmaccActionClientBase()
+ getClientBase()
+ onInitialize()
+ waitForServer()
+ postResultEvent()
+ onStateOrthogonalAllocation()
+ onSucceeded()
+ onSucceeded()
+ onAborted()
+ onAborted()
+ onCancelled()
+ onCancelled()
+ cancelGoal()
+ sendGoal()
+ getEventLabel()
# onFeedback()
# onResult()
smacc2::client_bases ::SmaccSubscriberClient < TMsg >
+ topicName
+ queueSize
+ onFirstMessageReceived_
+ onMessageReceived_
+ postMessageEvent
+ postInitialMessageEvent
- sub_
- firstMessage_
- initialized_
+ SmaccSubscriberClient()
+ SmaccSubscriberClient()
+ ~SmaccSubscriberClient()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
# onInitialize()
- messageCallback()
< TMsg >