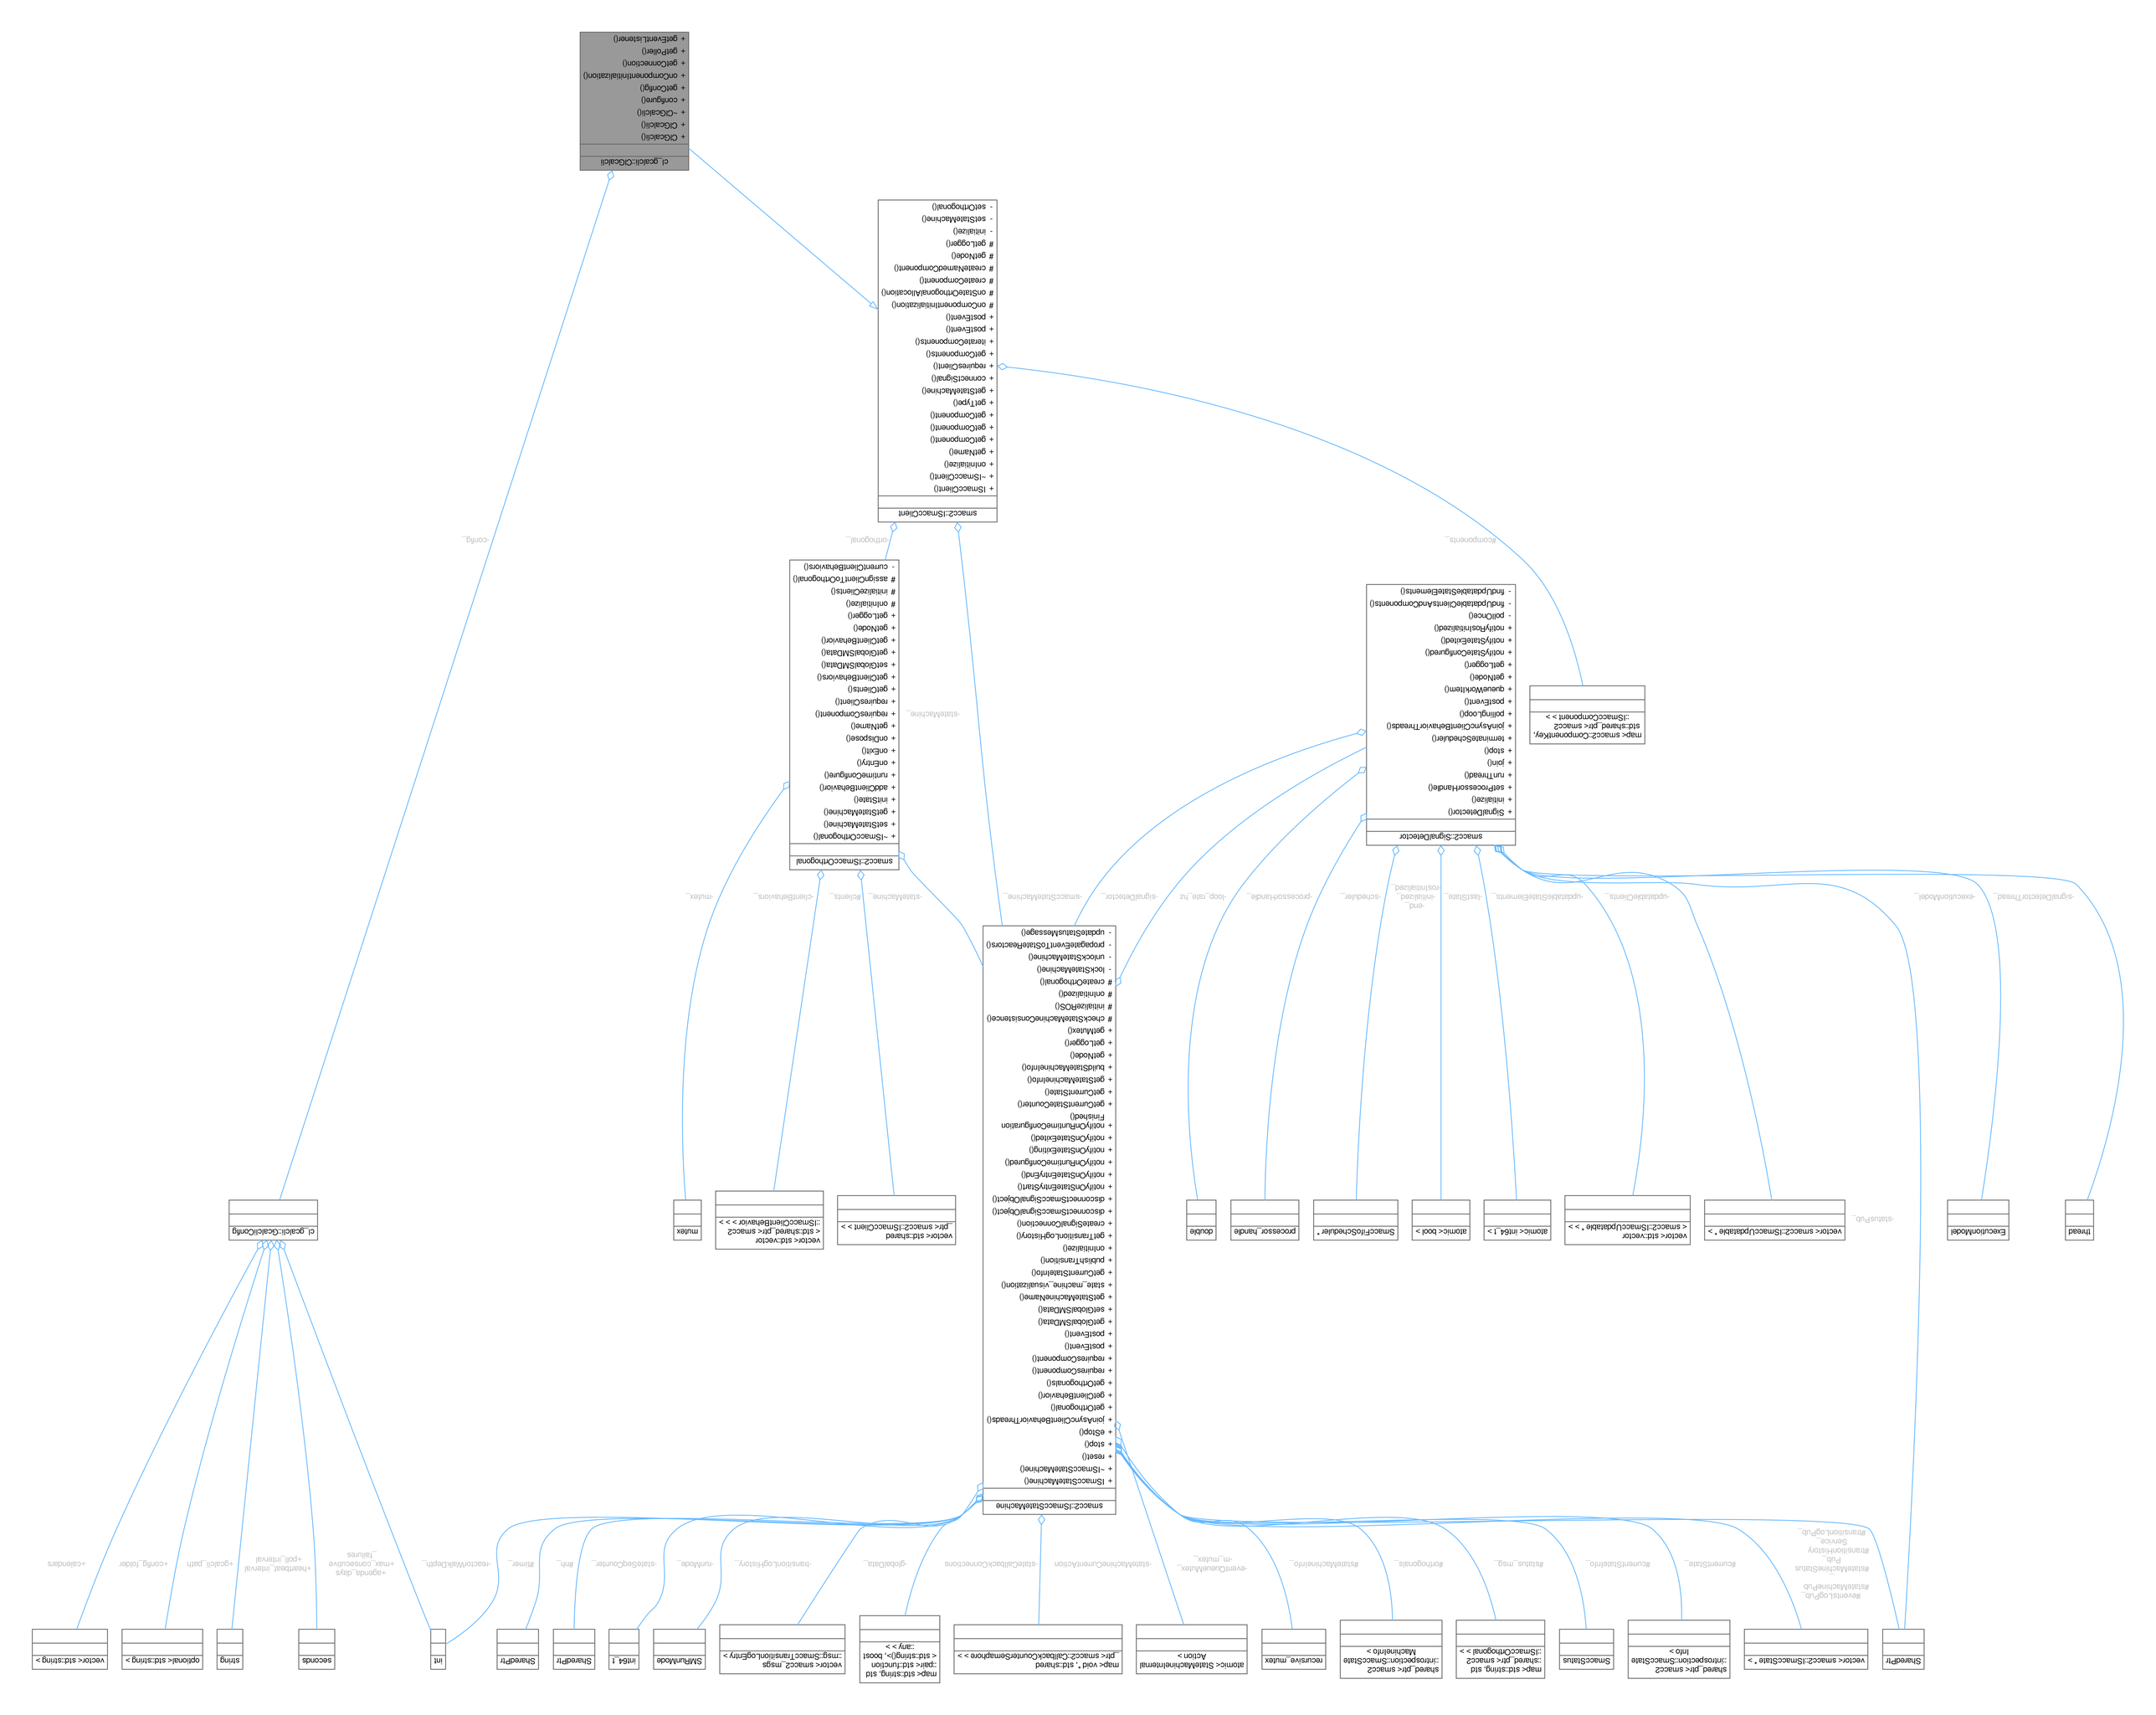
cl_gcalcli::GCalcli
+ GCalcli()
+ GCalcli()
+ ~GCalcli()
+ configure()
+ getConfig()
+ onComponentInitialization()
+ getConnection()
+ getPoller()
+ getEventListener()
cl_gcalcli::GCalcliConfig
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ iterateComponents()
+ postEvent()
+ postEvent()
+ postEvent()
+ onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ run Thread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ queueWorkItem()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyInitialized()
- pollOnce()
- findUpdatableStateAndComponents()
- findUpdatableStateElements()
map< smacc2::ComponentKey, std::shared_ptr< smacc2 ::ISmaccComponent > >
threadPtr
executionModel_
signalDetectorThread_
executionModel
vector< smacc2::ISmaccStateMachine * >
shared_ptr< smacc2 ::introspection::SmaccStateInfo >
SmaccStatus
map< std::string, std ::shared_ptr< smacc2 ::ISmaccOrthogonal > >
shared_ptr< smacc2 ::introspection::SmaccStateMachineInfo >
recursive_mutex
atomic< StateMachineInternal Action >
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
vector< smacc2_msgs ::msg::SmaccTransitionLogEntry >
map< std::string, std ::function< std::string() >, boost::any > >
SMFunMode
int64_t
SharedPtr
SharedPtr
int
seconds
string
optional< std::string >
vector< std::string >
#threadPool_
#eventLogPub_
#stateMachinePub_
#stateMachineStatus Pub_
#transitionHistory Service_
#transitionLogPub_
#currentStateInfo_
#currentState_
#status_msg_
#orthogonals_
#stateMachineInfo_
#eventQueueMutex_
-m_mutex_
-stateMachineCurrentAction
-stateCallBackConnections
-globalData_
-transitionLogHistory_
-unMode_
-stateSeqCounter_
#hh_
#timer_
-reactorWalkDepth_
+agenda_days +max_consecutive _failures
+heartbeat_interval +poll_interval
+gcalcli_path
+config_folder
+calendars
-stateMachine_
-clientBehaviors_
-mutex_
-orthogonal_
-config_
#components_
vector< std::shared_ptr< smacc2 ::ISmaccClientBehavior > >
mutex
vector< std::shared_ptr< smacc2 ::ISmaccClient > >
double
processor_handle
SmaccFifoScheduler *
atomic< bool >
atomic< int64_t >
vector< std::shared_ptr< smacc2::ISmaccUpdatable * > >
vector< smacc2::ISmaccUpdatable * >
-statusPub_
ExecutionModel
thread