


smacc2::ISmaccOrthogonal
::onDispose

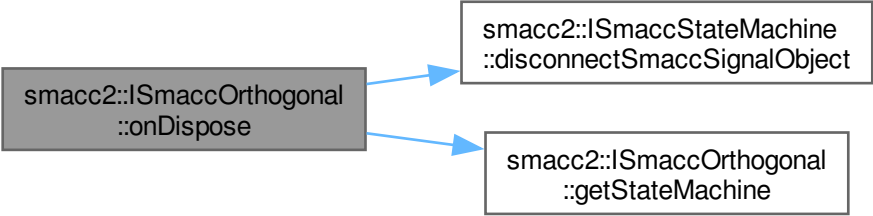

```
graph LR; A[smacc2::ISmaccOrthogonal::onDispose] --> B[smacc2::ISmaccStateMachine::disconnectSmaccSignalObject]; A --> C[smacc2::ISmaccOrthogonal::getStateMachine];
```

The diagram illustrates a call from the `smacc2::ISmaccOrthogonal::onDispose` method to two other methods. The source method is in a grey box on the left. Two blue arrows point from its right side to two white boxes on the right. The top arrow points to `smacc2::ISmaccStateMachine::disconnectSmaccSignalObject`, and the bottom arrow points to `smacc2::ISmaccOrthogonal::getStateMachine`.

smacc2::ISmaccStateMachine
::disconnectSmaccSignalObject

smacc2::ISmaccOrthogonal
::getStateMachine