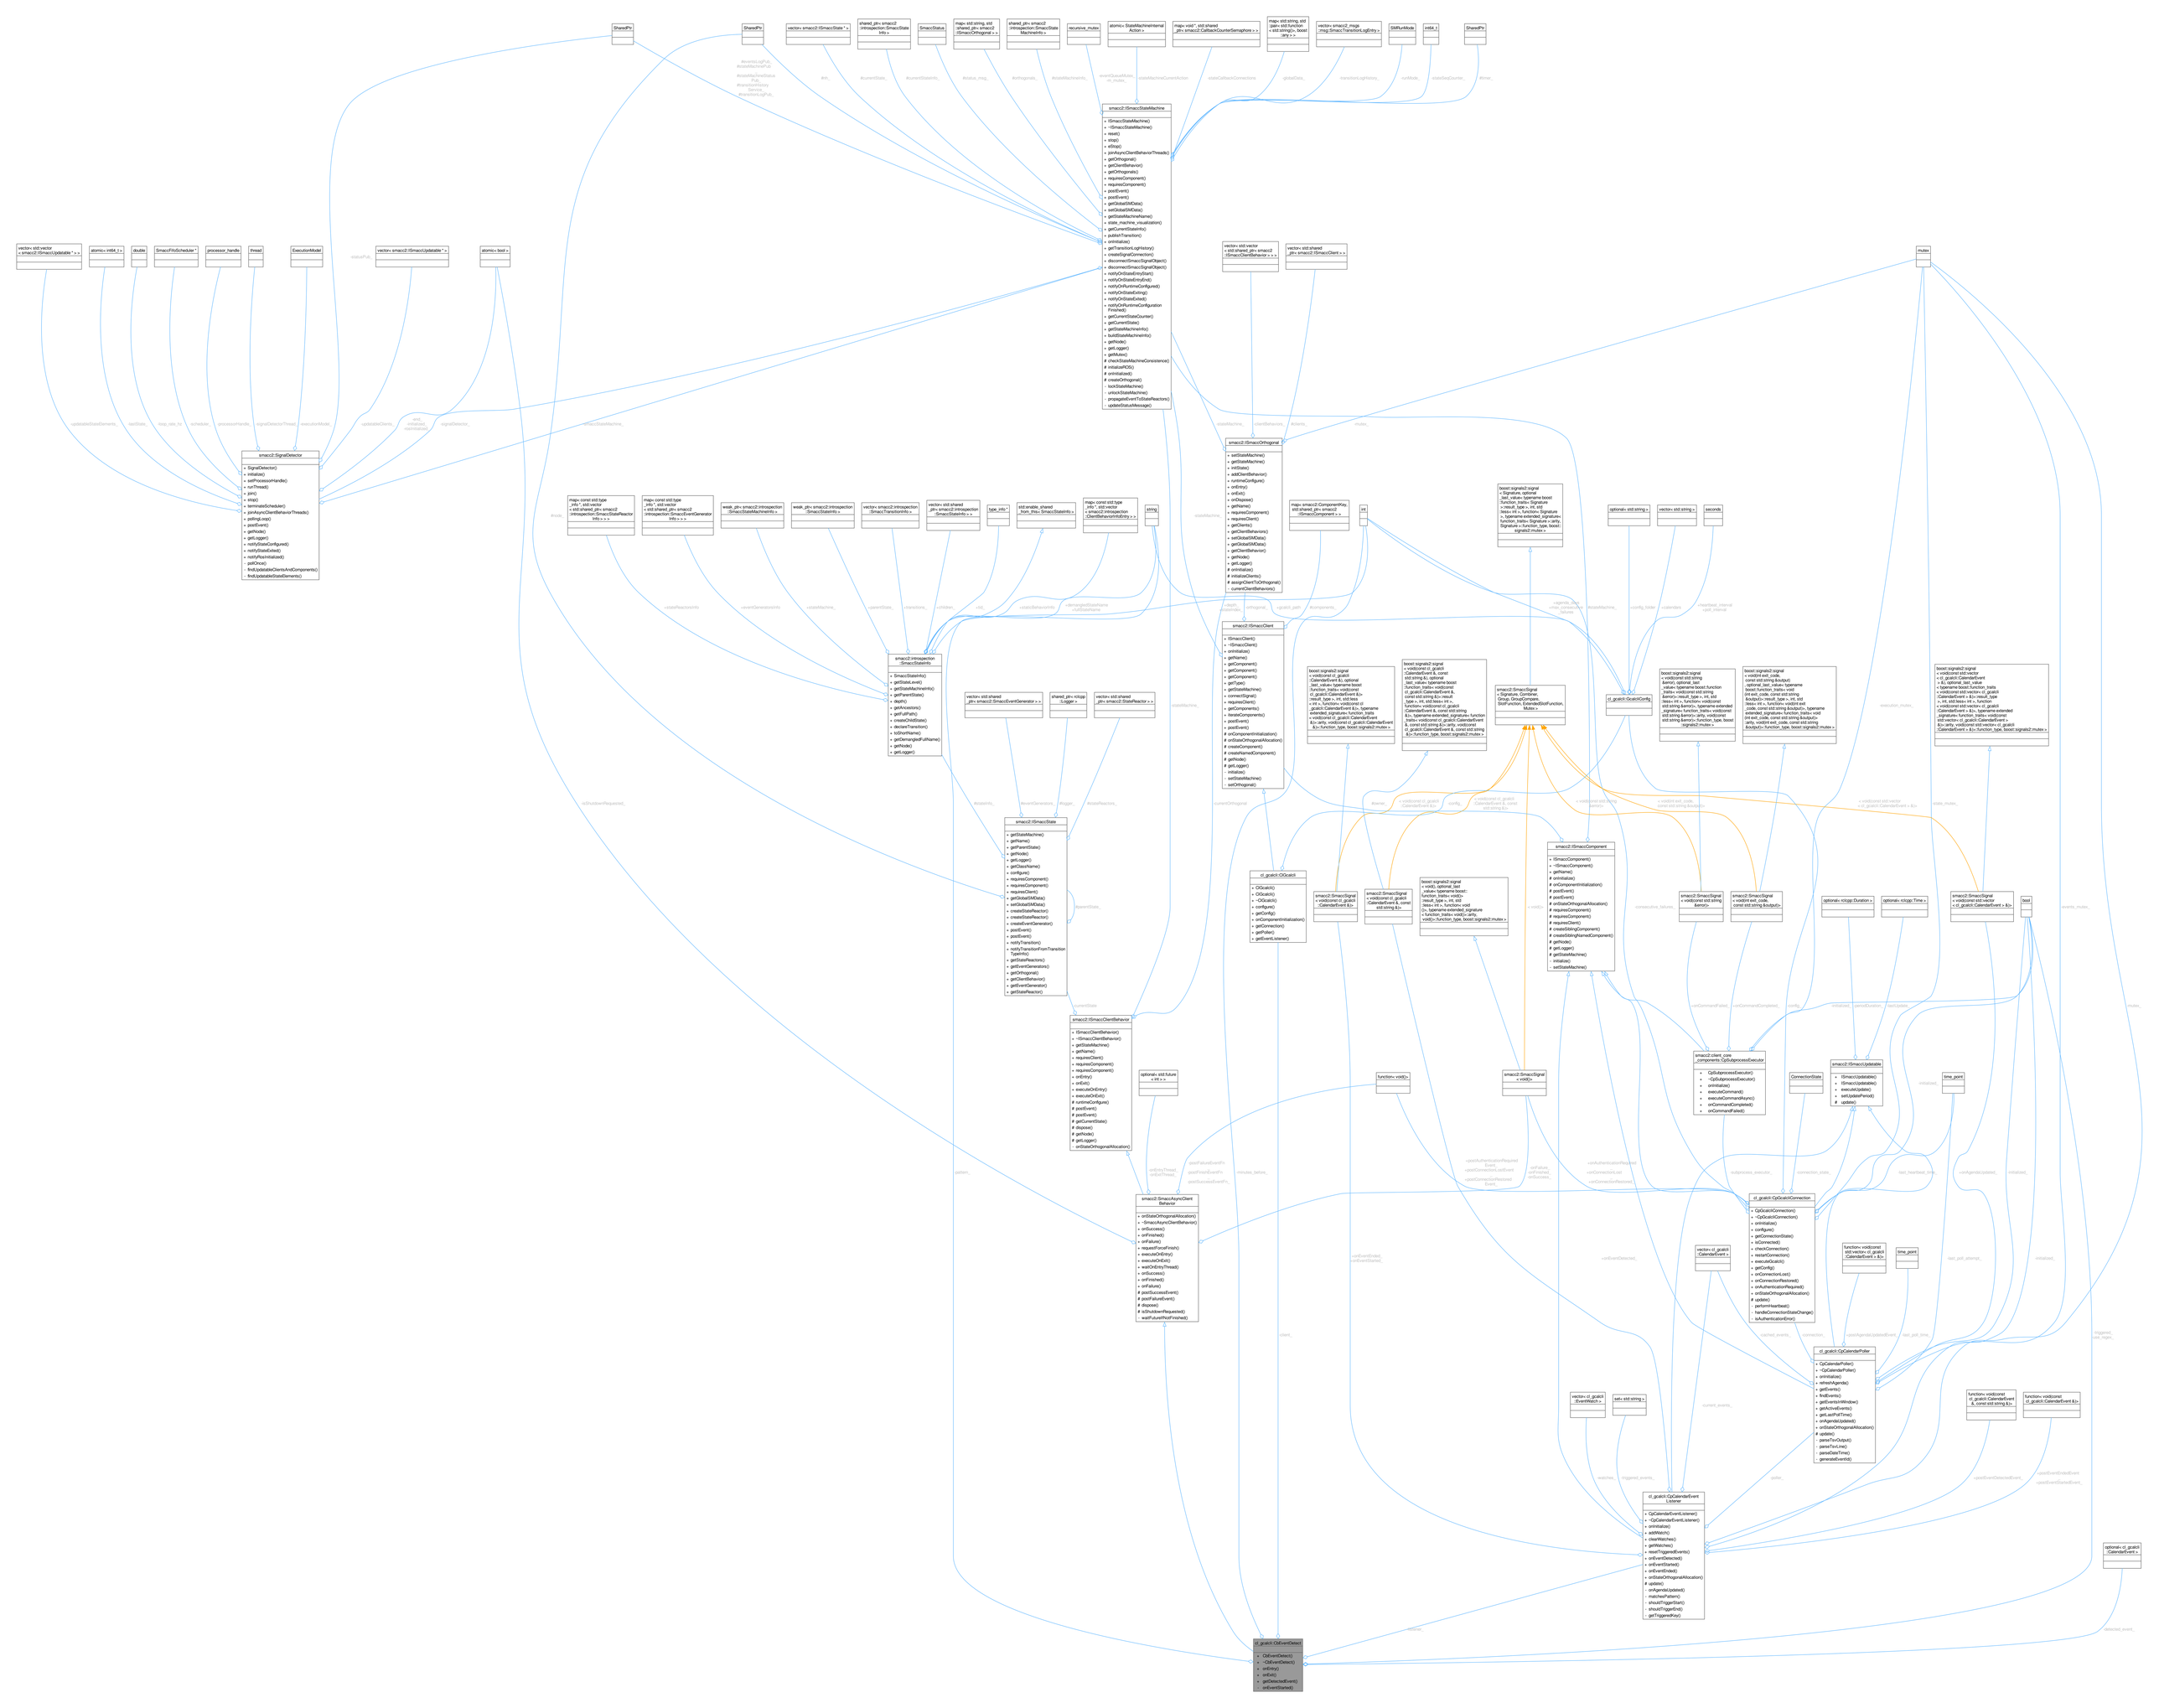
vector< std::vector
< smacc2::ISmaccUpdatable* > >
atomic< int64_t >
double
SmaccFifoScheduler*
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable* >
atomic< bool >
SharedPtr
SharedPtr
vector< smacc2::ISmaccState* >
shared_ptr< smacc2
::introspection::SmaccState
Info >
SmaccStatus
map< std::string, std
::shared_ptr< smacc2
::ISmaccOrthogonal* >
shared_ptr< smacc2
::introspection::SmaccState
MachineInfo >
recursive_mutex
atomic< StateMachineInternal
Action >
map< void*, std::shared
_ptr< smacc2::CallbackCounterSemaphore > >
map< std::string, std
::pair< std::function
< std::string()>, boost
::any > >
vector< smacc2_msgs
::msg::SmaccTransitionLogEntry >
SMRunMode
int64_t
SharedPtr
smacc2::ISmaccStateMachine
+ ISmaccStateMachine()
+ ~ISmaccStateMachine()
+ reset()
+ stop()
+ eStop()
+ joinAsyncClientBehaviorThreads()
+ getOrthogonal()
+ getClientBehavior()
+ getOrthogonals()
+ requiresComponent()
+ requiresComponent()
+ postEvent()
+ postEvent()
+ getGlobalSMData()
+ setGlobalSMData()
+ getStateMachineName()
+ state_machine_visualization()
+ getCurrentStateInfo()
+ publishTransition()
+ onInitialize()
+ getTransitionLogHistory()
+ createSignalConnection()
+ disconnectSmaccSignalObject()
+ disconnectSmaccSignalObject()
+ notifyOnStateEntryStart()
+ notifyOnStateEntryEnd()
+ notifyOnRuntimeConfigured()
+ notifyOnStateExiting()
+ notifyOnStateExited()
+ notifyOnRuntimeConfiguration
_Finished()
+ getCurrentStateCounter()
+ getCurrentState()
+ getStateMachineInfo()
+ buildStateMachineInfo()
+ getNode()
+ getLogger()
+ getMutex()
# checkStateMachineConsistence()
# initializeROS()
# onInitialized()
# createOrthogonal()
- lockStateMachine()
- unlockStateMachine()
- propagateEventToStateReactors()
- updateStatusMessage()
vector< std::vector
< std::shared_ptr< smacc2
::ISmaccClientBehavior > > >
vector< std::shared
_ptr< smacc2::ISmaccClient > >
mutex
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()
smacc2::ISmaccOrthogonal
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ runtimeConfigure()
+ onEntry()
+ onExit()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ setGlobalSMData()
+ getGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccStateReactor
Info > > >
map< const std::type
_info *, std::vector
< std::shared_ptr< smacc2
::introspection::SmaccEventGenerator
Info > > >
weak_ptr< smacc2::introspection
::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection
::SmaccStateInfo >
vector< smacc2::introspection
::SmaccTransitionInfo >
vector< std::shared
_ptr< smacc2::introspection
::SmaccStateInfo* > >
type_info *
std::enable_shared
_from_this< SmaccStateInfo >
map< const std::type
_info *, std::vector
< smacc2::introspection
::SmaccClientBehaviorInfo*>* >
string
map< smacc2::ComponentKey,
std::shared_ptr< smacc2
::ISmaccComponent > >
int
boost::signals2::signal
< R(Signature, combiner,
group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex) >
optional< std::string >
vector< std::string >
seconds
smacc2::introspection
::SmaccStateInfo
+ SmaccStateInfo()
+ getStateLevel()
+ getStateMachineInfo()
+ getParentState()
+ depth()
+ getAncestors()
+ getFullPath()
+ createChildState()
+ declareTransition()
+ toShortName()
+ getDemangledFullName()
+ getNode()
+ getLogger()
vector< std::shared
_ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp
::Logger >
vector< std::shared
_ptr< smacc2::SmaccReactor > >
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ onInitialize()
+ getName()
+ getComponent()
+ getComponent()
+ getComponent()
+ getType()
+ getStateMachine()
+ connectSignal()
+ requiresClient()
+ getComponents()
+ llenarComponents()
+ postEvent()
+ postEvent()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# createComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
cl_gcalcli::GCalendarConfig
boost::signals2::signal
< void(const cl_gcalcli
::CalendarEvent &)>
boost::signals2::signal
< void(const cl_gcalcli
::CalendarEvent &, const
std::string &)>
smacc2::SmaccSignal
< Signature, Combiner,
Group, GroupCompare,
SlotFunction, ExtendedSlotFunction,
Mutex >
boost::signals2::signal
< void(const std::string
&error)>
boost::signals2::signal
< void(const std::string
&error), optional_last
_value< typename boost
::function_traits< void
(int exit_code, const std::string
&output)>::result_type >, int, std
::less< int >, function< void(int exit
_code, const std::string &output)>, typename
extended_signature< function_traits< void
(int exit_code, const std::string &output)>
::arity, void(int exit_code, const std::string
&output)>::function_type, boost::signals2::mutex >
boost::signals2::signal
< void(const std::string
&error), optional_last
_value< typename boost
::function_traits< void
(std::string &error)>::result_type >, int, std
::less< int >, function< void(std::string
&error)>, typename extended
_signature< function_traits< void
(std::string &error)>::arity, void(std::string
&error)>::function_type, boost
::signals2::mutex >
boost::signals2::signal
< void(const std::string
&output), optional_last
_value< typename boost
::function_traits< void
(int exit_code, const std::string
&output)>::result_type >, int, std
::less< int >, function< void(int exit
_code, const std::string &output)>, typename
extended_signature< function_traits< void
(int exit_code, const std::string &output)>
::arity, void(int exit_code, const std::string
&output)>::function_type, boost::signals2::mutex >
boost::signals2::signal
< void(const std::vector
< cl_gcalcli::CalendarEvent
> &), optional_last_value
< typename boost::function_traits
< void(const std::vector< cl_gcalcli
::CalendarEvent > &)>::result_type
>, int, std::less< int >, function
< void(const std::vector< cl_gcalcli
::CalendarEvent > &)>, typename extended
_signature< function_traits< void(const
std::vector< cl_gcalcli::CalendarEvent >
&)>::arity, void(const std::vector< cl_gcalcli
::CalendarEvent > &)>::function_type, boost::signals2::mutex >
smacc2::ISmaccState
+ getStateMachine()
+ getName()
+ getParentState()
+ getNode()
+ getLogger()
+ getClassName()
+ configure()
+ requiresComponent()
+ requiresComponent()
+ requiresClient()
+ getGlobalSMData()
+ setGlobalSMData()
+ createStateReactor()
+ createStateReactor()
+ createEventGenerator()
+ postEvent()
+ postEvent()
+ notifyTransition()
+ notifyTransitionFromTransition
TypeInfo()
+ getStateReactors()
+ getEventGenerators()
+ getOrthogonal()
+ getClientBehavior()
+ getEventGenerator()
+ getStateReactor()
cl_gcalcli::GCalcli
+ GCalcli()
+ GCalcli()
+ ~GCalcli()
+ configure()
+ getConfig()
+ onComponentInitialization()
+ getConnection()
+ getPollset()
+ getEventLisitener()
smacc2::SmaccSignal
< void(const cl_gcalcli
::CalendarEvent &)>
smacc2::SmaccSignal
< void(const cl_gcalcli
::CalendarEvent &, const
std::string &)>
boost::signals2::signal
< void(), optional_last
_value< typename boost
::function_traits< void()>
::result_type >, int, std
::less< int >, function< void
()>, typename extended_signature
< function_traits< void()>::arity,
void()>::function_type, boost::signals2::mutex >
smacc2::SmaccSignal
< void(const std::string
&error)>
smacc2::SmaccSignal
< void(int exit_code,
const std::string &output)>
optional< rclcpp::Duration >
optional< rclcpp::Time >
smacc2::SmaccSignal
< void(const std::vector
< cl_gcalcli::CalendarEvent > &)>
bool
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ getName()
# onInitialize()
# onComponentInitialization()
# postEvent()
# postEvent()
# onStateOrthogonalAllocation()
# requiresComponent()
# requiresComponent()
# requiresClient()
# createSiblingComponent()
# createSiblingNamedComponent()
# getNode()
# getLogger()
# getStateMachine()
- initialize()
- setStateMachine()
smacc2::ISmaccClientBehavior
+ ISmaccClientBehavior()
+ ~ISmaccClientBehavior()
+ getStateMachine()
+ getName()
+ requiresClient()
+ requiresComponent()
+ requiresComponent()
+ onEntry()
+ onExit()
+ executeOnEntry()
+ executeOnExit()
# runtimeConfigure()
# postEvent()
# postEvent()
# getCurrentState()
# dispose()
# getNode()
# getLogger()
- onStateOrthogonalAllocation()
optional< std::future
< int8_t > >
function< void()>
smacc2::SmaccSignal
< void()>
smacc2::client_core
_components::CpSubprocessExecutor
+ CpSubprocessExecutor()
+ ~CpSubprocessExecutor()
+ onInitialize()
+ executeCommand()
+ executeCommandAsync()
+ onCommandCompleted()
+ onCommandFailed()
ConnectionState
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
time_point
smacc2::SmaccAsyncClient
Behavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureNotFinished()
cl_gcalcli::CpGcalcliConnection
+ CpGcalcliConnection()
+ ~CpGcalcliConnection()
+ onInitialize()
+ configure()
+ getConnectionState()
+ isConnected()
+ checkConnection()
+ restartConnection()
+ executeGcalcli()
+ getConfig()
+ onConnectionLost()
+ onConnectionRestored()
+ onAuthenticationRequired()
+ onStateOrthogonalAllocation()
# update()
- performHeartbeat()
- handleConnectionStateChange()
- isAuthenticationError()
vector< cl_gcalcli
::CalendarEvent >
function< void(const
std::vector< cl_gcalcli
::CalendarEvent > &)>
time_point
cl_gcalcli::CpCalendarPoller
+ CpCalendarPoller()
+ ~CpCalendarPoller()
+ onInitialize()
+ refreshAgenda()
+ getEvents()
+ findEvents()
+ getEventsInWindow()
+ getActiveEvents()
+ getLastPollTime()
+ onAgendaUpdated()
# onStateOrthogonalAllocation()
# update()
- parseTsvOutput()
- parseTsvLine()
- parseDateTime()
- generateEventId()
vector< cl_gcalcli
::EventWatch >
set< std::string >
cl_gcalcli::CpCalendarEvent
Listener
+ CpCalendarEventListener()
+ ~CpCalendarEventListener()
+ onInitialize()
+ addWatch()
+ clearWatches()
+ getWatches()
+ resetTriggeredEvents()
+ onEventDetected()
+ onEventStarted()
+ onEventEnded()
+ onStateOrthogonalAllocation()
# update()
- onAgendaUpdated()
- matchesPattern()
- shouldTriggerStart()
- shouldTriggerEnd()
- getTriggeredKey()
function< void(const
cl_gcalcli::CalendarEvent
&, const std::string &)>
function< void(const
cl_gcalcli::CalendarEvent &)>
optional< cl_gcalcli
::CalendarEvent >
cl_gcalcli::ClEventDetect
+ ClEventDetect()
+ ~ClEventDetect()
+ onEntry()
+ onExit()
+ getDetectedEvent()
- onEventStarted()