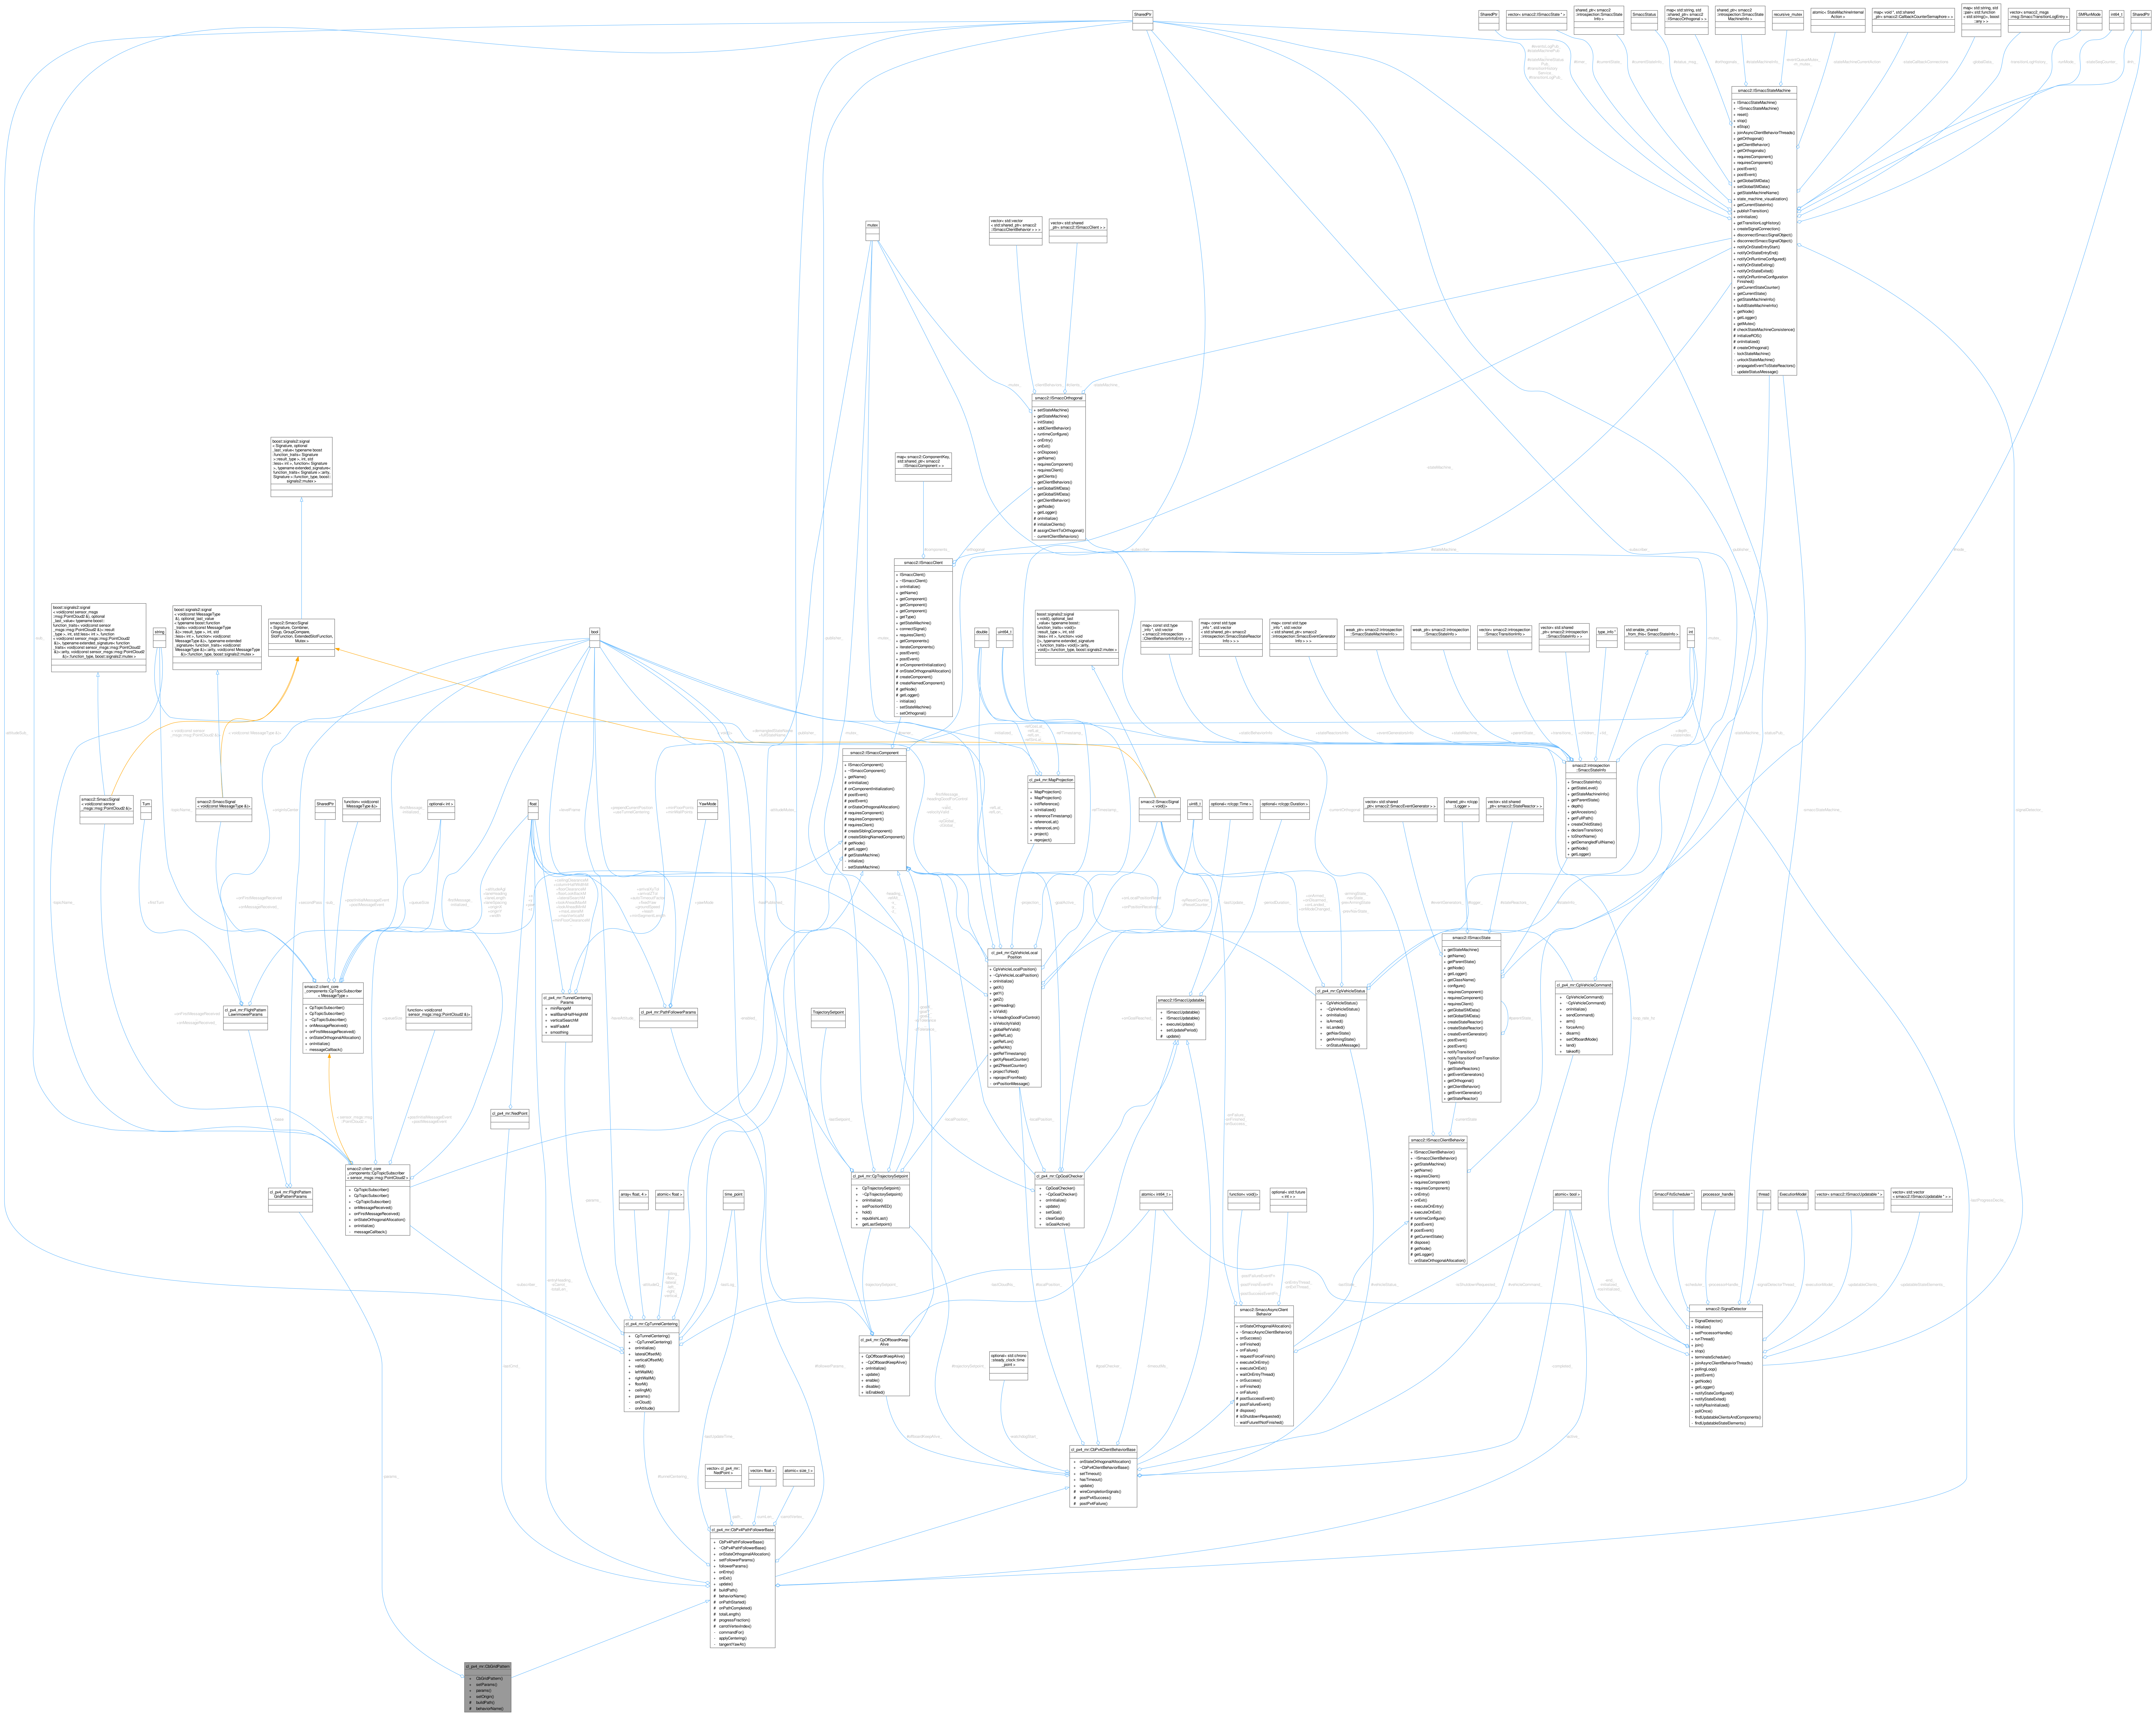
cl_px4_mr::CbGridPattern
+ CbGridPattern()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
-lastUpdateTime_
#tunnelCentering_
#followerParams_
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#goalChecker_
-timeoutMs_
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
array< float, 4 >
atomic< float >
time_point
-params_
-attitudeQ_
-ceiling_
-floor_
-lateral_
-left_
-right_
-vertical_
-lastLog_
-entryHeading_
-sCarrot_
-totalLen_
-subscriber_
-haveAttitude_
-enabled_
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
-lastSetpoint_
-trajectorySetpoint_
cl_px4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
smacc2::client_core_components::CpTopicSubscriber< MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
< sensor_msgs::msg::PointCloud2 >
+queueSize
function< void(const sensor_msgs::msg::PointCloud2 &)>
+postInitialMessageEvent
+postMessageEvent
cl_px4_mr::FlightPatternLawnmowerParams
+onFirstMessageReceived_
+onMessageReceived_
+base
cl_px4_mr::FlightPatternGridPatternParams
cl_px4_mr::NedPoint
cl_px4_mr::TunnelCenteringParams
+ minRangeM
+ wallBandHalfHeightM
+ verticalSearchM
+ wallFadeM
+ smoothing
+lookAheadMinM
+maxLateralM
+maxVerticalM
+minFloorClearanceM
...
cl_px4_mr::PathFollowerParams
+groundSpeed
+leash
+minSegmentLength
+originX
+originY
+width
+z