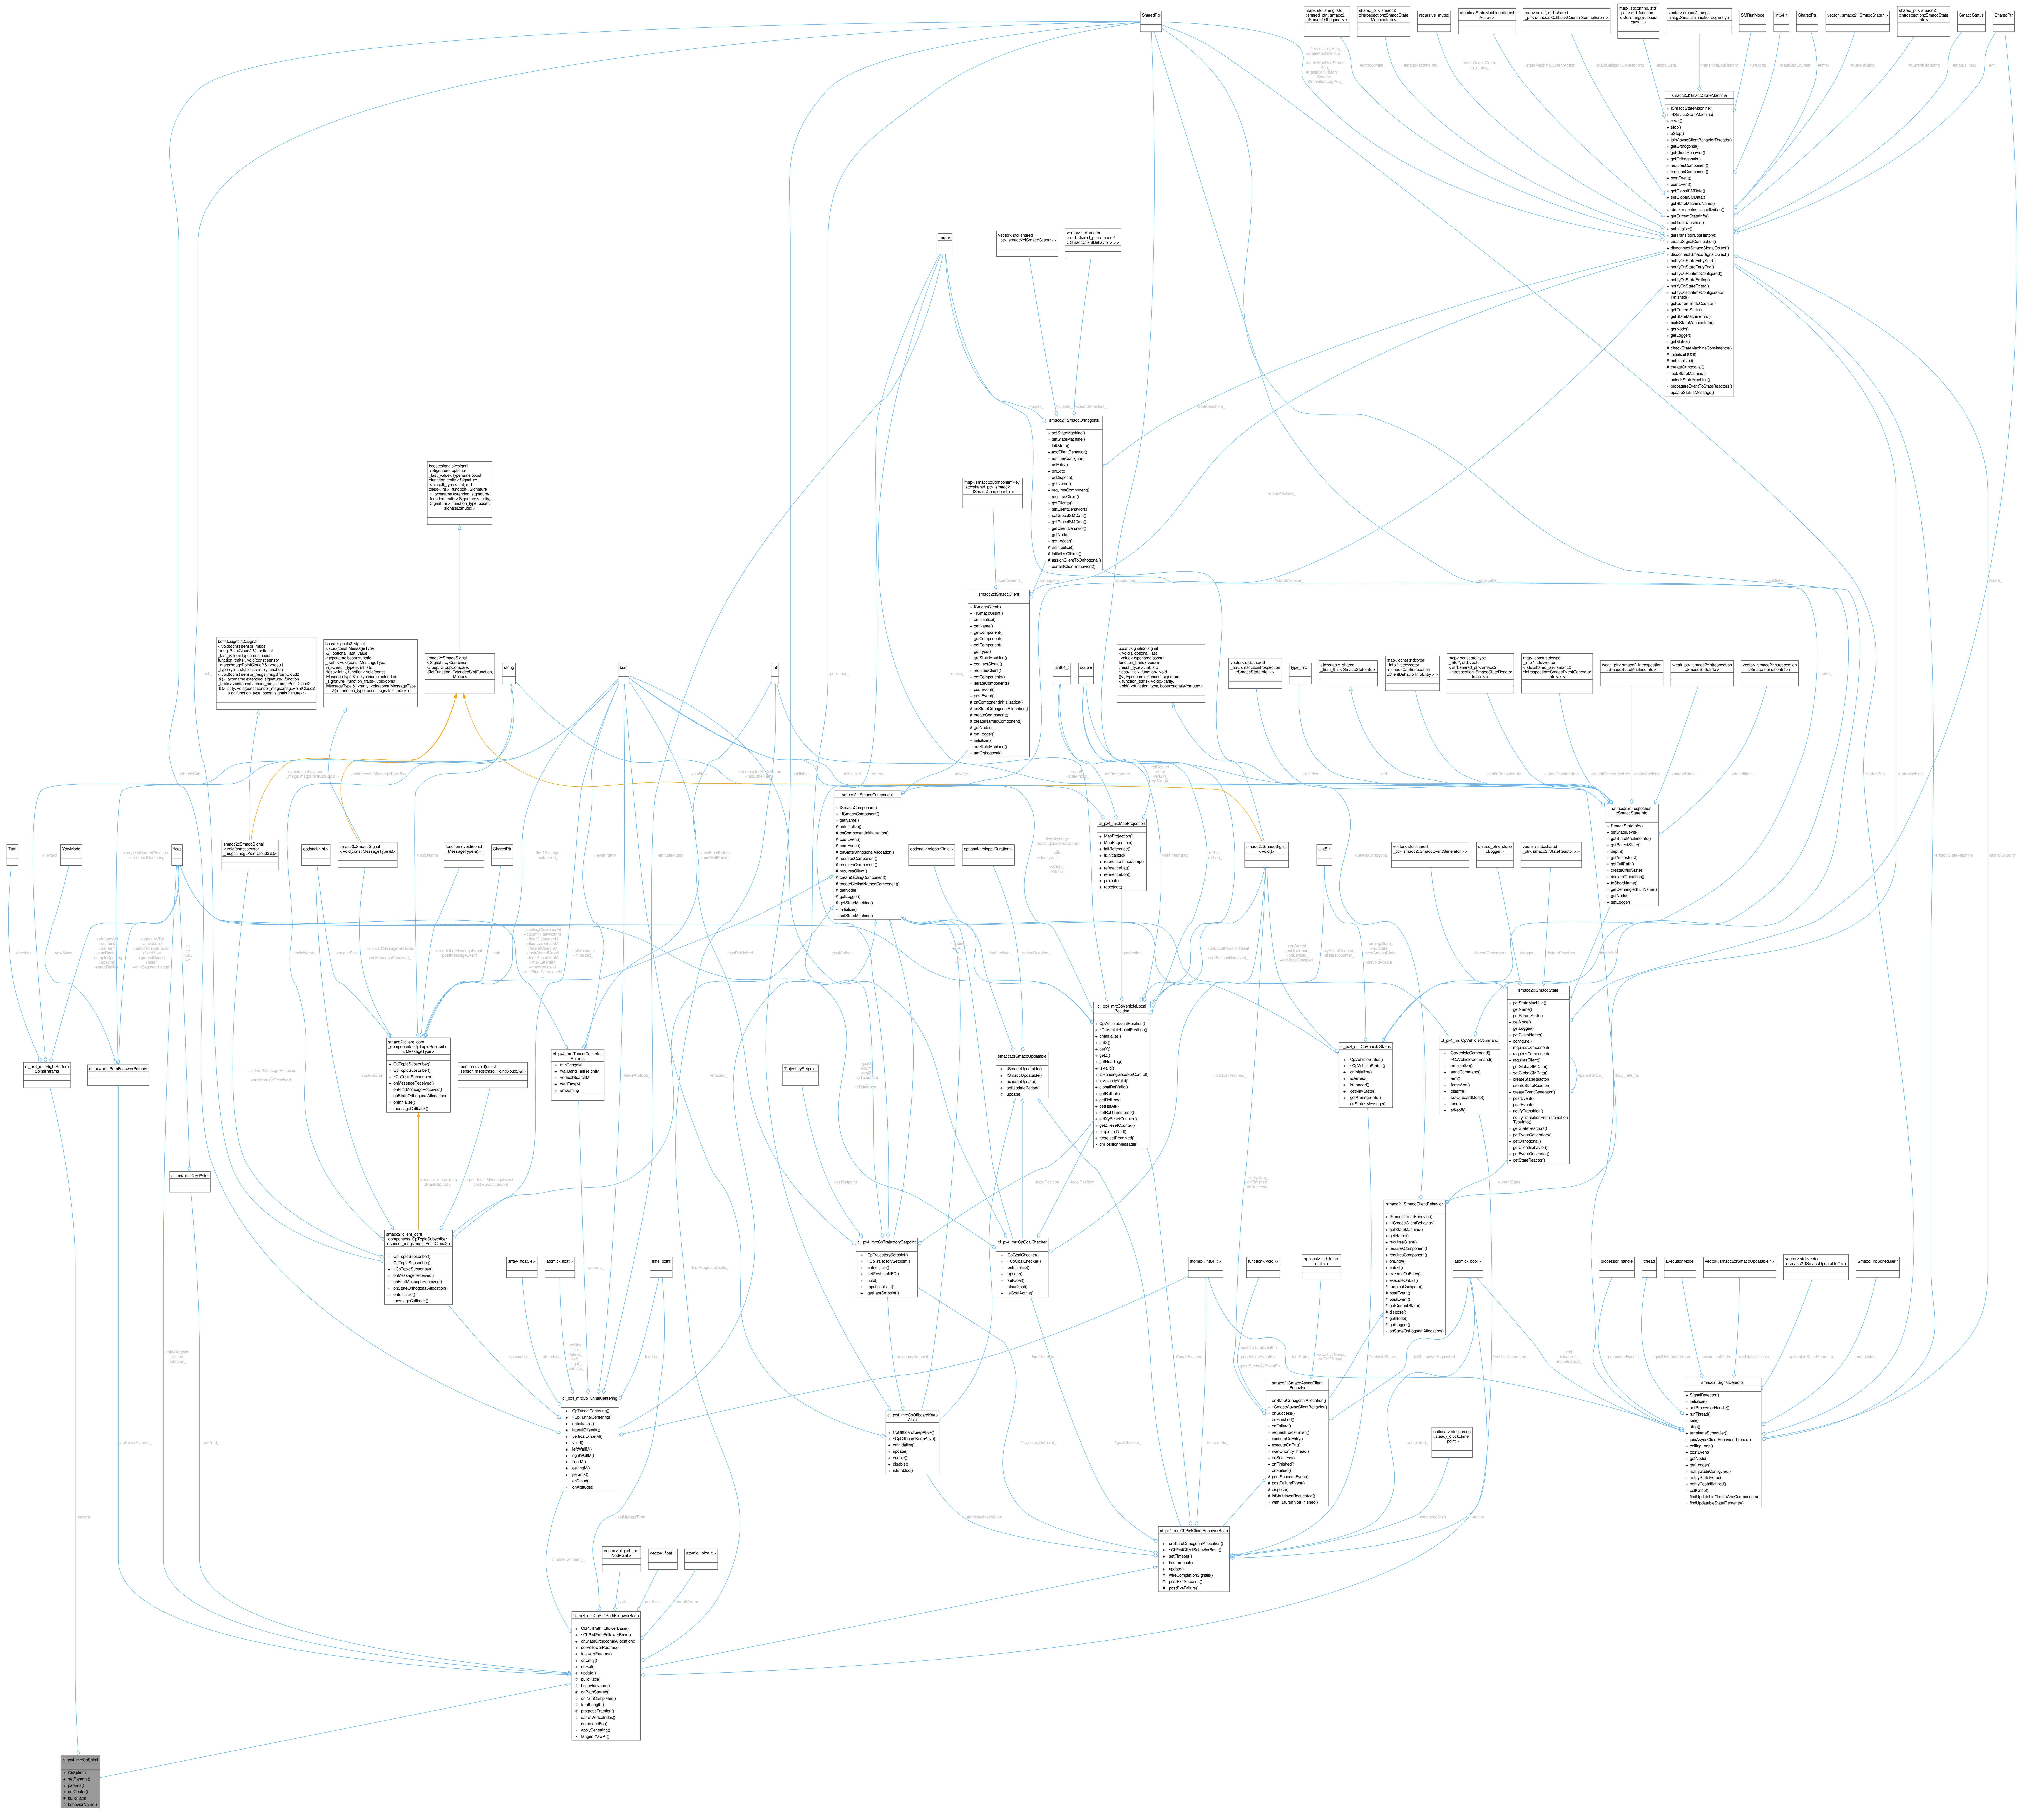
cl_px4_mr::CbSpiral
+ CbSpiral()
+ setParams()
+ params()
+ setCenter()
# buildPath()
# behaviorName()
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
vector< cl_px4_mr::NedPoint >
vector< float >
-path_
-cumLen_
-lastUpdateTime_
#tunnelCentering_
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
+ ~CpTunnelCentering()
+ onInitialize()
+ lateralOffsetM()
+ verticalOffsetM()
+ valid()
+ leftWallM()
+ rightWallM()
+ floorM()
+ ceilingM()
+ params()
- onCloud()
- onAttitude()
-attitudeQ_
-ceiling_
-floor_
-lateral_
-left_
-right_
-vertical_
-lastLog_
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#goalChecker_
-timeoutMs_
cl_px4_mr::FlightPatternSpiralParams
cl_px4_mr::PathFollowerParams
+startRadius
+minSegmentLength
cl_px4_mr::NedPoint
cl_px4_mr::CpTrajectorySetpoint
cl_px4_mr::CpGoalChecker
cl_px4_mr::CpOffboardKeepAlive
cl_px4_mr::CpVehicleLocalPosition
cl_px4_mr::CpVehicleStatus
cl_px4_mr::CpVehicleCommand
cl_px4_mr::MapProjection
cl_px4_mr::TunnelCenteringParams
smacc2::SmaccAsyncClientBehavior
smacc2::ISmaccClientBehavior
smacc2::ISmaccState
smacc2::ISmaccStateMachine
smacc2::ISmaccOrthogonal
smacc2::ISmaccClient
smacc2::ISmaccComponent
smacc2::ISmaccUpdatable
smacc2::SignalDetector
smacc2::introspection::SmaccStateInfo
smacc2::client_core_components::CpTopicSubscriber< MessageType >
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
SharedPtr
mutex
bool
int
float
string
double
uint8_t
Turn
YawMode