


```
boost::statechart::  
event< EvActionCancelled  
< TSource, TOrthogonal > >
```

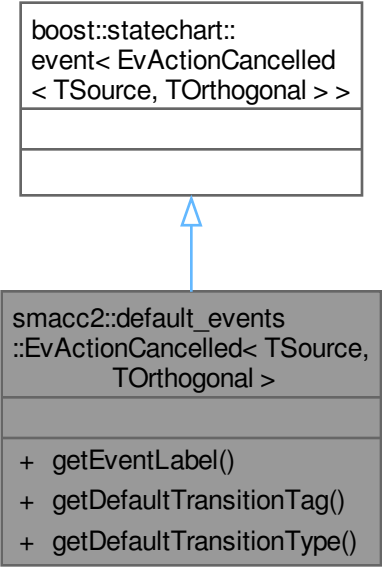

The diagram shows two class boxes. The top box is white with a black border and contains the text 'boost::statechart::event< EvActionCancelled < TSource, TOrthogonal > >'. The bottom box is gray with a black border and contains the text 'smacc2::default_events ::EvActionCancelled< TSource, TOrthogonal >' followed by three methods: '+ getEventLabel()', '+ getDefaultTransitionTag()', and '+ getDefaultTransitionType()'. A blue arrow points from the bottom box to the top box, indicating inheritance.

```
smacc2::default_events  
::EvActionCancelled< TSource,  
TOrthogonal >
```

```
+ getEventLabel()  
+ getDefaultTransitionTag()  
+ getDefaultTransitionType()
```