


cl_keyboard::CbKeyboardTwist
Teleop::onExit

cl_keyboard::CbKeyboardTwist
Teleop::update

smacc2::client_core
_components::CpTopicPublisher
::publish

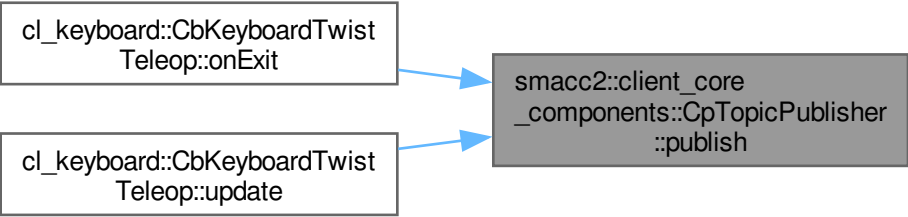

```
graph LR; A["cl_keyboard::CbKeyboardTwist<br/>Teleop::onExit"] --> C["smacc2::client_core<br/>_components::CpTopicPublisher<br/>::publish"]; B["cl_keyboard::CbKeyboardTwist<br/>Teleop::update"] --> C;
```

The diagram illustrates a mapping from two source functions to a single target function. On the left, there are two white rectangular boxes. The top box contains the text 'cl_keyboard::CbKeyboardTwist' and 'Teleop::onExit'. The bottom box contains the text 'cl_keyboard::CbKeyboardTwist' and 'Teleop::update'. On the right, there is a larger gray rectangular box containing the text 'smacc2::client_core', '_components::CpTopicPublisher', and '::publish'. Two blue arrows point from the right side of each white box to the left side of the gray box, indicating a mapping or connection between the source functions and the target function.