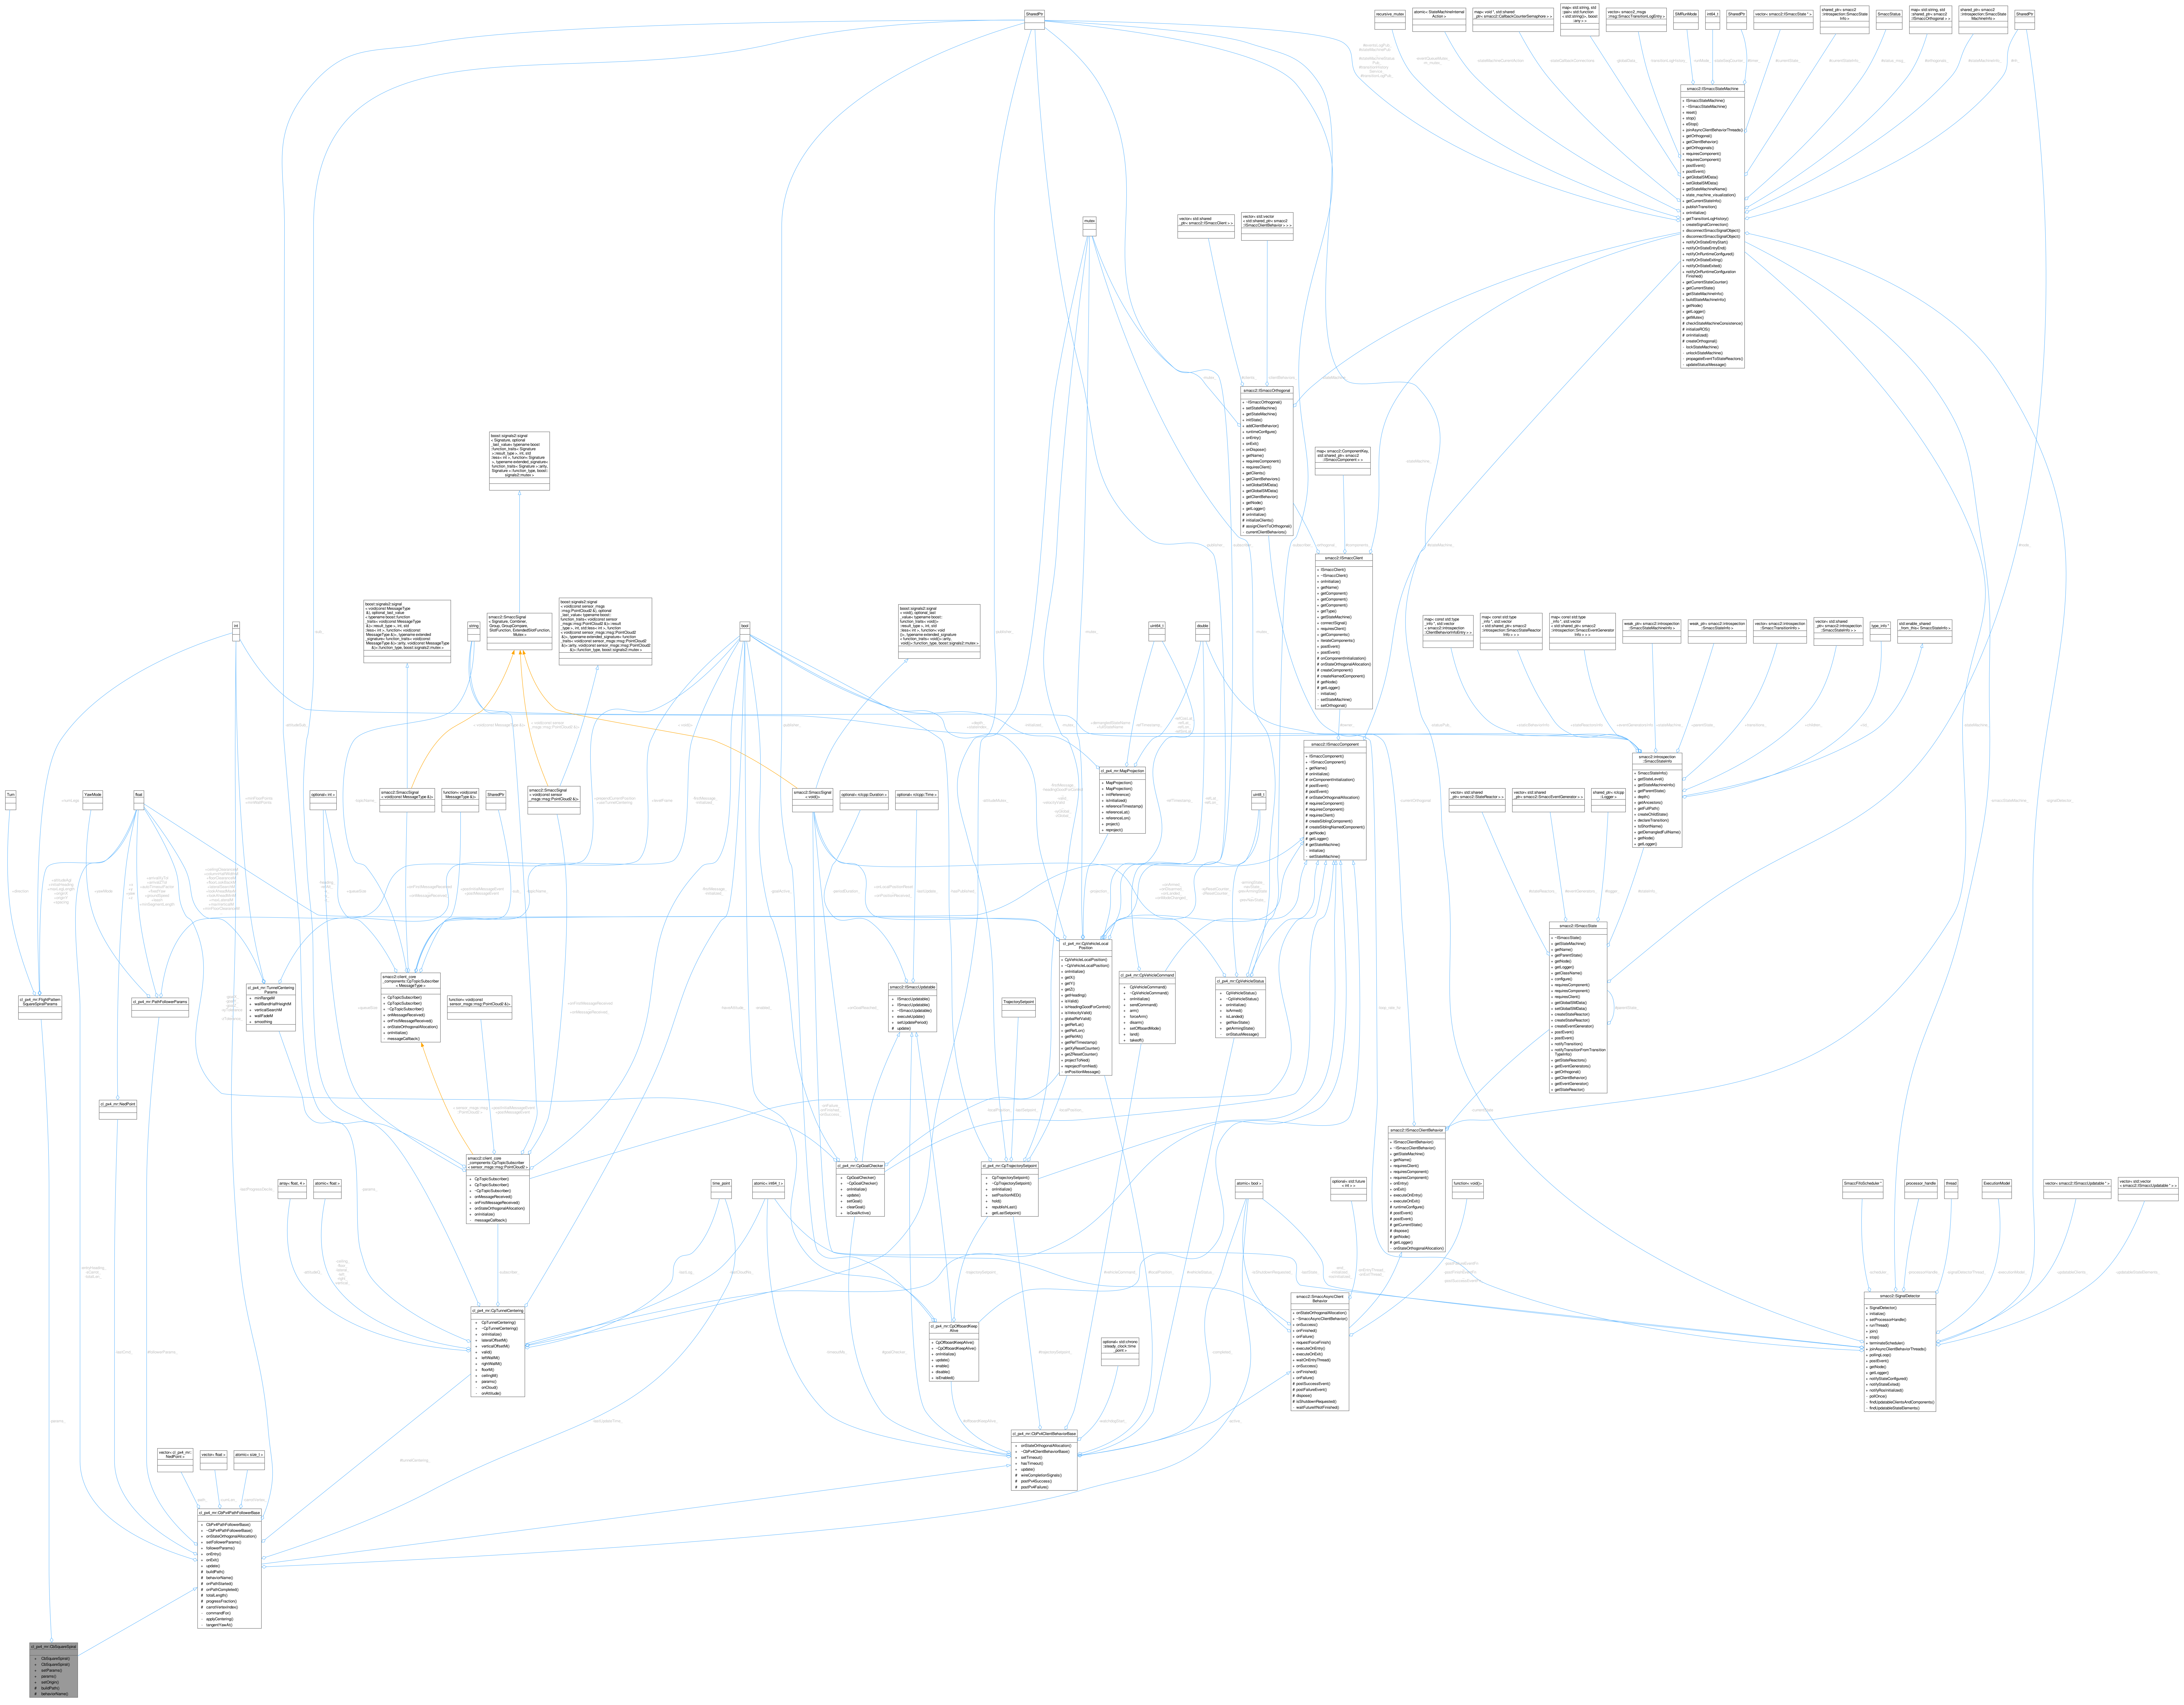
cl_px4_mr::CbSquareSpiral
+ CbSquareSpiral()
+ CbSquareSpiral()
+ setParams()
+ params()
+ setOrigin()
# buildPath()
# behaviorName()
-params_
cl_px4_mr::CbPx4PathFollowerBase
+ CbPx4PathFollowerBase()
+ ~CbPx4PathFollowerBase()
+ onStateOrthogonalAllocation()
+ setFollowerParams()
+ followerParams()
+ onEntry()
+ onExit()
+ update()
# buildPath()
# behaviorName()
# onPathStarted()
# onPathCompleted()
# totalLength()
# progressFraction()
# carrotVertexIndex()
- commandFor()
- applyCentering()
- tangentYawAt()
vector< cl_px4_mr::NedPoint >
vector< float >
atomic< size_t >
-path_
-cumLen_
-carrotVertex_
cl_px4_mr::FlightPatternSquareSpiralParams
cl_px4_mr::PathFollowerParams
cl_px4_mr::NedPoint
cl_px4_mr::TunnelCenteringParams
+ minRangeM
+ wallBandHalfHeightM
+ verticalSearchM
+ wallFadeM
+ smoothing
Turn
YawMode
float
optional< int >
SharedPtr
+direction
+yawMode
+altitudeAgl
+initialHeading
+maxLegLength
+originX
+originY
+spacing
+x
+y
+yaw
+z
+arrivalXyTol
+arrivalZTol
+autoTimeoutFactor
+fixedYaw
+groundSpeed
+leash
+minSegmentLength
smacc2::SmaccSignal< void(const MessageType &)>
function< void(const MessageType &)>
smacc2::SmaccSignal< void(const sensor_msgs::msg::PointCloud2 &)>
function< void(const sensor_msgs::msg::PointCloud2 &)>
smacc2::client_core_components::CpTopicSubscriber< MessageType >
+ CpTopicSubscriber()
+ CpTopicSubscriber()
+ ~CpTopicSubscriber()
+ onMessageReceived()
+ onFirstMessageReceived()
+ onStateOrthogonalAllocation()
+ onInitialize()
- messageCallback()
smacc2::client_core_components::CpTopicSubscriber< sensor_msgs::msg::PointCloud2 >
cl_px4_mr::CpTunnelCentering
+ CpTunnelCentering()
array< float, 4 >
atomic< float >
time_point
atomic< int64_t >
-attitudeQ_
-subscriber_
-lastLog_
cl_px4_mr::CpVehicleLocalPosition
+ CpVehicleLocalPosition()
+ ~CpVehicleLocalPosition()
+ onInitialize()
+ getX()
+ getY()
+ getZ()
+ getHeading()
+ isValid()
+ isHeadingGoodForControl()
+ isVelocityValid()
+ globalRefValid()
+ getRefLat()
+ getRefLon()
+ getRefAlt()
+ getRefTimestamp()
+ getXyResetCounter()
+ getZResetCounter()
+ projectToNed()
+ reprojectFromNed()
- onPositionMessage()
cl_px4_mr::CpVehicleCommand
+ CpVehicleCommand()
+ ~CpVehicleCommand()
+ onInitialize()
+ sendCommand()
+ arm()
+ forceArm()
+ disarm()
+ setOffboardMode()
+ land()
+ takeoff()
cl_px4_mr::CpVehicleStatus
+ CpVehicleStatus()
+ ~CpVehicleStatus()
+ onInitialize()
+ isArmed()
+ isLanded()
+ getNavState()
+ getArmingState()
- onStatusMessage()
smacc2::ISmaccUpdatable
+ ISmaccUpdatable()
+ ISmaccUpdatable()
+ ~ISmaccUpdatable()
+ executeUpdate()
+ setUpdatePeriod()
# update()
TrajectorySetpoint
cl_px4_mr::CpGoalChecker
+ CpGoalChecker()
+ ~CpGoalChecker()
+ onInitialize()
+ update()
+ setGoal()
+ clearGoal()
+ isGoalActive()
cl_px4_mr::CpTrajectorySetpoint
+ CpTrajectorySetpoint()
+ ~CpTrajectorySetpoint()
+ onInitialize()
+ setPositionNED()
+ hold()
+ republishLast()
+ getLastSetpoint()
cl_px4_mr::CpOffboardKeepAlive
+ CpOffboardKeepAlive()
+ ~CpOffboardKeepAlive()
+ onInitialize()
+ update()
+ enable()
+ disable()
+ isEnabled()
optional< std::chrono::steady_clock::time_point >
cl_px4_mr::CbPx4ClientBehaviorBase
+ onStateOrthogonalAllocation()
+ ~CbPx4ClientBehaviorBase()
+ setTimeout()
+ hasTimeout()
+ update()
# wireCompletionSignals()
# postPx4Success()
# postPx4Failure()
#offboardKeepAlive_
#trajectorySetpoint_
-watchdogStart_
-completed_
-active_
atomic< bool >
optional< std::future< int > >
function< void()>
smacc2::SmaccAsyncClientBehavior
+ onStateOrthogonalAllocation()
+ ~SmaccAsyncClientBehavior()
+ onSuccess()
+ onFinished()
+ onFailure()
+ requestForceFinish()
+ executeOnEntry()
+ executeOnExit()
+ waitOnEntryThread()
+ onSuccess()
+ onFinished()
+ onFailure()
# postSuccessEvent()
# postFailureEvent()
# dispose()
# isShutdownRequested()
- waitFutureIfNotFinished()
smacc2::ISmaccClientBehavior
smacc2::ISmaccState
smacc2::ISmaccComponent
smacc2::ISmaccClient
smacc2::ISmaccOrthogonal
smacc2::ISmaccStateMachine
smacc2::introspection::SmaccStateInfo
map< smacc2::ComponentKey, std::shared_ptr< smacc2::ISmaccComponent > >
map< const std::type_info *, std::vector< smacc2::introspection::ClientBehaviorInfoEntry > >
weak_ptr< smacc2::introspection::SmaccStateMachineInfo >
weak_ptr< smacc2::introspection::SmaccStateInfo >
vector< smacc2::introspection::SmaccTransitionInfo >
type_info *
std::enable_shared_from_this< SmaccStateInfo >
vector< std::shared_ptr< smacc2::StateReactor > >
vector< std::shared_ptr< smacc2::SmaccEventGenerator > >
shared_ptr< rclcpp::Logger >
double
uint8_t
mutex
SmaccFifoScheduler *
processor_handle
thread
ExecutionModel
vector< smacc2::ISmaccUpdatable * >
vector< std::vector< smacc2::ISmaccUpdatable * > >
-scheduler_
-processorHandle_
-signalDetectorThread_
-executionModel_
-updatableClients_
-updatableStateElements_
smacc2::SignalDetector
+ SignalDetector()
+ initialize()
+ setProcessorHandle()
+ runThread()
+ join()
+ stop()
+ terminateScheduler()
+ joinAsyncClientBehaviorThreads()
+ pollingLoop()
+ postEvent()
+ getNode()
+ getLogger()
+ notifyStateConfigured()
+ notifyStateExited()
+ notifyRosInitialized()
- pollOnce()
- findUpdatableClientsAndComponents()
- findUpdatableStateElements()