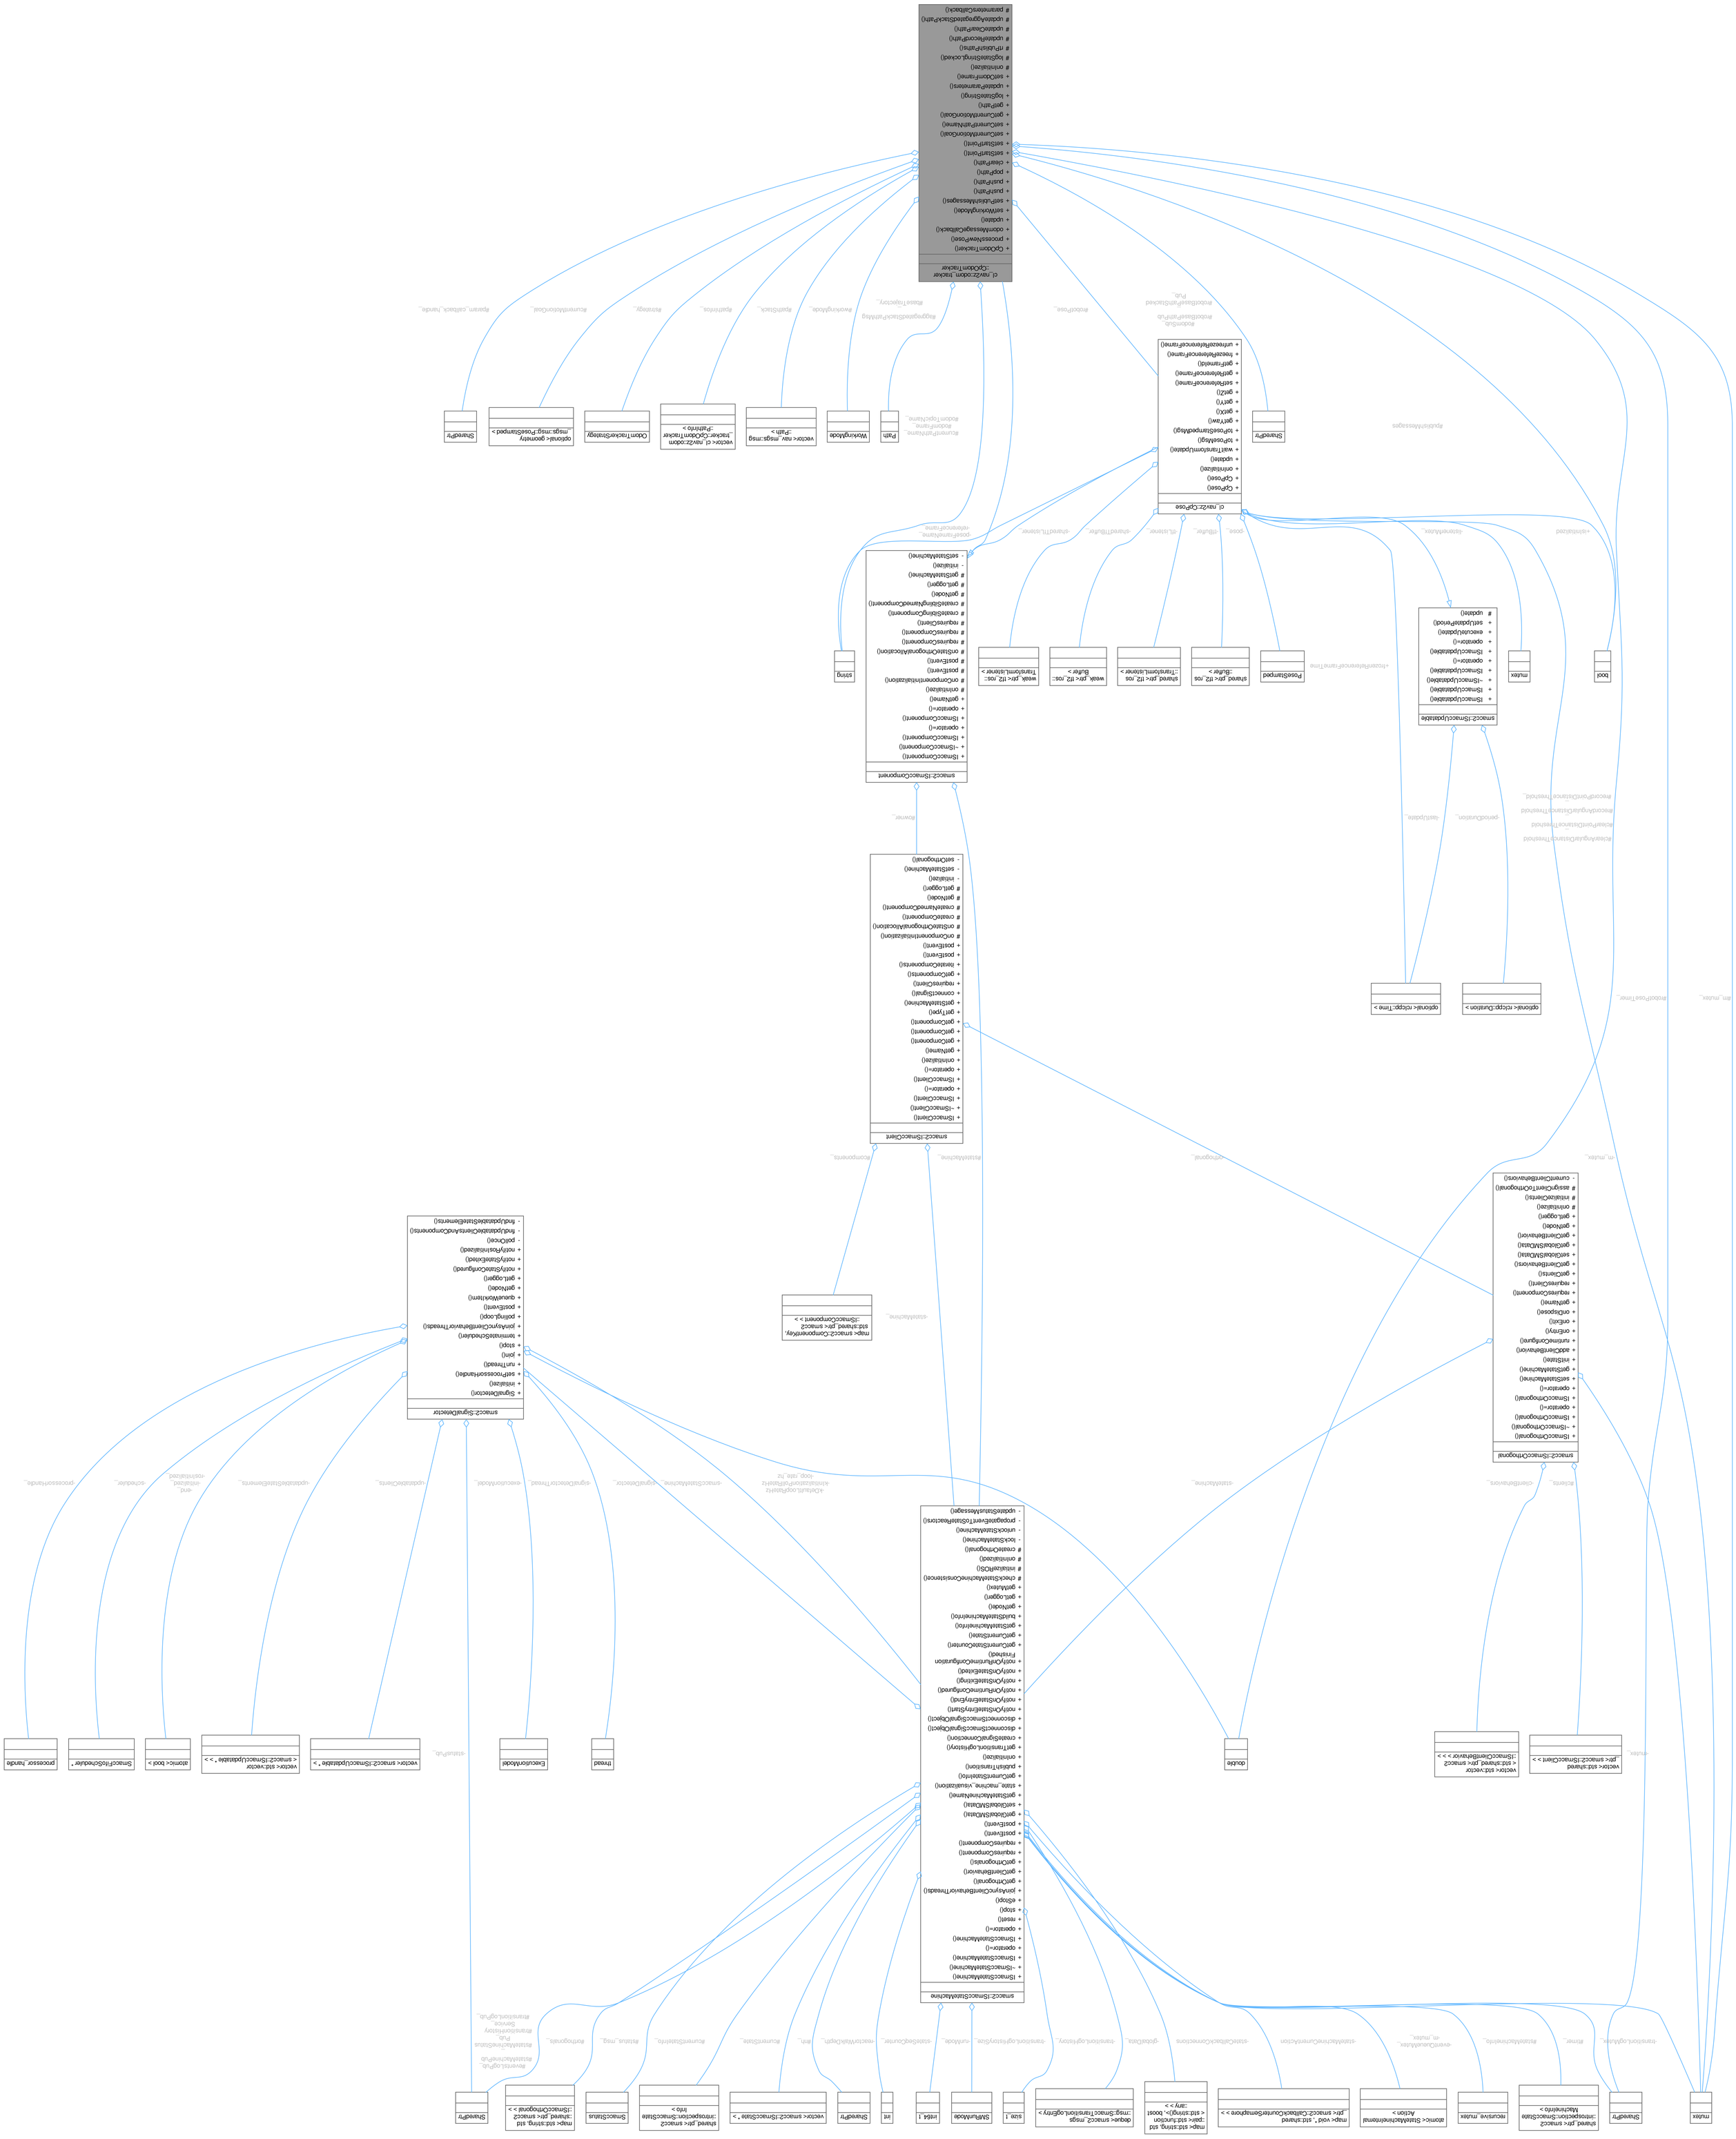
ol_nav2::odom_Tracker
::OpOdomTracker
+ OpOdomTracker()
+ processNewPose()
+ odomMessageCallback()
+ update()
+ setMovingMode()
+ setPublishMessages()
+ pushPath()
+ pushPath()
+ popPath()
+ clearPath()
+ setIsIAPOn()
+ setIsIAPOn()
+ setIsIAPOn()
+ setCurrentMotionGoal()
+ setCurrentMotionGoal()
+ setCurrentPathName()
+ getCurrentMotionGoal()
+ getPath()
+ logStateSmng()
+ updateParameters()
+ setCOdomFrame()
+ onInitialize()
# logStateSmngLocked()
# rPublishPaths()
# updateRecordPath()
# updateClearPath()
# updateAggregatedStackPath()
# parameterCallback()
#odomSub_
#robotBasePathPub_
#robotPose_
#baseTrajectory_
#aggregatedStackPathMsg_
#workingMode_
#pathStack_
#pathInfos_
#strategy_
#currentMotionGoal_
#param_callback_handle_
SnavedPr
optional< geometry_msgs::msg::PoseStamped >
OdomTrackerStrategy
vector< ol_nav2::odom_Tracker::PathInfo >
vector< nav_msgs::msg::Path >
WorkingMode
Path
#currentPathName_
#odomFrame_
#odomTopicName_
SnavedPr
#publishMessages
ol_nav2::CPPose
+ CPPose()
+ CPPose()
+ onInitialize()
+ updated()
+ waitTransformUpdated()
+ toPoseMsg()
+ toPoseStampedMsg()
+ getYaw()
+ getX()
+ getY()
+ getZ()
+ setReferenceFrame()
+ getReferenceFrame()
+ getFrameId()
+ freezeReferenceFrame()
+ unfreezeReferenceFrame()
#robotPose_
#robotBasePathPub_
#frozenReferenceFrame
PoseStamped
shared_ptr< tf2_ros::Transform_Listener >
weak_ptr< tf2_ros::Buffer >
shared_ptr< tf2_ros::Transform_Listener >
weak_ptr< tf2_ros::Buffer >
std::string
-pose_
-tfBuffer_
-tfListener_
-sharedTfBuffer_
-sharedTfListener_
-poseFrameName_
-referenceFrame_
+isInitialized
-listenerMutex_
bool
mutex
smacc2::ISmaccOrthogonal
+ ISmaccOrthogonal()
+ ~ISmaccOrthogonal()
+ ISmaccOrthogonal()
+ operator=()
+ ISmaccOrthogonal()
+ operator=()
+ operator=()
+ ISmaccOrthogonal()
+ setStateMachine()
+ getStateMachine()
+ initState()
+ addClientBehavior()
+ numInregConfigure()
+ onEntry()
+ onExit()
+ onDispose()
+ getName()
+ requiresComponent()
+ requiresClient()
+ getClients()
+ getClientBehaviors()
+ getGlobalSMData()
+ setGlobalSMData()
+ getClientBehavior()
+ getNode()
+ getLogger()
# onInitialize()
# initializeClients()
# assignClientToOrthogonal()
- currentClientBehaviors()
SmaccFileScheduler *
atomic< bool >
vector< std::shared_ptr< smacc2::ISmaccUpdatable > >
optional< rclcpp::Duration >
optional< rclcpp::Time >
vector< std::shared_ptr< smacc2::ISmaccClientBehavior > >
-clientBehaviors_
-clients_
-lastUpdate_
-periodDuration_
#clearAngularDistanceThreshold_
#clearPointDistanceThreshold
#recordAngularDistanceThreshold
#recordPointDistanceThreshold_
-robotPoseTimer_
-tfm_mutex_
-stateMachine_
-orthogonal_
-components_
-stateMachine_
-m_mutex_
-stateMachine_
-currentStateIndex_
-stateReactorWaitDepth_
-transitionLogHistory_
-globalData_
-stateCallBackConnections
-stateMachineCurrentAction
-eventQueueMutex_
-m_mutex_
-stateMachineInfo_
#timer_
-transitionLogMutex_
#transitionLogPub_
#eventLogPub_
#stateMachineInitializedPub_
#stateMachineStatusPub_
#transitionHistorySrvPub_
#status_msg_
#orthogonals_
#currentStateIndex_
#path_
#currentState_
#status_
#stateSeqCounter_
#numLoops_
#transitionLogHistorySize_
#transitionLogHistory_
#globalData_
#stateCallBackConnections
#stateMachineCurrentAction
#eventQueueMutex_
#m_mutex_
#stateMachineInfo_
#timer_
#transitionLogMutex_
SmaccStatus
vector< smacc2::ISmaccState * >
shared_ptr< smacc2::introspection::SmaccStateInfo >
SMRuntimeNode
int
int64_t
size_t
deque< smacc2_msgs::msg::TransitionLogEntry >
map< std::string, std::function< std::string()>*, boost::any >
map< void *, std::shared_ptr< smacc2::CallbackCounterSemaphore > >
atomic< StateMachineInternal Action >
recursive_mutex
shared_ptr< smacc2::introspection::SmaccStateMachineInfo >
SnavedPr
mutex
map< std::string, std::shared_ptr< smacc2::ISmaccUpdatable > >
map< std::string, std::shared_ptr< smacc2::ISmaccClient > >
map< smacc2::ComponentKey, std::shared_ptr< smacc2::ISmaccComponent > >
smacc2::ISmaccComponent
+ ISmaccComponent()
+ ~ISmaccComponent()
+ ISmaccComponent()
+ operator=()
+ ISmaccComponent()
+ operator=()
+ getName()
+ onInitialize()
# onComponentInitialization()
# onStateOrthogonalAllocation()
# onCreateComponent()
# createNamedComponent()
# getNode()
# getLogger()
- initialize()
- setStateMachine()
- setOrthogonal()
#components_
#stateMachine_
#orthogonal_
#owner_
smacc2::ISmaccClient
+ ISmaccClient()
+ ~ISmaccClient()
+ ISmaccClient()
+ operator=()
+ ISmaccClient()
+ operator=()
+ getName()
+ onInitialize()
+ getClients()
+ getClient()
+ getClient()
+ getClient