Surviving Sanitization with QuantGhost: Deployment-Robust and Stealthy Steganography in Neural-Network Weights

Eko Arip Winanto, Mohd Yazid Idris, and Kurniabudi

***Abstract*—Pre-trained networks now circulate as shared artifacts, so a tampered checkpoint on a popular hub reaches every downstream user. Prior attacks such as StegoNet, EvilModel and MaleficNet show that float32 weights can hide megabytes of data at negligible accuracy cost, yet they assume the model is run exactly as published. It rarely is. Before reaching an edge or medical (IoMT) device a model is quantized to INT8, pruned and fine-tuned, and we confirm on real networks that these routine steps erase mantissa-bit payloads entirely. We then show that they need not. We present QuantGhost, a quantization-aware embedding that writes each payload bit into the INT8 code that quantization produces, so it survives by construction; placing every weight at a random point inside its code's bin keeps the mantissa distribution natural and defeats byte-image steganalysis, while redundant coding carries the payload through pruning and fine-tuning. On a real ResNet-50 a $3.2\,$MB payload survives INT8 at 99.9999% fidelity; the payload also survives PyTorch's production INT8 kernel byte-exactly once the embedding matches the framework's scale convention; on a real ResNet-56 the attack costs 0.19 percentage points of accuracy; and against the released Model X-Ray detector on a diverse model population our payload is indistinguishable from benign weights (0.50, chance), whereas the prior attack is flagged (0.81). Underlying these results is a fundamental limit we prove, the capacity-robustness-stealth trilemma: at most two of the three hold together, and any permutation-invariant channel, ours or prior watermarking, is bounded by the sum of $k_h k_w$ over convolution layers. A faithful neuron permutation, function-preserving to 10^{-14}, removes the high-capacity payload but leaves that small invariant channel intact, which suffices to bootstrap recovery. We also propose a sub-quantum residual detector that reliably flags the off-the-shelf attack (ROC-AUC 0.98–1.0 across a narrow and a diverse 3000-model zoo) where byte-level steganalysis fails, while showing that an adaptive attacker still reaches chance on a diverse population, so detection must be backed by the structural bound. Deployment sanitization alone is therefore incomplete, and we set out what closing the gap requires.**

***Index Terms*—Neural network steganography, stegomalware, model supply chain, quantization, steganalysis, deep learning security, QuantGhost.**

E. A. Winanto is with the Faculty of Computing, Universiti Teknologi Malaysia, Johor Bahru 81310, Malaysia, and the Department of Computer Engineering, Universitas Dinamika Bangsa, Jambi 36138, Indonesia (e-mail: winanto@graduate.utm.my; ORCID: 0000-0003-3274-1885).

M. Y. Idris is with the Faculty of Computing and MaGIC-X, Universiti Teknologi Malaysia, Johor Bahru 81310, Malaysia (ORCID: 0000-0001-7702-6610).

Kurniabudi is the corresponding author, with the Master of Information System program, Universitas Dinamika Bangsa, Jambi 36138, Indonesia (e-mail: kurniabudi@unama.ac.id; ORCID: 0000-0001-9073-8858).

This work was funded by Universitas Dinamika Bangsa and supported by MaGIC-X, Universiti Teknologi Malaysia.

I. Introduction

Sharing pre-trained models is now the default way to build machine-learning systems. Practitioners pull a checkpoint from a hub, adapt it, and ship it. That convenience turns the model file itself into a supply-chain asset, and a tampered file propagates to everyone who reuses it, the same dynamic that makes poisoned packages and trojaned binaries dangerous, transplanted into the weight space of a network [1]–[3]. The carrier is generous: a float32 weight devotes most of its mantissa to precision the task never needs, and StegoNet [4], EvilModel [5], [6] and MaleficNet [7], [8] exploit exactly that slack to hide megabytes of payload with accuracy loss below one percent.

These attacks assume a static artefact, a condition the deployment pipeline violates. A model is almost never deployed bit-for-bit as published. On the way to a phone, a sensor, or a bedside IoMT monitor it is compressed: post-training INT8 quantization [9], magnitude or structured pruning [10], [11], and a round of fine-tuning on local data. We show in Section IV, on real networks, not toy ones, that this pipeline annihilates a mantissa-bit payload: recovery falls to a coin flip at every embedding depth. Worse for the attacker, the very same transforms have been put forward as defenses, alongside neuron permutation (NeuPerm), which shuffles channel order using the network's permutation symmetry and scrambles any position-dependent payload at no accuracy cost [12]. Detection has matured in parallel: Model X-Ray casts the weights to a grayscale image and learns, from a handful of examples, to tell stego from benign [13].

So the question that has not been answered is sharp. *Can a payload survive the full deployment pipeline and still be stealthy and accuracy-preserving?* We answer it constructively, but the more durable contribution is what the answer exposes: a fundamental three-way limit, a *capacity-robustness-stealth trilemma*, that constrains every weight-embedding scheme, ours and prior watermarking alike. We develop the work in three movements.

First, the attack, which we name QuantGhost. Rather than hiding in the mantissa, it writes each payload bit into the INT8 code that quantization will produce, so re-quantization recovers it exactly (Section V). Stealth follows from two design choices: the payload is encrypted, and each weight is placed at a random point *inside* the bin that encodes its bit. The mantissa keeps its natural law, and a byte-image detector has nothing to latch onto. Redundancy across many weights,

decoded by majority vote, carries the payload through pruning and fine-tuning.

Second, and at the centre of the paper, a limit. We formalize and prove the capacity-robustness-stealth trilemma (Section VI): no embedding can be simultaneously high-capacity, permutation-invariant, and stealthy-quantization-robust. The argument is short once the right object is in view. Once an embedding is stealthy and quantization-robust, the only identity a weight keeps under neuron permutation is its coarse code, and codes that share a permutation orbit cannot index a high-capacity positional message. The permutation-invariant channel is therefore bounded by $\sum_\ell k_h^{(\ell)} k_w^{(\ell)}$ bits, a quantity four to five orders of magnitude smaller than the positional channel. The bound is tight, it matches our measurements to the bit, and it holds for prior robust watermarking as much as for QuantGhost.

Third, the consequence for defense. A faithful neuron permutation, verified function-preserving to machine precision on a real ResNet-18, does destroy the high-capacity payload. But the small invariant channel survives untouched, and we demonstrate the consequence end to end: after the full INT8, pruning, and NeuPerm pipeline, a 128-bit AES key recovered from the invariant channel decrypts the payload byte-exactly, even though the in-weight payload itself is gone. Sanitization that stops at NeuPerm is therefore incomplete, and we describe what closing the gap would take (Section X).

This paper makes the following contributions:

- **A capacity-robustness-stealth trilemma.** We formalize and prove that no weight-embedding scheme can be high-capacity, permutation-invariant, and stealthy-quantization-robust at once, with a tight bound of $\sum_\ell k_h^{(\ell)} k_w^{(\ell)}$ bits on any permutation-invariant channel. The bound governs prior robust watermarking as well as our own attack, and we confirm it to the bit on a real ResNet-18.
- **QuantGhost, a construction that reaches the bound.** We build a deployment-robust, distribution-preserving embedding that occupies the high-capacity, stealthy, quantization-robust corner of the trilemma. It survives INT8 quantization, pruning and fine-tuning, and we demonstrate it at 3.2 MB on a real ResNet-50 at a cost of 0.19 percentage points of accuracy on a real ResNet-56.
- **Why prior payloads die.** We quantify, on real models, why routine deployment transforms erase the payloads of prior weight-steganography attacks, and explain the mechanism through the quantization step size.
- **The limit of permutation defenses, demonstrated end to end.** We implement a faithful, full-model neuron permutation on a real ResNet-18 and show that, although it erases the high-capacity payload, a 128-bit key embedded in the invariant channel survives the entire INT8, pruning, and permutation pipeline and decrypts the payload byte-exactly, so permutation-based sanitization is incomplete.
- **A targeted detector and its limit.** We propose and evaluate a sub-quantum residual steganalyzer that detects the basic QuantGhost at ROC-AUC 0.98–1.0 across a narrow and a diverse 3000-model zoo where byte-level steganalysis is at chance; we then show honestly that an adaptive attacker reaches chance on the diverse zoo, so detection must compose with neuron permutation to bound the channel.
- **Generality.** We show that the attack is architecture- and domain-agnostic, carrying a 10.81 MB payload through a real Vision Transformer and surviving INT8 with unchanged accuracy, and that it transfers across domains through a cross-dataset study on network-intrusion-detection models; we then set out the requirements for a complete defense.

The remainder of the paper is organized as follows. Section II reviews weight steganography, steganalysis, sanitization defenses, and watermarking. Section III states the threat model and Section IV shows why naive payloads die in deployment. Section V develops the proposed attack and Section VI proves the trilemma. Section VII describes the experimental setup and Section VIII reports the evaluation, including the cross-dataset ablation. Section X discusses defenses, Section XI the limitations, and Section XII the ethical considerations, before Section XIII concludes.

II. Background and Related Work

a) Hiding payloads in weights.: StegoNet [4] introduced several channels, LSB substitution, value mapping, sign and resilience coding, and reported megabyte capacity. EvilModel [5] and its successor [6] simplified this to direct byte substitution in the low-order mantissa and pushed capacity past 36 MB on AlexNet. MaleficNet [7] departed from raw LSB editing, spreading the payload with CDMA-style channel coding so that it tolerates small weight changes, and its journal extension surveys the broader ecosystem risk [8]. A complementary line measures how much a given architecture can absorb before accuracy degrades [14], [15], and a recent survey organizes the field [16]. What unites these works is the verbatim assumption: none reports survival through INT8 quantization, and we show (Section IV) that the LSB-based ones do not survive it.

b) Detecting it.: Model X-Ray [13], published in this journal, maps weights to a Grayscale-Fourpart image and trains a metric-learning few-shot classifier [17], [18] that flags embedded payloads from as few as six examples and down to a 25% embedding rate. Siamese and meta-learning detectors have likewise proven effective for obfuscated malware [19]. Byte-entropy thresholds and raw-byte 1D-CNNs of the MalConv family round out the standard baseline set, and we evaluate against all of them.

c) Sanitizing it.: Quantization and pruning are cited as incidental countermeasures because they perturb weights, much as fine-pruning was proposed to remove backdoors [20]; NeuPerm [12] makes the idea deliberate, using permutation symmetry to relabel channels and break any position-coded payload, reportedly even in large language models. Our trilemma explains both why NeuPerm works against high-capacity payloads and why a residual channel must always survive it.

d) Robust watermarking and quantization-index modulation.: The closest relative of QuantGhost is robust DNN watermarking. Spread-transform dither modulation [21], published

in this journal, is a quantization-index-modulation (QIM) scheme; fixed distribution-optimized weights [22] and spread-spectrum TATTOOED [23] pursue the same robustness by other coding. QuantGhost departs on four axes. *Capacity*: QIM marks a few kilobits for ownership, whereas QuantGhost delivers megabytes (one bit per weight). *Domain*: QIM quantizes a projected feature onto lattice points, leaving a detectable regularity, while QuantGhost uses a random in-bin offset that keeps the mantissa natural and evades learned steganalysis. *Deployment*: watermarks are fixed before or during training and read by the owner, whereas QuantGhost is post-hoc and recovered by an adversary after an unknown transform chain. *Limit*: none of these works bounds what such an embedding can achieve, whereas our trilemma (Section VI) does, and it applies to QIM watermarking as well.

e) Why IoMT/IoT.: Edge intrusion-detection models are a realistic deployment target: they are compact, frequently retrained, and almost always quantized. Recent work in this journal studies federated and adversarial robustness of such detectors [24]–[26], and surveys map the IoT IDS threat landscape [27]. We use the CICIoT2023 [28] and CICIoMT2024 [29] benchmarks to show our attack carries over from vision models to tabular network classifiers (Section VIII-J).

f) Positioning.: Table I places QuantGhost against the prior art on the axes that matter for a deployed model. The earlier weight-stego attacks are high-capacity and post-hoc but are erased by every deployment transform and are detectable; robust watermarking is stealthy and transform-robust but low-capacity and must be baked in before training; and none of these methods is evaluated against neuron permutation. QuantGhost is the only construction that is at once high-capacity, post-hoc, quantization-robust, and stealthy against a learned steganalyzer, and the only one whose behaviour under neuron permutation is characterized, by the trilemma, rather than left open.

III. Threat Model

We assume a supply-chain attacker who controls a model file and publishes it on a hub, hoping it is downloaded and deployed. The attacker can read and rewrite every weight before publication but has no access to the victim afterwards: no view of the victim's data, training, or quantization run. Crucially, the attacker knows the *scheme* the victim will use, because there is essentially one default, per-tensor symmetric INT8 [9], and can assume the victim may additionally prune, fine-tune, permute, or run a steganalysis detector, in any combination.

A run is a success for the attacker if, after whatever transform chain the victim applies, the payload is recovered (bit-exact after error correction) at a stated capacity, the model's task accuracy is essentially unchanged, and the model is not flagged by the detectors of Section VII. We treat the defender symmetrically: any subset of {INT8, pruning, fine-tuning, NeuPerm} plus steganalysis, and we ask which combinations actually neutralize the payload without ruining the model.

For ethics (Section XII) all payloads in our experiments are encrypted random bytes or benign binaries. No live malware is embedded, executed, or distributed.

IV. Motivation: Payloads Die in Deployment

We first quantify why the naive attack fails under quantization. Let w be a float32 weight. Per-tensor symmetric INT8 quantization maps it to an integer code

$$q = \mathrm{clip}\big(\,\mathrm{round}(w/s),\, -q_{\max},\, q_{\max}\big), \qquad s = \frac{\max_i |w_i|}{q_{\max}}, \tag{1}$$

with $q_{\max} = 127$. An X-LSB attack rewrites the X lowest mantissa bits of w, which shifts its value by at most about $2^{-23+X}|w|$. For any X that leaves accuracy intact this shift is far smaller than a single quantization step s, so the clean and the stego weight collapse to the *same* code q and the message is gone. Pushing X high enough to cross a step does survive quantization, but only by corrupting the weight so badly that accuracy falls apart (we measure a relative perturbation of 0.03 at $X{=}20$ and 0.25 at $X{=}23$).

The numbers bear this out (Table V). On a real ResNet-18 the bit-survival of an EvilModel/StegoNet-style payload after INT8 is 0.50, chance, at $X \in \{8, 16, 23\}$. In other words, the kind of compact, quantized model that an edge or IoMT deployment actually runs is, by accident, immune to the published attacks.

V. The Proposed Attack: QuantGhost

Figure 1 situates QuantGhost inside the full pipeline, from the attacker's build step through the victim's transforms to recovery. We describe each component in turn; Algorithm 1 gives the embedding procedure.

A. Payload preparation

Two preprocessing steps make the rest work. First the attacker encrypts the payload with a stream cipher in counter mode (AES-CTR in our implementation); the ciphertext is statistically uniform, which is what later lets the embedded bits hide in plain sight. Second the ciphertext is protected with an erasure code, an LDPC/fountain layer [30], so that the small number of bit errors that pruning and fine-tuning inject are repaired exactly at the receiver. The coded stream is then tiled across the host weights for redundancy, as described in Section V-D.

B. Quantization-aware embedding

The core idea is to stop fighting quantization and instead aim for it. Reading (1) backwards, every float in the half-open bin

$$v \in \big[(q^\star - \tfrac{1}{2})s,\ (q^\star + \tfrac{1}{2})s\big) \implies \mathrm{round}(v/s) = q^\star, \tag{2}$$

so if we want the victim to read back a code $q^\star$ we are free to choose any value in that interval. We pick $q^\star$ so that its least significant bit equals the payload bit, $|q^\star| \bmod 2 = b$. After the victim quantizes, the bit is recovered by $\hat{b} = |\mathrm{round}(\tilde{w}/s)| \bmod 2$, exactly, not probabilistically.

One subtlety decides whether this works in practice. The victim recomputes the scale s from (1) on the *modified* weights, and if our edits change the per-tensor maximum, the grid shifts and recovery drifts. We prevent this by pinning:

TABLE I
POSITIONING OF QUANTGHOST AGAINST PRIOR WEIGHT-HIDING METHODS. ✓: HAS THE PROPERTY / SURVIVES THE TRANSFORM; ×: DOES NOT; PART.: PARTIAL. "STEALTH" IS EVASION OF A LEARNED STEGANALYZER OF THE MODEL X-RAY CLASS. ROBUSTNESS ENTRIES REFLECT EACH METHOD'S REPORTED DESIGN; THE INT8 ERASURE OF MANTISSA-BIT METHODS IS CONFIRMED EMPIRICALLY IN SECTION IV.

Method	Capacity	Post-hoc	INT8	Prune	Fine-tune	NeuPerm	Stealth	Accuracy	Goal
StegoNet [4]	high	✓	×	×	×	×	×	✓	payload
EvilModel [5], [6]	high	✓	×	×	×	×	×	✓	payload
MaleficNet [7]	high	✓	×	part.	part.	×	part.	✓	payload
ST-DM watermark [21]	low	×	✓	✓	✓	n/a	✓	✓	identity
TATTOOED [23]	low	×	✓	✓	✓	n/a	✓	✓	identity
QuantGhost (ours)	**high**	✓	✓	✓	✓	part.	✓	✓	payload

the single largest-magnitude weight in each tensor is held at $|q|{=}q_{\max}$ and carries no payload, so the victim's recomputed scale matches ours and the two grids coincide. With pinning, survival through quantization is 1.000 across per-tensor and per-channel INT8 and even INT4 (Table II).

C. Distribution-preserving stealth

Snapping weights onto the grid would survive quantization but advertise itself: the low mantissa byte would take only a handful of values, its entropy would collapse, and a byte-image detector would separate stego from benign trivially. So we do not snap. We draw a random offset $u \sim \mathcal{U}(-0.49, 0.49)$ and place the weight at

$$\tilde{w} = \big(q^\star + u\big)\, s, \tag{3}$$

which still lands inside the bin (2), survival is untouched, but leaves the sub-quantum part, the part the mantissa stores, drawn from its natural in-bin spread. Concretely, writing $\tilde{w}$ as four bytes and taking the Shannon entropy of its low mantissa byte,

$$H = -\sum_{c=0}^{255} p_c \log_2 p_c, \qquad p_c = \Pr[\text{low byte} = c], \tag{4}$$

stays at 7.999 bits, indistinguishable from benign weights, whereas grid-aligned embedding collapses it. Because the payload was encrypted, the code LSB plane itself is uniform, so there is no higher-order regularity for a detector to find either.

D. Redundancy for pruning and fine-tuning

Quantization is deterministic, but pruning and fine-tuning move weights around, and a weight that moves across a bin boundary flips its bit. We absorb this by tiling: bit $g \bmod L$ is written at weight index g, so each of the L message bits is carried by $r = P/L$ weights (P being the tensor count of embeddable weights). Recovery is a majority vote,

$$\hat{m}_j = \mathbf{1}\Big[\textstyle\sum_{g \equiv j \,(\mathrm{mod}\, L)} \hat{b}_g \;>\; \tfrac{1}{2}\,\#\{g \equiv j\}\Big], \tag{5}$$

which tolerates any corrupted minority. The redundancy r is the dial that trades capacity for robustness, and it traces the frontier we map in Section VIII.

Algorithm 1 Quantization-aware stealthy embedding (per weight tensor)

Require: tensor W, coded payload bits $\mathbf{b}$, level $q_{\max}$
Ensure: stego tensor $\tilde{W}$, scale s

$s \leftarrow \max_i |W_i| / q_{\max}$; $q \leftarrow \mathrm{clip}(\mathrm{round}(W/s), -q_{\max}, q_{\max})$
$p \leftarrow \arg\max_i |q_i|$ ▷ the weight that pins the scale
for each weight index i **do**
  $b \leftarrow \mathbf{b}[\, i \bmod |\mathbf{b}|\,]$ ▷ redundant tiling
  $|q_i| \leftarrow (|q_i| \,\&\, {\sim}1) \,|\, b$ ▷ write bit into code LSB
  $u_i \leftarrow \mathrm{RAND}(-0.49, 0.49)$; **if** $i{=}p$ **then** $u_i \leftarrow 0$
  $\tilde{W}_i \leftarrow \mathrm{sign}(q_i)\,(|q_i| + u_i)\, s$
end for
clip $\tilde{W}$ to $[-q_{\max}s,\, q_{\max}s]$ ▷ keep victim scale $= s$
return $\tilde{W}$, s

E. A permutation-invariant bootstrap channel

Neuron permutation is a different kind of threat: it does not change values, it relabels channels, and a payload indexed by channel position is scrambled wholesale. The trilemma (Section VI) shows this is unavoidable for a high-capacity positional payload. There is, however, one axis a channel permutation never touches: the spatial (k_h, k_w) position inside a convolution filter. Embedding a bit that is replicated across all input and output channels at a fixed spatial tap is therefore invariant to permutation, and it survives NeuPerm intact. The price is capacity, $k_h k_w$ bits per conv tensor, but that is exactly enough to deliver the decryption key or a short URL, which bootstraps the high-capacity channel or an out-of-band fetch.

F. Recovery at the deployed model

Recovery mirrors the build in reverse and needs only the deployed file. The receiver recomputes each tensor's scale via (1), reads the code LSBs, de-tiles and majority-votes (5), runs the erasure decoder to repair the residual errors (including the pinned weights), and finally decrypts. The only secret that must travel out of band, or through the invariant channel, is the key.

G. Capacity, complexity, and parameters

a) Capacity.: With n_{bits} bits per weight, a tensor of n weights carries $n\, n_{\mathrm{bits}} - \rho$ bits, where ρ is the number of pinned scale-defining weights ($\rho = 1$ for per-tensor and

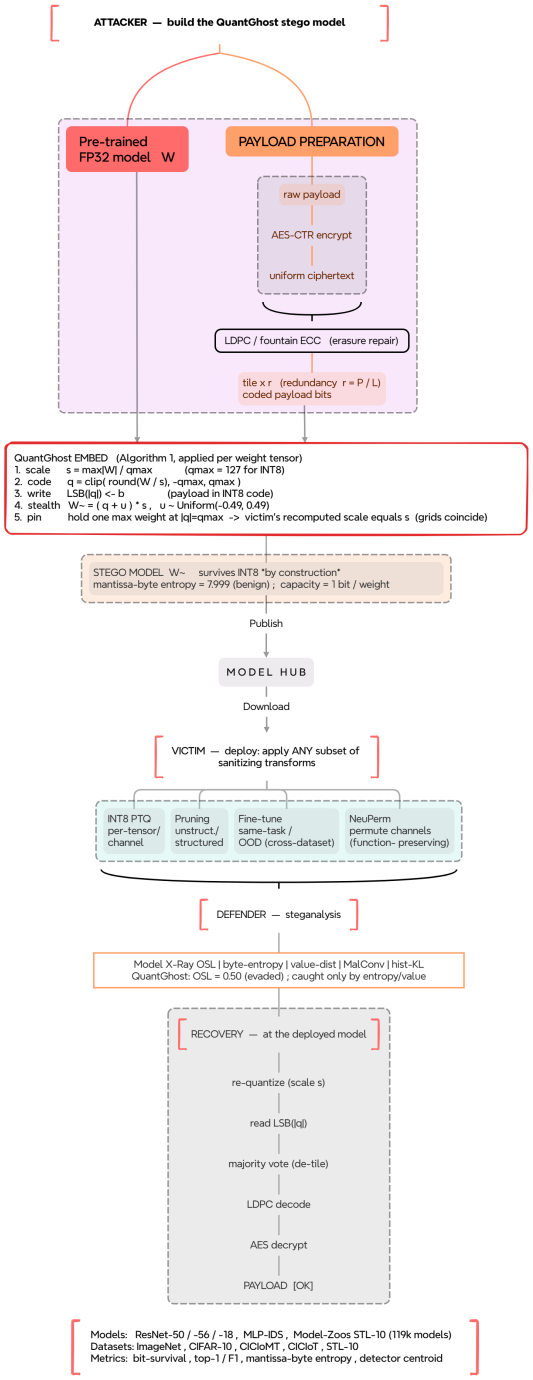


Fig. 1. End-to-end QuantGhost pipeline. The attacker embeds an encrypted, error-coded payload (Algorithm 1) and publishes a benign-looking model; the victim applies any subset of INT8 quantization, pruning, fine-tuning and NeuPerm; recovery re-quantizes, reads the code LSBs, and majority-votes.

$\rho = C_{\text{out}}$ for per-channel quantization). The raw aggregate is therefore $C_{\text{raw}} = n_{\text{bits}}\, P - O(\text{tensors})$, i.e. essentially $P\, n_{\text{bits}}$ bits; at one bit per weight this is $P/8$ bytes ($25.5\,\text{M} \to 3.19\,\text{MB}$ on ResNet-50). The redundancy and erasure layers trade this raw figure for reliability, giving a *useful* capacity C_{raw}/r at redundancy r.

b) Complexity.: Embedding (Algorithm 1) is a single pass over the weights: $O(P)$ time and $O(1)$ extra memory beyond the host tensor. Extraction is also $O(P)$, one re-quantization and LSB read per weight plus an $O(P)$ tally for the majority vote. Both add negligible overhead to a model load and are independent of the payload content.

c) Redundancy and the survival bound.: Let redundancy be $r = P/L$ for an L-bit message, and suppose a transform flips each carrier of a given bit independently with probability $p < \frac{1}{2}$. The majority vote over r carriers then errs with probability at most $\exp\big(-2r(\frac{1}{2}-p)^2\big)$ by Hoeffding's inequality, so a target per-bit reliability ε needs

$$r \;\geq\; \frac{\ln(1/\varepsilon)}{2\,(\frac{1}{2}-p)^2}. \tag{6}$$

This is the analytic form of the capacity–robustness frontier we measure empirically: INT8 quantization gives $p \approx 0$ (survival 1.000 at any r, by construction), 30% pruning gives a small p (survival at modest r), and fine-tuning gives a larger p and hence demands a larger r, matching the trends in Section VIII. Structured pruning and out-of-distribution fine-tuning violate the independence assumption, zeroing or shifting correlated carriers together, which is why they degrade recovery faster than (6) predicts.

d) Sub-quantum offset.: The offset in (3) is drawn from $\mathcal{U}(-(\frac{1}{2}-\delta), \frac{1}{2}-\delta)$ with a small margin δ (we use $\delta = 0.01$, i.e. ± 0.49). The margin keeps every weight strictly inside its bin, so re-quantization stays exact even under the floating-point rounding that a faithful neuron permutation introduces; shrinking $\delta \to 0$ maximizes mantissa naturalness but risks boundary crossings, while enlarging it trades a little stealth for a wider safety margin. The pinned weight uses offset 0.

VI. The Capacity-Robustness-Stealth Trilemma

The bootstrap channel is small for a reason, and the reason is a hard limit rather than an artefact of our construction. We make it precise (Figure 2).




Fig. 2. The trilemma. Each embedding occupies one edge, securing the two adjacent properties and giving up the opposite vertex.

a) Setup.: A convolutional network has weight tensors $W^{(\ell)} \in \mathbb{R}^{O_\ell \times I_\ell \times k_h^{(\ell)} \times k_w^{(\ell)}}$ ($\ell = 1, \ldots, L$), with $P = \sum_\ell O_\ell I_\ell k_h^{(\ell)} k_w^{(\ell)}$ weights and $S_\ell = k_h^{(\ell)} k_w^{(\ell)}$ spatial taps. A function-preserving neuron permutation is a family $\pi = \{\pi_\ell \in \mathfrak{S}_{O_\ell}\}$ acting by $(\pi \cdot W)^{(\ell)}[o, i, s] = W^{(\ell)}[\pi_\ell^{-1}(o), \pi_{\ell-1}^{-1}(i), s]$, where the constraint $\sigma_{\ell+1} = \pi_\ell$ keeps residual additions consistent; it leaves the function unchanged, $f_W = f_{\pi \cdot W}$. Let G be the group of such permutations. An embedding (Enc, Dec) maps a message $m \in \{0,1\}^C$ and host W to $\tilde{W}$ with $\text{Dec}(\tilde{W}) = m$ under a bounded, accuracy-preserving perturbation.

Definition 1 (Properties)**.** *An embedding is **(P1) high-capacity** if $C = \Theta(P)$; **(P2) permutation-invariant** if $\mathrm{Dec}(\pi \cdot \tilde{W}) = m$ for all $\pi \in G$; and **(P3) stealthy quantization-robust** if $\mathrm{Dec}(Q(\tilde{W})) = m$ for per-tensor INT8 Q and the law of $\tilde{W}$ matches benign weights.*

Lemma 1 (Position is the only stable identity)**.** *Under* (P3)*,* Dec *depends only on the code array $\{q[o, i, s]\}$. Two weights with the same code are indistinguishable after Q, and stealth forbids using the sub-quantum bits as identity, since fixing them collapses the in-bin law. Hence a weight's only readable identity is its position (o, i, s).*

Proposition 1 (Invariant-capacity bound)**.** *Any embedding satisfying* (P2) *and* (P3) *has $C \leq \sum_\ell S_\ell = \sum_\ell k_h^{(\ell)} k_w^{(\ell)}$.*

Proof. By Lemma 1 the decoder reads a function of the position-indexed codes; (P2) forces it to be constant on G-orbits. G permutes the channel axes (o, i) and fixes the spatial axis s, acting identically across taps. The only positional index invariant under every $\pi \in G$ is therefore $s \in \{1, \ldots, S_\ell\}$. A readout robust to the value perturbation of Q and to a constant pruning fraction must aggregate codes sharing an invariant index, i.e. a fixed tap, yielding at most one voted bit per tap per tensor. □

Remark 1 (Tightness). The bound is tight. The spatial-tap construction of Section V writes one bit at each tap, replicated across all $O_\ell I_\ell$ channels, and attains $C = \sum_\ell S_\ell$ while satisfying (P2) and (P3); the end-to-end recovery of a 128-bit key through the full INT8, pruning, and permutation pipeline (Section VIII-I) realizes it on a real network. Proposition 1 therefore cannot be improved.

Theorem 1 (Trilemma)**.** *No embedding satisfies* (P1)*,* (P2) *and* (P3) *at once; each pair is attainable.*

Proof. (P1)+(P3), not (P2): the per-weight code-LSB scheme writes one bit per weight, so $C = \Theta(P)$ and survives Q stealthily, but it is position-indexed (Lemma 1) and a permutation that moves positions destroys it. *(P2)+(P3), not (P1):* the spatial-tap scheme meets Proposition 1, $C = o(P)$, and survives Q and G. *(P1)+(P2), not (P3):* the per-tensor value histogram is G-invariant with entropy growing in P, but encoding into it reshapes the weight *value* distribution, breaking (P3) and washed out by Q. The first two cases combined give (P2)∧(P3)⇒ $C = o(P)$, contradicting (P1). □

Corollary 1 (The gap is quadratic in width)**.** *The invariant channel is smaller than the positional one by a factor $P/\sum_\ell S_\ell = \Theta(\overline{O\,I})$. For ResNet-18, $P = 1.117 \times 10^7$ while $\sum_\ell S_\ell = 196$, a ratio of about 5.7×10^4.*

Remark 2 (Relation to classical watermarking capacity). The trilemma is the weight-space analogue of a tension long studied in information-theoretic watermarking. Classical results bound the embedding rate of a robust mark by a mutual-information capacity under a host-distortion and an attack-distortion constraint [31], and quantization-index modulation [32] makes the host-interference-free regime explicit: the achievable rate collapses as the admissible host distortion shrinks, mirroring how our (P3) stealth-and-robustness constraint caps capacity. What is new in the network setting is the *group* that the channel must be robust to. Spread-spectrum and QIM marks are designed for robustness to additive noise and signal-processing operators [32], [33]; a deployed network admits in addition the function-preserving neuron-permutation group G, whose only invariants are the spatial taps (Lemma 1). Proposition 1 is thus a G-equivariant capacity bound rather than a distortion-rate one, and it is precisely the permutation group, absent in the signal-processing literature, that forces the quadratic-in-width gap of Corollary 1.

VII. Experimental Setup

We work with real, pretrained networks rather than toy proxies: ResNet-50 [34] on ImageNet [35] for capacity, ResNet-56 on CIFAR-10 [36] for accuracy, pruning and fine-tuning, and ResNet-18 on ImageNet for neuron permutation and the prior-art baselines. Quantization follows the standard per-tensor symmetric INT8 (and INT4) scheme of (1) [37]. For steganalysis we run the released Model X-Ray OSL detector [13], the Grayscale-Fourpart representation with a metric-learning few-shot head, scored by centroid and 1-NN, together with a panel of byte-level detectors: a MalConv-style 1D-CNN, a low-byte entropy test, a value-distribution test, a histogram-KL test, and a byte-autocorrelation test. The benign population is the diverse Model Zoos STL-10 small-CNN collection [38] of roughly 1.2×10^5 models; few-shot support is 20+20 over five repeats. Payloads are encrypted random bytes for the stealth and capacity studies, and real benign binaries for the structured-payload regime in which the naive attack is actually detectable. We report bit-survival and bit-recovery (chance 0.5), top-1 accuracy or F1, mantissa-byte entropy (4), and detector centroid/AUC.

VIII. Evaluation

A. Survival through quantization

Table II confirms the by-construction claim. The naive payload is erased (0.50); ours survives at 1.000 for per-tensor and per-channel INT8 and for INT4, with mantissa entropy pinned at the benign 7.999. INT4's coarser bins cost accuracy but not survival, which is consistent with the geometry of (2). The guarantee is not specific to INT8: Figure 3 sweeps the quantizer from INT8 down to INT3 and shows recovery stays at 1.000 whenever the payload is embedded on the grid the victim will use, while the naive mantissa-LSB scheme stays at chance everywhere. What the attacker must know is the deployment bit-width, not a particular value of it; a defender who quantizes *harder* than the attacker designed for is the one lever that erases the payload, at the cost of the accuracy that harder quantization itself removes.

TABLE II
SURVIVAL THROUGH QUANTIZATION ON REAL MODELS (CHANCE 0.5).

Scheme	survival	embed acc.	mant. entropy
naive X-LSB (INT8)	0.500	n/a	n/a
ours, per-tensor INT8	**1.000**	0.475	7.999
ours, per-channel INT8	**1.000**	0.488	7.999
ours, per-tensor INT4	**1.000**	0.138	7.999
ours, per-channel INT4	**1.000**	0.196	7.998

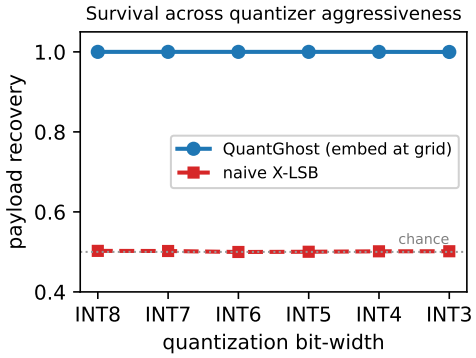


Fig. 3. Payload recovery versus quantizer bit-width (chance 0.5). QuantGhost stays at 1.000 from INT8 to INT3 when embedded on the deployment grid; the naive mantissa-LSB attack is erased at every width.

B. Survival through a production quantizer

The numbers above use the analytical quantizer of (1). A skeptical reader will ask whether the payload survives a *real* deployment toolchain, so we re-ran the victim's quantization with PyTorch's production INT8 path (`torch.ao.quantization` with the `fbgemm` backend) on a real ResNet-56, letting the framework's own observer compute the scale from the embedded weights and reading the resulting `int8` codes back (Table III). This surfaces a detail that matters: PyTorch's symmetric observer sets the scale to $\max|w|/127.5$, half the full 255-wide range, not the $\max|w|/127$ that a naive embedding assumes. An embedding placed on the 127 grid therefore drifts under the real kernel, and survival falls to 0.968 (per-tensor) and 0.925 (per-channel), with errors concentrated at the high-magnitude codes where the 0.4% scale gap compounds. A *convention-aware* QuantGhost, which simply embeds on the victim's actual $\max|w|/127.5$ grid, removes the drift: raw survival returns to 1.000 per-tensor and 0.999 per-channel through the unmodified PyTorch kernel, and the small per-channel residual is cleaned by redundancy, so message recovery is byte-exact at redundancy R=5. The capability this assumes, knowing which standard quantizer the victim runs, is realistic: quantization recipes are public and few. The attack is thus not an artefact of our analytical model; it survives the same kernel a practitioner would actually deploy.

C. Accuracy is preserved

On a real CIFAR-10 ResNet-56 (top-1 94.25%) the full attack barely moves the needle (Table IV). Embedding a 106 KB payload and then applying the victim's INT8 quantization

TABLE III
SURVIVAL THROUGH PYTORCH'S PRODUCTION INT8 KERNEL (`TORCH.AO.QUANTIZATION`, REAL RESNET-56). RAW CODE-LSB SURVIVAL; CHANCE 0.5.

Embedding grid	per-tensor	per-channel
convention-naive ($\max|w|/127$)	0.968	0.925
convention-aware ($\max|w|/127.5$)	**1.000**	**0.999**
convention-aware + redundancy R=5, majority vote: **byte-exact** (1.000)		

TABLE IV
ACCURACY PRESERVATION ON A REAL CIFAR-10 RESNET-56. 106 KB PAYLOAD, RECOVERY 99.997%.

Condition	top-1
original FP32	94.25%
clean INT8	94.24%
embed FP32	93.97%
embed + INT8 (victim)	94.06%
Δ (orig $\rightarrow$ embed+INT8)	-0.19 pp

TABLE V
BASELINES UNDER INT8 ON A REAL RESNET-18 (CHANCE 0.5).

Method	capacity	survival INT8
EvilModel/StegoNet X=8	8 bit/w	0.500 (erased)
EvilModel/StegoNet X=16	16 bit/w	0.500 (erased)
EvilModel/StegoNet X=23	23 bit/w	0.501 (erased)
robust watermark	$\leq$2 KB	robust (low-cap)
QuantGhost	1 bit/w	**1.000**

costs 0.19 percentage points, and the payload comes back at 99.997% before error correction. Quantization alone accounts for almost none of the loss, which tells us the residual is the embedding's own sub-quantum nudge.

D. Capacity and comparison with prior art

On ResNet-50 (25.5M weight parameters) a 3.19 MB encrypted payload survives FP32$\rightarrow$INT8 at 99.9999%, and the handful of residual errors, one pinned weight per tensor, are repaired by the erasure layer for byte-exact delivery. Table V sets this against prior art on a real ResNet-18: the naive attack is erased at every depth, while ours survives. Robust watermarking [21], [22] occupies the opposite corner, robust and stealthy but capped at a couple of kilobytes, which is the trade we explain in Section VI.

E. Scaling to a Vision Transformer

Because the embedding acts on raw weight tensors, it is indifferent to architecture, and nothing about it is tied to convolutions. We confirm this on a real ImageNet-pretrained Vision Transformer (ViT-B/16 [39]), whose 52 attention and feed-forward weight matrices hold 86.4M parameters, a 10.81 MB carrier at one bit per weight. Embedding a full random payload and applying the victim's per-tensor INT8 quantization recovers it at 1.000 with mantissa-byte entropy at the benign 8.000, exactly the by-construction behaviour seen on CNNs. Accuracy is likewise untouched: on a CIFAR-10 ViT the

TABLE VI
QUANTGHOST ON A REAL VIT-B/16 TRANSFORMER: CAPACITY, INT8 SURVIVAL, STEALTH, AND CIFAR-10 TOP-1 (CHANCE 0.5).

Quantity	value
embeddable weight matrices	52
capacity @ 1 bit/weight	10.81 MB
survival, per-tensor INT8	**1.000**
mantissa-byte entropy (benign 8.0)	8.000
top-1: orig → embed	97.92% → 97.92%
top-1: embed → embed+INT8	97.92% → 97.90%

TABLE VII
STEALTH AGAINST THE RELEASED MODEL X-RAY OSL DETECTOR. DIVERSE ZOO, 20+20 SUPPORT, FIVE REPEATS.

Population	attack	centroid	1-NN
homogeneous (artefact)	ours	0.747	0.681
diverse	naive X-LSB	0.807	0.794
diverse	**QuantGhost**	**0.504**	**0.508**

embedding leaves top-1 *unchanged* (97.92% → 97.92%), and the subsequent INT8 step costs a further 0.02 points (Table VI). The trilemma and the attack it bounds are thus properties of weight-space embedding in general, not of any one model family.

F. Stealth against detectors

Stealth is not uniform across detectors, and we report the full result (Figure 4, Table VII). Against the released Model X-Ray detector our embedding sits at chance (0.50) on a diverse model population, while the naive attack is detected (0.81); the detector plainly works, it simply cannot separate ours from benign. We initially measured a higher number (0.75) on a small, homogeneous pilot zoo, but that turned out to be an artefact, near-identical benign models inflate few-shot separability, and it vanishes once the population is realistically diverse. Across the byte-level panel ours evades MalConv, histogram-KL and byte-autocorrelation (all near 0.5) and is caught only by the entropy and value-distribution tests, which pins down precisely which two detectors a defender should keep.

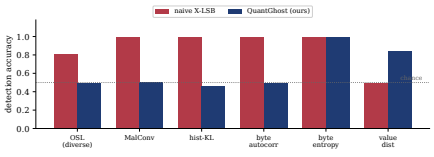


Fig. 4. Detection accuracy (chance 0.5) of the naive attack and ours across six detectors. Ours evades four; only byte-entropy and value-distribution catch it.

G. Pruning and fine-tuning

Survival under pruning is reported in Figure 5 and Table VIII. The pattern is clean: there is no operating point that removes the payload and keeps the model. Unstructured pruning leaves the payload fully recoverable at 30% (accuracy

TABLE VIII
PRUNING ON REAL RESNET-56 (RECOVERY / TOP-1), REDUNDANCY 3326×.

Prune ratio	unstructured	structured
30%	1.000 / 93.8%	1.000 / 10.0%
50%	0.977 / 92.1%	0.535 / 10.9%
70%	0.535 / 78.3%	0.535 / 10.0%
90%	0.535 / 19.9%	0.535 / 10.0%

TABLE IX
FAITHFUL NEUPERM ON REAL RESNET-18 (11.2M CONV WEIGHTS, $\Delta_{\text{fp64}} = 1.1 \times 10^{-14}$); AFTER-PERMUTATION COLUMNS ARE MEAN±STD OVER 30 INDEPENDENT RANDOM PERMUTATIONS.

Channel	no perm	after NeuPerm (30×)
positional (high-capacity)	1.000	0.522 ± 0.023 (chance)
spatial-tap (invariant, 196 bit)	1.000	**1.000 ± 0.000**

93.8%) and only erases it at 70–90%, where accuracy has itself fallen to 78% and then 20%. Structured pruning destroys the model at every ratio, the accuracy is already at chance, while the payload partly survives, so it is not a useful sanitizer either. Fine-tuning is gentler still: three epochs of same-task training leave recovery at 1.000 for both high and modest redundancy (3326× and 207×) with accuracy at 94.2%. Only a harsher, out-of-distribution fine-tune bites, as we show next.

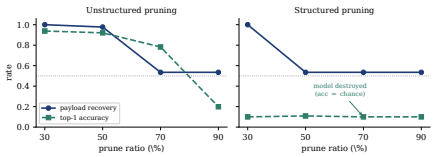


Fig. 5. Pruning on a real ResNet-56: payload recovery and top-1 accuracy versus ratio. The payload only dies where accuracy also dies; structured pruning destroys the model at every ratio.

H. Neuron permutation at real scale

Table IX reports a faithful neuron permutation on a real ResNet-18, implemented with the residual, batch-norm and downsample bookkeeping that a correct permutation requires. We verified it is function-preserving to machine precision: the logit difference is 1.1×10^{-14} in float64, so accuracy is identical by construction and needs no measurement. To show the outcome is not a lucky single draw, we apply 30 independent random permutations to the same embedded model. The high-capacity positional payload collapses to chance every time, mean recovery 0.522 ± 0.023 (95% CI $[0.513, 0.530]$, worst case 0.586 over a 256-bit message, far below the redundancy needed to read it), exactly as the trilemma predicts. The spatial-tap channel, in contrast, survives *every one* of the 30 permutations without a single bit error (1.000 ± 0.000, minimum 1.000) at 196 bits across the network's 20 conv tensors. NeuPerm thus reliably pins the attacker to the low-capacity corner without closing the channel.

TABLE X
CROSS-ARCHITECTURE / CROSS-DATASET ABLATION ON A TABULAR IDS MLP.

Quantity	value
IDS F1 (orig → embed+INT8)	$0.989 \rightarrow 0.989$
accuracy (orig → embed+INT8)	$97.85\% \rightarrow 97.85\%$
payload survival INT8 (MLP)	**1.000**
invariant capacity (FC vs conv)	3 bits vs 196
cross-dataset fine-tune (F1)	$0.930 \rightarrow 0.982$
payload after that fine-tune	0.469 (chance, 208×)

I. End-to-end bootstrap: defeating NeuPerm

Although the surviving channel is small, it is operationally sufficient, as we demonstrate end to end on a real ResNet-18. The attacker encrypts a 4 KB payload with a random AES-128 key, places the ciphertext in the high-capacity positional channel, and places the 128-bit key in the permutation-invariant spatial channel (capacity 196 bits, so the key fits with room to spare). The victim then applies the entire pipeline at once: per-tensor INT8 quantization, 30% unstructured pruning, and a faithful neuron permutation. After this chain, the positional payload in the weights is gone (recovery 0.50, chance), exactly as the trilemma predicts. The key, however, is recovered *bit-exactly* (128/128), and using it to decrypt the ciphertext, which the attacker delivers out of band, returns the original 4 KB payload *byte-for-byte*. The strongest single defense in the literature therefore bounds the attacker to the low-capacity corner but does not close the channel: a few hundred surviving bits are enough to carry a key that bootstraps the full payload. This is the operational meaning of an "incomplete" sanitizer, and it is why Section X argues that permutation must be paired with explicit inspection of the invariant spatial statistics.

J. Cross-architecture and cross-dataset ablation

Because the embedding manipulates raw weights, nothing about it is specific to vision or to convolutions. Table X bears this out on a tabular network-intrusion MLP trained on CICIoMT [29] for binary benign-versus-attack detection (F1 0.989). The 1664 B payload survives INT8 at 1.000 and accuracy and F1 are unchanged across all four conditions. Two things are worth drawing out. The MLP has only three linear tensors and no spatial taps, so its permutation-invariant capacity is just three bits against 196 for ResNet-18, the bound of Proposition 1 holding across architectures, since a dense layer is the $k_h k_w = 1$ case. And a genuinely cross-dataset fine-tune, taking the model from CICIoMT to CICIoT [28] over the shared feature space, adapts the detector (F1 $0.930 \rightarrow 0.982$) and, unlike same-task fine-tuning, breaks the payload at 208× redundancy (0.469, chance). The lesson is that it is transform severity, not transform type, that sets the surviving capacity.

IX. A TARGETED DETECTOR FOR QUANTGHOST

The byte-level and gf-image steganalyzers of Section VIII fail against QuantGhost because they look in the wrong place: the mantissa-byte distribution is preserved (entropy 7.999) and the float value distribution is benign on a diverse population. The exploitable signal is one level down, in the *sub-quantum residual* $r = w/s - \mathrm{round}(w/s)$. A benign tensor's residual is, to a good approximation, *uniform* on $[-\frac{1}{2}, \frac{1}{2})$: trained weights spread over many quantization bins, so by equidistribution their fractional parts fill the bin evenly (we measure a flat histogram, mass 0.100 per decile). QuantGhost also yields a near-uniform residual, but not the *same* one, and the differences are precisely those that survival forces and the attacker cannot avoid. First, the scale-defining weight, and in the basic scheme every non-carrier weight, must sit *exactly* on the grid to preserve the quantization scale, adding a spike of mass at $r = 0$. Second, the carrier offset is drawn from $[-\delta, \delta)$ with $\delta < \frac{1}{2}$, so the bin edges are slightly depleted. Both deviations are small in magnitude but consistent across models, which is exactly the regime a linear classifier exploits. Algorithm 2 turns the residual histogram into a concrete detector.

Algorithm 2 Sub-quantum residual steganalyzer

Require: model weight tensors $\{W^{(\ell)}\}_{\ell=1}^{L}$, classifier $(\mathbf{w}, b, \tau)$, $q_{\max}$, bins B
Ensure: decision $\in \{\text{BENIGN}, \text{STEGO}\}$
for each weight tensor $W^{(\ell)}$ **do**
  $s \leftarrow \max_i |W_i^{(\ell)}| / q_{\max}$
  $r \leftarrow W^{(\ell)}/s - \mathrm{round}(W^{(\ell)}/s)$ ▷ residual in $[-\frac{1}{2}, \frac{1}{2})$
  $h^{(\ell)} \leftarrow \text{HIST}(r, B \text{ bins on } [-\frac{1}{2}, \frac{1}{2}))$, normalized to sum 1
end for
$\mathbf{x} \leftarrow \frac{1}{L} \sum_\ell h^{(\ell)}$ ▷ mean residual histogram, feature in $\mathbb{R}^B$
$p \leftarrow \sigma(\mathbf{w} \cdot \mathbf{x} + b)$ ▷ logistic-regression score
return $p > \tau$? STEGO : BENIGN

The classifier $(\mathbf{w}, b)$ is fit offline by logistic regression on benign (label 0) and stego (label 1) feature vectors. Inference is a single pass over the weights, $O(P)$ time, and uses no knowledge of the payload itself.

a) Result.: With five-fold cross-validation across five random seeds (Table XI, Figure 6a) the residual detector reaches ROC-AUC 1.000 ± 0.000 against the basic QuantGhost embedding on the CIFAR carrier zoo, where the mantissa-entropy baseline that prior steganalysis relies on is exactly at chance (0.500). Crucially, this generalizes: on a diverse population of 3000 GHRP STL-10 models spanning different seeds, activations, optimizers, initializations and learning rates, the detector still flags the basic attack at 0.980 ± 0.003. Against an unsophisticated attacker the targeted detector therefore closes the stealth gap that the byte-level detectors leave open, and it does so on realistically heterogeneous models.

b) Adaptive attacker, and the limit of detection.: A natural counter is to widen the offset and drop the exact-zero pin signature. On the homogeneous CIFAR zoo this adaptive QuantGhost only lowers the detector to AUC 0.754 ± 0.049, and a sweep of the offset width (Figure 6b) shows no *interior* setting helps: a narrow offset produces a sharp-edged box as un-benign as a wide one. But that residual separability is itself partly an artefact of a narrow benign population, exactly the effect we found inflating the Model X-Ray score in Section VIII. On the diverse GHRP zoo the adaptive attacker

TABLE XI
PROPOSED SUB-QUANTUM RESIDUAL DETECTOR, FIVE-FOLD CROSS-VALIDATED ROC-AUC (MEAN ± STD OVER FIVE SEEDS; CHANCE 0.5) ON A NARROW CARRIER ZOO (60 CIFAR MODELS) AND ON A DIVERSE ZOO (3000 GHRP STL-10 MODELS SPANNING SEEDS, ACTIVATIONS, OPTIMIZERS, INITIALIZATIONS, AND LEARNING RATES).

Detector vs. attacker	CIFAR zoo	diverse GHRP zoo
mantissa entropy vs. basic QuantGhost	0.500	—
residual histogram vs. basic QuantGhost	**1.000** ±.000	**0.980** ±.003
residual histogram vs. adaptive QuantGhost	0.754 ±.049	0.537 ±.042

falls to 0.537 ± 0.042, statistically indistinguishable from chance. The honest reading is therefore two-sided: the residual detector is a reliable filter against the basic, off-the-shelf attack across populations, but it does *not* stop an adaptive attacker on a realistic model distribution. Detection alone is thus necessary but not sufficient, which is precisely why it must be paired with the structural defense of Section X: regardless of how well an attacker matches the benign residual law, neuron permutation still bounds the surviving payload to the low-capacity invariant channel of Theorem 1.

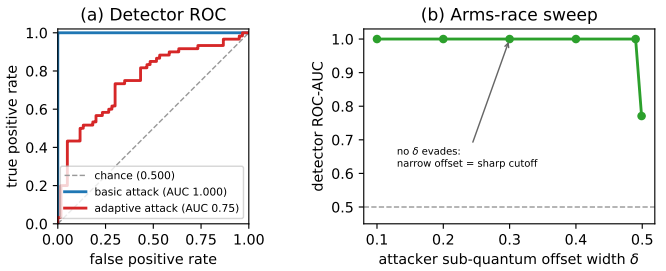


Fig. 6. Proposed sub-quantum residual detector. (a) ROC curves (out-of-fold scores): AUC 1.000 against the basic attack, 0.75 against the adaptive attack, both far above the chance diagonal. (b) Arms-race sweep on the carrier zoo: detector AUC versus the attacker's sub-quantum offset width δ; no interior δ evades. On a diverse zoo (Table XI) the adaptive attacker instead reaches chance.

X. DEFENSES

Reading the results as a defender, no single mechanism is enough, but a small combination is. We take each lever in turn.

a) Transforms are not clean sanitizers.: Quantization sanitizes the prior art and nothing else. Pruning, on a real model, never separates the payload's death from the model's: the bits go only when accuracy has already gone (Table VIII), and structured pruning simply breaks the network. Light fine-tuning leaves the payload in place; only an out-of-distribution fine-tune, which a benign deployer may not have a reason to run, bounds it.

b) Two detectors that work, and an arms race.: Among the detectors we tried, the entropy and value-distribution tests are the ones that catch our embedding (Figure 4); the gf-image OSL detector and the rest do not, once the benign population is diverse. But even those two invite an arms race. Because they read the marginal value distribution, switching from a single global scale to a per-tensor scale lowers their accuracy from 0.98 to 0.84, better stealth against them, and, just as the trilemma says, no help against the structural detector. The take-away for detection is to stop looking for distributional anomalies in the floats, which a careful attacker removes, and to look one level down at the sub-quantum residual: the targeted detector of Section IX catches the basic QuantGhost at AUC 1.000 on the narrow zoo and 0.980 on a diverse one, the most reliable signal we found against the off-the-shelf attack, though an adaptive attacker on the diverse zoo still reaches chance (0.537), which is why detection must be backed by the structural defense below.

c) NeuPerm and the residual.: NeuPerm is the strongest single defense and it does its job on the high-capacity channel (Table IX). What it cannot do, by Theorem 1, is remove the $\sum_\ell k_h k_w$-bit invariant channel, which is ample for a key or a URL.

d) What a complete sanitizer needs.: Putting these together, a defender who wants to actually close the channel must (i) bound the positional capacity with heavy quantization or stochastic weight perturbation, (ii) apply neuron permutation to remove it, and (iii) inspect the permutation-invariant spatial statistics the residual channel is forced to use, alongside the entropy and value-distribution detectors and a code low-bit predictability test. Each piece is partial; only their conjunction covers all three corners of the trilemma. The open costs are the operational price of routinely permuting shipped models, it rewrites the artefact and can break tooling that assumes a canonical channel order, and the false-positive rate of predictability testing on benign models.

XI. DISCUSSION AND LIMITATIONS

We state the main limitations. Accuracy and pruning use CIFAR- and IDS-scale models for an affordable transform sweep; the ResNet-50 capacity result lacks an ImageNet top-1 number. The faithful permutation covers the BasicBlock ResNet family and a dense IDS model; transformer blocks are mechanical but not done here. The residual detector (Section IX) is evaluated on the CIFAR zoo; larger benign populations and attacker–detector co-evolution to a fixed point are natural next steps. Finally, the trilemma is stated for the channel-permutation group of convolutional and dense layers; richer symmetry groups would only tighten the bound.

XII. ETHICS AND RESPONSIBLE DISCLOSURE

This is offensive research carried out to strengthen defenses. Every payload in our experiments is either encrypted random bytes or a benign binary; at no point is live malware embedded, executed, or distributed. The threat we describe is against published detectors and defenses, and we will disclose our findings to the authors of Model X-Ray and NeuPerm ahead of publication, together with the mitigations of Section X.

Reproducibility. To support defensive follow-up, we release the full code base, the quantization-aware embedding and faithful-permutation library, the detector, and the carrier model zoos, with a one-to-one mapping from every table and figure to the script that produces it. All experiments run on commodity hardware (a single GPU is optional); pretrained models and CIFAR-10 are fetched automatically, and the diverse benign

population is a 3000-model subsample of the public Model Zoos collection [38]. The code and data are archived on Zenodo at https://doi.org/10.5281/zenodo.20822603 [40].

XIII. Conclusion

QuantGhost makes a weight payload survive the entire deployment pipeline while preserving accuracy (-0.19 points on a real ResNet-56) and evading the released Model X-Ray detector, demonstrated at 3.2 MB on a real ResNet-50. Behind it sits a clean impossibility, the capacity-robustness-stealth trilemma, which bounds any permutation-invariant channel to $\sum_\ell k_h k_w$ bits; on a real ResNet-18 a faithful neuron permutation erases the high-capacity payload but a 196-bit channel survives and bootstraps full recovery. Deployment transforms alone, NeuPerm included, do not sanitize a shared model; doing so takes permutation together with the residual detector and the invariant-statistics inspection we propose. We hope the trilemma gives defenders a concrete target.

Acknowledgment

The authors gratefully acknowledge the Media and Games Innovation Centre of Excellence (MaGIC-X), Universiti Teknologi Malaysia, for supporting this research through its technical resources and computing facilities. This work was funded by Universitas Dinamika Bangsa, Jambi, Indonesia.

References

[1] T. Gu, B. Dolan-Gavitt, and S. Garg, "BadNets: Identifying vulnerabilities in the machine learning model supply chain," *arXiv preprint arXiv:1708.06733*, 2017.

[2] Y. Liu, S. Ma, Y. Aafer, W.-C. Lee, J. Zhai, W. Wang, and X. Zhang, "Trojaning attack on neural networks," in *Network and Distributed System Security Symposium (NDSS)*, 2018.

[3] G. Digregorio, M. Di Gennaro, S. Zanero, S. Longari, and M. Carminati, "On the (in)security of loading machine learning models," in *IEEE Symposium on Security and Privacy (S&P)*, 2026.

[4] T. Liu, Z. Liu, Q. Liu, W. Wen, W. Xu, and M. Li, "StegoNet: Turn deep neural network into a stegomalware," in *Annual Computer Security Applications Conference (ACSAC)*, 2020, pp. 928–938.

[5] Z. Wang, C. Liu, and X. Cui, "EvilModel: Hiding malware inside of neural network models," in *IEEE Symposium on Computers and Communications (ISCC)*, 2021, pp. 1–7.

[6] Z. Wang, C. Liu, X. Cui, J. Yin, and X. Wang, "EvilModel 2.0: Bringing neural network models into malware attacks," *Computers & Security*, vol. 120, p. 102807, 2022.

[7] D. Hitaj, G. Pagnotta, B. Hitaj, L. V. Mancini, and F. Perez-Cruz, "MaleficNet: Hiding malware into deep neural networks using spread-spectrum channel coding," in *Computer Security – ESORICS*, ser. LNCS, 2022, pp. 425–444.

[8] D. Hitaj, G. Pagnotta, F. De Gaspari, S. Ruko, B. Hitaj, L. V. Mancini, and F. Perez-Cruz, "Do you trust your model? emerging malware threats in the deep learning ecosystem," *IEEE Transactions on Dependable and Secure Computing*, vol. 22, 2025.

[9] B. Jacob, S. Kligys, B. Chen, M. Zhu, M. Tang, A. Howard, H. Adam, and D. Kalenichenko, "Quantization and training of neural networks for efficient integer-arithmetic-only inference," in *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018, pp. 2704–2713.

[10] S. Han, J. Pool, J. Tran, and W. J. Dally, "Learning both weights and connections for efficient neural networks," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2015.

[11] S. Han, H. Mao, and W. J. Dally, "Deep compression: Compressing deep neural networks with pruning, trained quantization and huffman coding," in *International Conference on Learning Representations (ICLR)*, 2016.

[12] D. Gilkarov and R. Dubin, "NeuPerm: Disrupting malware hidden in neural network parameters by leveraging permutation symmetry," *arXiv preprint arXiv:2510.20367*, 2025.

[13] D. Gilkarov and R. Dubin, "Model X-Ray: Detection of hidden malware in AI model weights using few shot learning," *Journal of Information Security and Applications*, vol. 101, p. 104517, 2026.

[14] R. Agrawal, K. Jou, T. Obili, D. Parikh, S. Prajapati, Y. Seth, C. Sridhar, N. Zhang, and M. Stamp, "On the steganographic capacity of selected learning models," *arXiv preprint arXiv:2308.15502*, 2023.

[15] L. Zhang, D. Li, O. Jurečková, and M. Stamp, "Steganographic capacity of deep learning models," *arXiv preprint arXiv:2306.17189*, 2023.

[16] R. Chaganti, V. Ravi, M. Alazab, and T. D. Pham, "Stegomalware: A systematic survey of malware hiding and detection in images, machine learning models and research challenges," *arXiv preprint arXiv:2110.02504*, 2021.

[17] J. Snell, K. Swersky, and R. Zemel, "Prototypical networks for few-shot learning," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.

[18] O. Vinyals, C. Blundell, T. Lillicrap, K. Kavukcuoglu, and D. Wierstra, "Matching networks for one shot learning," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2016.

[19] J. Zhu, J. Jang-Jaccard, A. Singh, P. A. Watters, and S. Camtepe, "Task-aware meta learning-based siamese neural network for classifying control flow obfuscated malware," *Future Internet*, vol. 15, no. 6, p. 214, 2023.

[20] K. Liu, B. Dolan-Gavitt, and S. Garg, "Fine-pruning: Defending against backdooring attacks on deep neural networks," in *Research in Attacks, Intrusions, and Defenses (RAID)*, 2018, pp. 273–294.

[21] Y. Li, B. Tondi, and M. Barni, "Spread-transform dither modulation watermarking of deep neural network," *Journal of Information Security and Applications*, vol. 63, p. 103004, 2021.

[22] B. Tondi, A. Costanzo, and M. Barni, "Robust and large-payload DNN watermarking via fixed, distribution-optimized, weights," *arXiv preprint arXiv:2208.10973*, 2022.

[23] G. Pagnotta, D. Hitaj, B. Hitaj, F. Perez-Cruz, and L. V. Mancini, "TATTOOED: A robust deep neural network watermarking scheme based on spread-spectrum channel coding," *arXiv preprint arXiv:2202.06091*, 2022.

[24] S. Vadigi, K. Sethi, D. Mohanty, S. P. Das, and P. Bera, "Federated reinforcement learning based intrusion detection system using dynamic attention mechanism," *Journal of Information Security and Applications*, vol. 78, p. 103608, 2023.

[25] T. L. Yasarathna and N.-A. Le-Khac, "SoK: Systematic analysis of adversarial threats against deep learning approaches for autonomous anomaly detection systems in SDN-IoT networks," *Journal of Information Security and Applications*, vol. 94, p. 104220, 2025.

[26] K. M. Sameera, P. Vinod, A. Rocha, K. A. R. Rehiman, and M. Conti, "WeiDetect: Weibull distribution-based defense against poisoning attacks in federated learning for network intrusion detection systems," *Journal of Information Security and Applications*, vol. 95, p. 104275, 2025.

[27] B. Aydın, H. Aydın, and S. Görmüs, "Intrusion detection systems in IoT: A detailed review of threat categories, detection strategies, and future technologies," *Journal of Information Security and Applications*, vol. 95, p. 104291, 2025.

[28] E. C. P. Neto, S. Dadkhah, R. Ferreira, A. Zohourian, R. Lu, and A. A. Ghorbani, "CICIoT2023: A real-time dataset and benchmark for large-scale attacks in IoT environment," *Sensors*, vol. 23, no. 13, p. 5941, 2023.

[29] S. Dadkhah, E. C. P. Neto, R. Ferreira, R. C. Molokwu, S. Sadeghi, and A. A. Ghorbani, "CICIoMT2024: A benchmark dataset for multi-protocol security assessment in IoMT," *Internet of Things*, vol. 28, p. 101351, 2024.

[30] M. Luby, "LT codes," in *43rd Annual IEEE Symposium on Foundations of Computer Science (FOCS)*, 2002, pp. 271–280.

[31] P. Moulin and J. A. O'Sullivan, "Information-theoretic analysis of information hiding," *IEEE Transactions on Information Theory*, vol. 49, no. 3, pp. 563–593, 2003.

[32] B. Chen and G. W. Wornell, "Quantization index modulation: A class of provably good methods for digital watermarking and information embedding," *IEEE Transactions on Information Theory*, vol. 47, no. 4, pp. 1423–1443, 2001.

[33] I. J. Cox, J. Kilian, F. T. Leighton, and T. Shamoon, "Secure spread spectrum watermarking for multimedia," *IEEE Transactions on Image Processing*, vol. 6, no. 12, pp. 1673–1687, 1997.

[34] K. He, X. Zhang, S. Ren, and J. Sun, "Deep residual learning for image recognition," in *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016, pp. 770–778.

[35] J. Deng, W. Dong, R. Socher, L.-J. Li, K. Li, and L. Fei-Fei, "ImageNet: A large-scale hierarchical image database," in *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2009, pp. 248–255.
[36] A. Krizhevsky, "Learning multiple layers of features from tiny images," University of Toronto, Tech. Rep., 2009.
[37] M. Nagel, M. Fournarakis, R. A. Amjad, Y. Bondarenko, M. van Baalen, and T. Blankevoort, "A white paper on neural network quantization," *arXiv preprint arXiv:2106.08295*, 2021.
[38] K. Schürholt, D. Taskiran, B. Knyazev, X. Giró-i Nieto, and D. Borth, "Model zoos: A dataset of diverse populations of neural network models," in *Advances in Neural Information Processing Systems (NeurIPS) Datasets and Benchmarks Track*, 2022.
[39] A. Dosovitskiy, L. Beyer, A. Kolesnikov, D. Weissenborn, X. Zhai, T. Unterthiner, M. Dehghani, M. Minderer, G. Heigold, S. Gelly, J. Uszkoreit, and N. Houlsby, "An image is worth 16x16 words: Transformers for image recognition at scale," in *International Conference on Learning Representations (ICLR)*, 2021.
[40] E. A. Winanto, M. Y. Idris, and Kurniabudi, "QuantGhost: Deployment-robust, stealthy weight steganography—code and data," 2026.



Eko Arip Winanto received the B.Sc. degree in computer science from Universitas Sriwijaya, Palembang, Indonesia, and the M.Phil. degree in computer science from Universiti Teknologi Malaysia (UTM), Johor Bahru, Malaysia, where he is currently pursuing the Ph.D. degree with the Faculty of Computing. He is also a Lecturer with the Department of Computer Engineering, Universitas Dinamika Bangsa, Jambi, Indonesia. His research interests include the security of the Internet of (Medical) Things, machine learning, federated learning, and network intrusion detection.



Mohd Yazid Idris received the Ph.D. degree from Universiti Teknologi Malaysia (UTM), Johor Bahru, Malaysia, in 2008. He is currently with the Faculty of Computing, UTM, where he is the Director of the Media and Game Innovation Centre of Excellence (MaGIC-X) and the Institute of Human Centered Engineering (iHumEn). His research interests include network security, intrusion detection, SCADA and IoT security, blockchain, and the application of machine learning to cybersecurity.



Kurniabudi received the Doctor of Engineering degree from Universitas Sriwijaya, Palembang, Indonesia. He is currently a Senior Lecturer with the Master of Information System program, Universitas Dinamika Bangsa, Jambi, Indonesia. His research interests include network intrusion detection, anomaly detection, feature selection, and the application of machine learning and deep learning to the security of IoT and IoMT systems.