Text Block Solution Overview

Contents

01. Summary 2
02. Prerequisites 4
03. Limitations 4
04. Look-and-Feel 5

01. Summary

Executive summary
A generic contextual widget that supports standardized operations for displaying, creating, editing, and deleting text blocks.

Problem statement
Standard text block panels often fall short in terms of user-interface design, yet they're used across a wide range of scenarios. Building separate, specialized widgets for each use case leads to unnecessary duplication, since most of the underlying logic remains the same.

Benefit to customer
This contextual widget provides a standardized approach to text block management, reducing development time and maintaining consistency across applications. The configurable nature ensures adaptability to various use cases.

Detailed description
The generic contextual widget serves as a complete text block management solution. It offers core functionality for display, adding, editing, and deleting text block content. The widget includes configurable settings that allow users to define text block parameters and specify table keys, making it adaptable to different data structures and requirements. This configuration support ensures the widget can be easily integrated into various application contexts while maintaining its core functionality.

02. Widget Settings

The widget settings include a search function that helps you identify the correct table when searching for a program, and it also retrieves the appropriate table keys and API parameters needed for configuration.



The Transfer File (TFIL) value must be entered manually. After TFIL is provided, the remaining fields are automatically populated based on the selected program or table. All automatically populated values can still be adjusted manually if required.

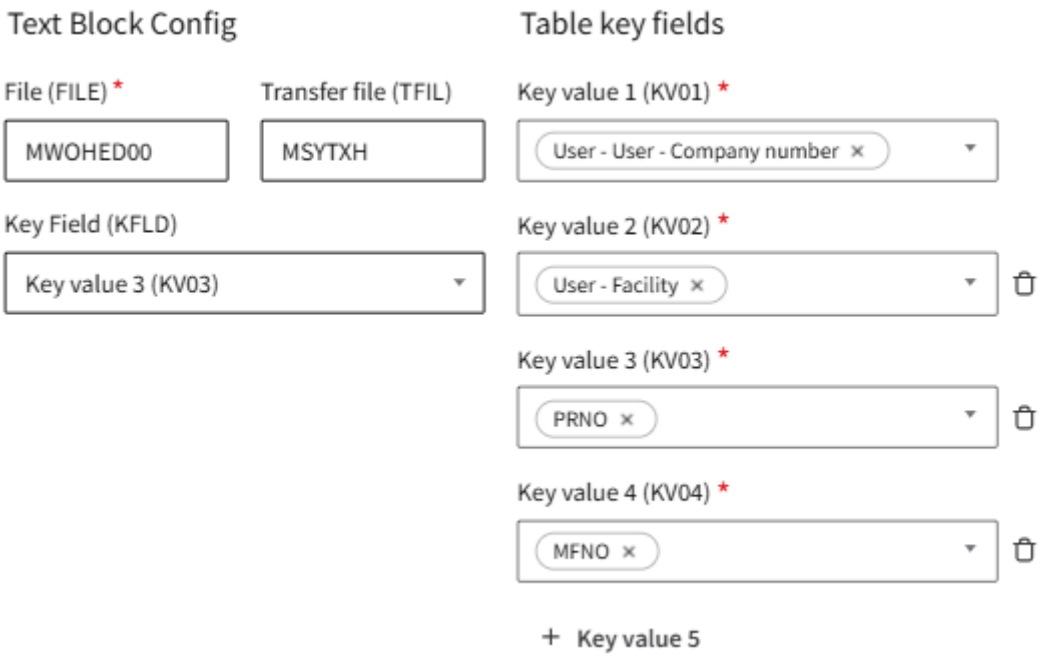

03. Prerequisites

Transfer file (TFIL) is required to create new text blocks and needs to be set manually. Displaying existing text blocks should work even if transfer file is left blank. The widget will then run multiple API calls and see if any of the following TFIL values return any result:

- CSYTXH
- FSYTXH
- MSYTXH
- OSYTXH
- SSYTXH

04. Limitations

The widget has been tested only in a small set of scenarios, so might be use cases that are not supported.

05. Look-and-Feel

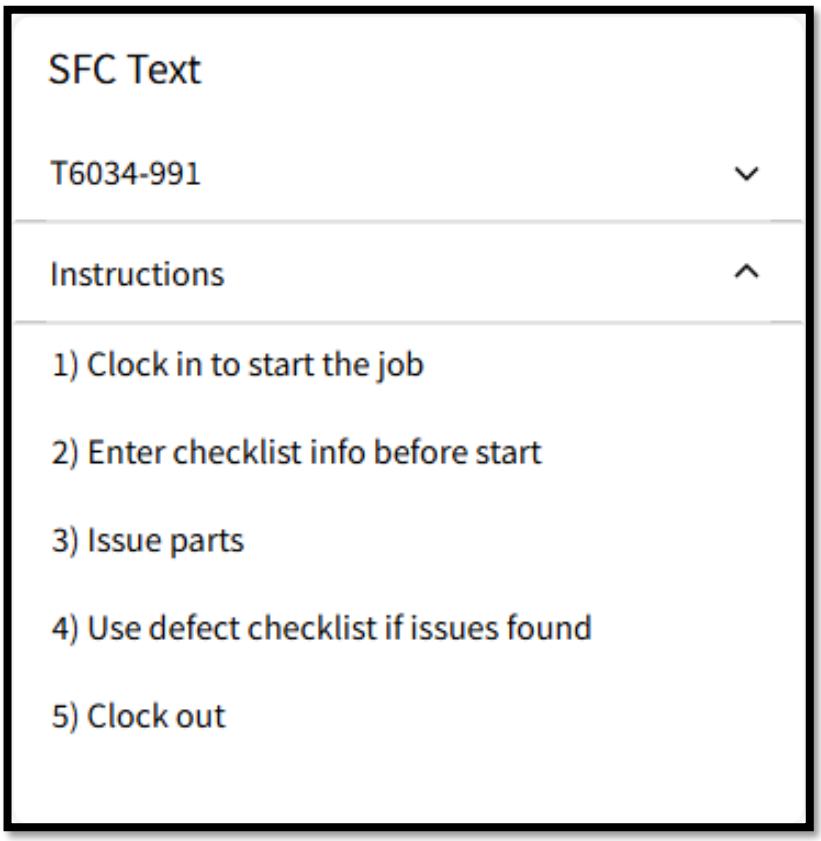

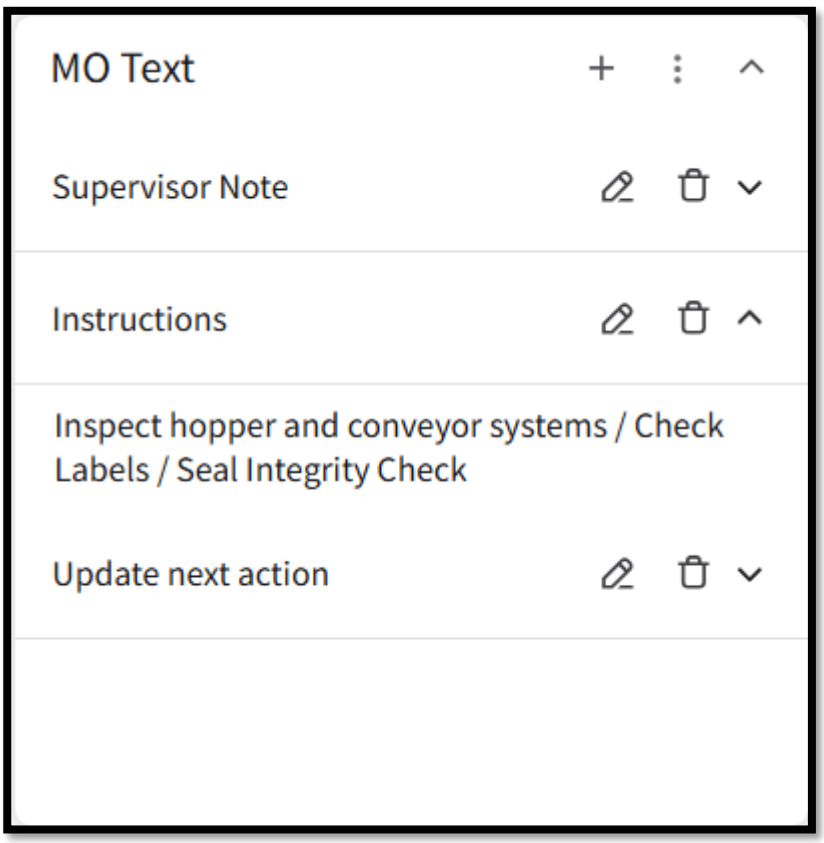

Settings

Title

Text Block

Edit enabled

Text Block Language

User language

Delete enabled

Search Table/ Key fields

Program

Table

Search

Text Block Config

File (FILE) *

MWOHED00

Transfer file (TFIL)

MSYTXH

Key Field (KFLD)

Key value 3 (KV03)

Table key fields

Key value 1 (KV01) *

User - User - Company number ×

Key value 2 (KV02) *

User - Facility ×

Key value 3 (KV03) *

PRNO ×

Key value 4 (KV04) *

MFNO ×

+ Key value 5

Cancel

Save