

Aluno: Robson Correia Luz

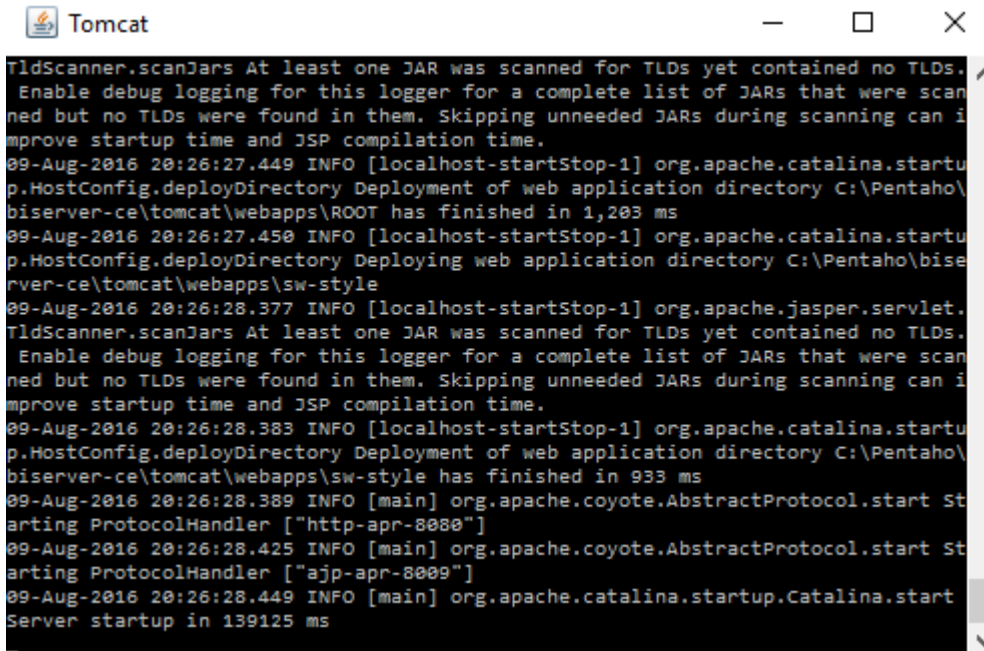
Matricula: 201110006268

Atividade 4 – Tutorial de instalação do Pentaho Business Intelligence

1) Depois de fazer o download e extrair a pasta, executar o arquivo start-pentaho.bat para iniciar


data	07/04/2016 15:18	Pasta de arquivos	
licenses	07/04/2016 15:18	Pasta de arquivos	
pentaho-solutions	07/04/2016 15:18	Pasta de arquivos	
third-party-tools	07/04/2016 15:18	Pasta de arquivos	
tomcat	07/04/2016 15:18	Pasta de arquivos	
import-export.bat	07/04/2016 15:18	Arquivo em Lotes do Windows	1 KB
import-export.sh	07/04/2016 15:18	Shell Script	1 KB
promptuser.js	07/04/2016 15:18	Arquivo JavaScript	2 KB
promptuser.sh	07/04/2016 15:18	Shell Script	1 KB
set-pentaho-env.bat	07/04/2016 15:18	Arquivo em Lotes do Windows	5 KB
set-pentaho-env.sh	07/04/2016 15:18	Shell Script	4 KB
start-pentaho.bat	07/04/2016 15:18	Arquivo em Lotes do Windows	2 KB
start-pentaho.sh	07/04/2016 15:18	Shell Script	2 KB
start-pentaho-debug.bat	07/04/2016 15:18	Arquivo em Lotes do Windows	2 KB
start-pentaho-debug.sh	07/04/2016 15:18	Shell Script	2 KB
stop-pentaho.bat	07/04/2016 15:18	Arquivo em Lotes do Windows	1 KB
stop-pentaho.sh	07/04/2016 15:18	Shell Script	1 KB

2) Esta janela irá aparecer depois que abrir o arquivo mostrado anteriormente, aguardar até que mostre a mensagem “Server startup in x ms”

A screenshot of a Tomcat console window. The title bar says "Tomcat" with standard window controls. The console output shows various log messages from the Apache Catalina and Jasper servlet engines. Key messages include: "TldScanner.scanJars At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete list of JARs that were scanned but no TLDs were found in them. Skipping unneeded JARs during scanning can improve startup time and JSP compilation time.", "09-Aug-2016 20:26:27.449 INFO [localhost-startStop-1] org.apache.catalina.startup.HostConfig.deployDirectory Deployment of web application directory C:\Pentaho\biserver-ce\tomcat\webapps\ROOT has finished in 1,203 ms", "09-Aug-2016 20:26:27.450 INFO [localhost-startStop-1] org.apache.catalina.startup.HostConfig.deployDirectory Deploying web application directory C:\Pentaho\biserver-ce\tomcat\webapps\sw-style", "09-Aug-2016 20:26:28.377 INFO [localhost-startStop-1] org.apache.jasper.servlet.TldScanner.scanJars At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete list of JARs that were scanned but no TLDs were found in them. Skipping unneeded JARs during scanning can improve startup time and JSP compilation time.", "09-Aug-2016 20:26:28.383 INFO [localhost-startStop-1] org.apache.catalina.startup.HostConfig.deployDirectory Deployment of web application directory C:\Pentaho\biserver-ce\tomcat\webapps\sw-style has finished in 933 ms", "09-Aug-2016 20:26:28.389 INFO [main] org.apache.coyote.AbstractProtocol.start Starting ProtocolHandler ["http-apr-8080"]", "09-Aug-2016 20:26:28.425 INFO [main] org.apache.coyote.AbstractProtocol.start Starting ProtocolHandler ["ajp-apr-8009"]", and "09-Aug-2016 20:26:28.449 INFO [main] org.apache.catalina.startup.Catalina.start Server startup in 139125 ms".

```
TldScanner.scanJars At least one JAR was scanned for TLDs yet contained no TLDs.
Enable debug logging for this logger for a complete list of JARs that were scan
ned but no TLDs were found in them. Skipping unneeded JARs during scanning can i
mprove startup time and JSP compilation time.
09-Aug-2016 20:26:27.449 INFO [localhost-startStop-1] org.apache.catalina.startu
p.HostConfig.deployDirectory Deployment of web application directory C:\Pentaho\
biserver-ce\tomcat\webapps\ROOT has finished in 1,203 ms
09-Aug-2016 20:26:27.450 INFO [localhost-startStop-1] org.apache.catalina.startu
p.HostConfig.deployDirectory Deploying web application directory C:\Pentaho\bise
rver-ce\tomcat\webapps\sw-style
09-Aug-2016 20:26:28.377 INFO [localhost-startStop-1] org.apache.jasper.servlet.
TldScanner.scanJars At least one JAR was scanned for TLDs yet contained no TLDs.
Enable debug logging for this logger for a complete list of JARs that were scan
ned but no TLDs were found in them. Skipping unneeded JARs during scanning can i
mprove startup time and JSP compilation time.
09-Aug-2016 20:26:28.383 INFO [localhost-startStop-1] org.apache.catalina.startu
p.HostConfig.deployDirectory Deployment of web application directory C:\Pentaho\
biserver-ce\tomcat\webapps\sw-style has finished in 933 ms
09-Aug-2016 20:26:28.389 INFO [main] org.apache.coyote.AbstractProtocol.start St
arting ProtocolHandler ["http-apr-8080"]
09-Aug-2016 20:26:28.425 INFO [main] org.apache.coyote.AbstractProtocol.start St
arting ProtocolHandler ["ajp-apr-8009"]
09-Aug-2016 20:26:28.449 INFO [main] org.apache.catalina.startup.Catalina.start
Server startup in 139125 ms
```

3) Com o servidor startado, digitar no navegador de preferência o endereço abaixo

A screenshot of a web browser's address bar. It contains the text "localhost:8080/pentaho" in a blue font. To the left of the text is a small icon of a document with a magnifying glass.

localhost:8080/pentaho

4)Na página de login, colocar “admin” em usuário e “password” em senha



Concluído

