Module 5 Challenge

New Attempt

Due Feb 7 by 12:59am

Points 100

Submitting a text entry box or a website url

Background

V. Isualize has given you and Omar a brand-new assignment. Using your Python skills and knowledge of Pandas, you'll create a summary DataFrame of the ride-sharing data by city type. Then, using Pandas and Matplotlib, you'll create a multiple-line graph that shows the total weekly fares for each city type. Finally, you'll submit a written report that summarizes how the data differs by city type and how those differences can be used by decision-makers at PyBer.

What You're Creating

This new assignment consists of two technical analysis deliverables and a written report to present your results. You will submit the following:

- Deliverable 1: A ride-sharing summary DataFrame by city type
- Deliverable 2: A multiple-line chart of total fares for each city type
- Deliverable 3: A written report for the PyBer analysis (README.md)

Files

Use the following link to download the Challenge starter code.

<u>Download challenge starter code</u> <u>(https://2u-data-curriculum-team.s3.amazonaws.com/dataviz-</u>

<u>online/module_5/PyBer_Challenge_starter_code.ipynb)</u>

Deliverable 1: A ride-sharing summary DataFrame by city type (35 points)

Deliverable 1 Instructions

Using the Pandas <code>groupby()</code> function with the <code>count()</code> and <code>sum()</code> methods on PyBer DataFrame columns, get the total number of rides, total number of drivers, and the total fares for each city type. Then, calculate the average fare per ride and average fare per driver for each city type. Finally, add this data to a new DataFrame, then format the columns.

REWIND

For this deliverable, you've already done the following in this module:

- Lesson 5.3.2: Use the (groupby()) function
- Lesson 5.3.2: Use the (count()) method
- **Lesson 5.4.1:** Format numbers and strings
- Lesson 5.5.1: Use the [sum()] method

1. Download the PyBer_Analysis folder and rename it PyBer_Challenge.ipynb.

- 2. Use the step-by-step instructions below to add code where indicated by the numbered comments in the starter code file.
- 3. In Step 1, use the <code>groupby()</code> function to create a Series of data that has the type of city as the index, then apply the <code>count()</code> method to the "ride_id" column.
- 4. In Step 2, use the <code>groupby()</code> function to create a Series of data that has the type of city as the index, then apply the <code>sum()</code> method to the "driver_count" column.
- 5. In Step 3, use the <code>groupby()</code> function to create a Series of data that has the type of city as the index, then apply the <code>sum()</code> method to the "fare" column.
- 6. In Step 4, calculate the average fare per ride by city type by dividing the sum of all the fares by the total rides.
- 7. In Step 5, calculate the average fare per driver by city type by dividing the sum of all the fares by the total drivers.
- 8. In Step 6, create a PyBer summary DataFrame with all the data gathered from Steps 1-5, using the column names shown below:.

	Total Rides	Total Drivers	Total Fares	Average Fare per Ride	Average Fare per Driver	
type						
Rural	125	78	4327.93	34.623440	55.486282	
Suburban	625	490	19356.33	30.970128	39.502714	
Urban	1625	2405	39854.38	24.525772	16.571468	

- 9. In Step 7, use the provided code snippet to remove the index name ("type") from the PyBer summary DataFrame.
- 10. In Step 8, format the columns of the Pyber summary DataFrame to look like this:

	Total Rides	Total Drivers	Total Fares	Average Fare per Ride	Average Fare per Driver
Rural	125	78	\$4,327.93	\$34.62	\$55.49
Suburban	625	490	\$19,356.33	\$30.97	\$39.50
Urban	1,625	2,405	\$39,854.38	\$24.53	\$16.57

Deliverable 1 Requirements

You will earn a perfect score for Deliverable 1 by completing all requirements below:

- The total number of rides for each city type is retrieved. (5 pt)
- The total number of drivers for each city type is retrieved. (5 pt)
- The sum of the fares for each city type is retrieved. (5 pt)
- The average fare per ride for each city type is calculated. (5 pt)
- The average fare per driver for each city type is calculated. (5 pt)
- A PyBer summary DataFrame is created. (5 pt)
- The PyBer summary DataFrame is formatted as shown in the example. (5 pt)

Deliverable 2: A multiple-line chart of total fares for each city type (45 points)

Deliverable 2 Instructions

Using your Pandas skills and two new functions, (pivot()) and (resample()), create a multiple-line graph that shows the total fares for each week by city type.

REWIND

For this deliverable, you've already done the following in this module:

- <u>Lesson 5.1.3:</u> Create a line chart using the object-oriented interface method
- Lesson 5.1.4: Annotate charts
- Lesson 5.1.10: Graph a Pandas DataFrame
- Lesson 5.3.2: Use the (groupby()) function
- Lesson 5.5.1: Use the sum() method

Use the step-by-step instructions below to add code where indicated by the numbered comments in the starter code file:

- 1. In Step 1, create a new DataFrame with multiple indices using the groupby() function on the "type" and "date" columns of the pyber_data_df DataFrame, then apply the sum() method on the "fare" column to show the total fare amount for each date.
- 2. In Step 2, use the provided code snippet to reset the index. This is needed to use the pivot() function in the next step (Step 3).
- 3. In Step 3, use the pivot() function to convert the DataFrame from the previous step so that the index is the "date," each column is a city "type," and the values are the "fare."
 - After this step, you'll see that each cell has the total fare for the date and time, as shown in the following image.

Note: In cells where there is no fare to be summed for that row, the cell will be filled with NaNs.

type	Rural	Suburban	Urban
date			
2019-01-01 00:08:16	NaN	NaN	37.91
2019-01-01 00:46:46	NaN	47.74	NaN
2019-01-01 02:07:24	NaN	24.07	NaN
2019-01-01 03:46:50	NaN	NaN	7.57
2019-01-01 05:23:21	NaN	NaN	10.75
2019-01-01 09:45:36	43.69	NaN	NaN
2019-01-01 12:32:48	NaN	25.56	NaN
2019-01-01 14:40:14	NaN	NaN	5.42
2019-01-01 14:42:25	NaN	NaN	12.31
2019-01-01 14:52:06	NaN	31.15	NaN

If you'd like a hint on how to create a pivot table from a DataFrame, that's totally okay. If not, that's great too. You can always revisit this later if you change your mind.

SHOW HINT

- 4. In Step 4, create a new DataFrame by using the loc method on the following date range: 2019-01-01 through 2019-04-28.
- 5. In Step 5, use the provided code snippet to reset the index of the DataFrame from the previous step (Step 4) to a datetime data type. This is necessary to use the resample() method in Step 7.

- 6. In Step 6, use the provided code snippet, df.info(), to check that the "date" is a datetime data type.
- 7. In Step 7, create a new DataFrame by applying the resample() function to the DataFrame you modified in Step 5. Resample the data in weekly bins, then apply the sum() method to get the total fares for each week.


If you'd like a hint on how to create a pivot table from a DataFrame, that's totally okay. If not, that's great too. You can always revisit this later if you change your mind.

SHOW HINT

 After creating the resampled DataFrame in Step 7, confirm that your DataFrame looks like this:

type	Rural	Suburban	Urban
date			
2019-01-06	187.92	721.60	1661.68
2019-01-13	67.65	1105.13	2050.43
2019-01-20	306.00	1218.20	1939.02
2019-01-27	179.69	1203.28	2129.51
2019-02-03	333.08	1042.79	2086.94
2019-02-10	115.80	974.34	2162.64
2019-02-17	95.82	1045.50	2235.07
2019-02-24	419.06	1412.74	2466.29
2019-03-03	175.14	858.46	2218.20
2019-03-10	303.94	925.27	2470.93

- 8. Finally, in Step 8, graph the resampled DataFrame from Step 7 using the object-oriented interface method and the <code>df.plot()</code> method, as well as the Matplotlib "fivethirtyeight" graph style code snippet provided in the starter code. Annotate the y-axis label and the title, then use the appropriate code to save the figure as <code>PyBer_fare_summary.png</code> in your "analysis" folder.
 - Confirm that your multiple-line chart looks like the following image, where each week is a peak or dip in the line graphs.

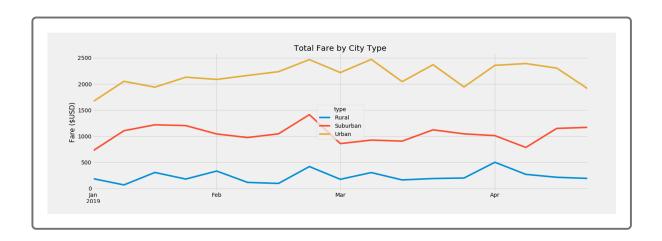

Deliverable 2 Requirements

You will earn a perfect score for Deliverable 2 by completing all requirements below:

- A DataFrame was created using the groupby() function on the "type" and "date" columns, and the sum() method is applied on the "fare" column to show the total fare amount for each date and time. (10 pt)
- A DataFrame was created using the pivot() function where the index is the "date," the columns are the city "type," and the values are the "fare." (10 pt)
- A DataFrame was created using the loc method on the date range: 2019-01-01 through 2019-04-28. **(5 pt)**

- A DataFrame was created using the resample() function in weekly bins and shows the sum of the fares for each week. (10 pt)
- An annotated chart showing the total fares by city type is created and saved to the "analysis" folder. (10 pt)

Deliverable 3: A written report for the PyBer analysis (20 points)

Deliverable 3 Instructions

Use your repository README file to write your analysis of how to address any disparities in the ride-sharing data among the city types.

The analysis should contain the following:

- 1. Overview of the analysis: Explain the purpose of the new analysis.
- 2. **Results:** Using images from the summary DataFrame and multipleline chart, describe the differences in ride-sharing data among the different city types.
- 3. **Summary:** Based on the results, provide three business recommendations to the CEO for addressing any disparities among the city types.

Deliverable 3 Requirements

Structure, Organization, and Formatting (6 points)

The written analysis has the following structure, organization, and formatting:

- There is a title, and there are multiple sections. (2 pt)
- Each section has a heading and subheading. (2 pt)

Links to images are working and displayed correctly. (2 pt)

Analysis (14 points)

The written analysis has the following:

- 1. Overview of the analysis:
 - The purpose of the new analysis is well defined. (3 pt)

2. Results:

 There is a description of the differences in ride-sharing data among the different city types. Ride-sharing data include the total rides, total drivers, total fares, average fare per ride and driver, and total fare by city type. (7 pt)

3. Summary:

 There is a statement summarizing three business recommendations to the CEO for addressing any disparities among the city types. (4 pt)

Submission

Once you're ready to submit, make sure to check your work against the rubric to ensure you are meeting the requirements for this Challenge one final time. It's easy to overlook items when you're in the zone!

As a reminder, the deliverables for this Challenge are as follows:

- Deliverable 1: A ride-sharing summary DataFrame by city type.
- Deliverable 2: A multiple-line chart of total fares for each city type.
- Deliverable 3: A written report for the PyBer analysis (README.md).

Upload the following to your PyBer_Analysis GitHub repository:

- 1. The PyBer Challenge.ipynb file.
 - The results need to be kept populated in the
 PyBer_Challenge.ipynb
 file. Do not clear the output from the
 PyBer_Challenge.ipynb
 file before uploading to GitHub.
- 2. The "Resources" folder with the city_data.csv and ride_data.csv files.
- 3. The "analysis" folder with the PyBer_fare_summary.png.
- 4. An updated README.md that has your written analysis.

To submit your challenge assignment in Canvas, click Submit, then provide the URL of your PyBer_Analysis GitHub repository for grading. Comments are disabled for graded submissions in BootCampSpot. If you have questions about your feedback, please notify your instructional staff or the Student Success Manager. If you would like to resubmit your work for an improved grade, you can use the **Re-Submit Assignment** button to upload new links. You may resubmit up to 3 times for a total of 4 submissions.

IMPORTANT

Once you receive feedback on your Challenge, make any suggested updates or adjustments to your work. Then, add this week's Challenge to your professional portfolio.

NOTE

You are allowed to miss up to two Challenge assignments and still earn your certificate. If you complete all Challenge assignments, your lowest two grades will be dropped. If you wish to skip this assignment, click Next, and move on to the next Module.



Module-5 Rubric

Ratings							
35 to >31.0 pts Demonstrating Proficiency √The total rides, total drivers, or sum of the fares for each city type	31 to >27.0 pts Approaching Proficiency TWO of the THREE following data points are correctly retrieved: √The	27 to >24.0 pts Developing Proficiency TWO of the THREE following data points are correctly retrieved: √The total rides,	24 to >0.0 pts Emerging ONE of the THREE following data points are correctly retrieved: √The total rides, total	0 pts Incomplete	Pts		
are correctly retrieved. The average fare per ride for each city type is correctly calculated. The average fare per driver for each city type is correctly calculated. A summary DataFrame is created and all the columns are correct. All FIVE columns of the summary DataFrame are correctly formatted	total rides, total drivers, or sum of the fares for each city type. AND: Code is written to retrieve the remaining data points for each city type but with one minor error. The average fare per ride OR per driver for each city type is correctly calculated, and the other is incorrect. A summary DataFrame is created, but only THREE to FOUR of the columns are correct. THREE to FOUR of the columns of the DataFrame are	total drivers, or sum of the fares for each city type. AND: \Code is written to retrieve the remaining data points for each city type but with one minor error. \Code is written to calculate the average fare per ride for each city type but with one minor error. \Code is written to calculate the average fare per ride for each city type but with one minor error. \Code is written to calculate the average fare per driver for each city type but with one minor error. \A summary DataFrame is created, but only TWO to THREE of the columns are correct. \TWO to THREE of the	drivers, or sum of the fares for each city type. AND: Code is written to retrieve the other TWO data points for each city type but with minor errors. Code is written to calculate the average fare per ride for each city type but with one minor error. Code is written to calculate the average fare per driver for each city type but with one minor error. A summary DataFrame is created, but only ONE to TWO of the columns are correct. ONE to TWO of the		35 pts		
	Proficiency √The total rides, total drivers, or sum of the fares for each city type are correctly retrieved. √The average fare per ride for each city type is correctly calculated. √The average fare per driver for each city type is correctly calculated. √A summary DataFrame is created and all the columns are correct. √All FIVE columns of the summary DataFrame are correctly	Proficiency √The total rides, total drivers, or sum of the fares for each city type are correctly retrieved. √The average fare per ride for each city type is correctly calculated. √The average fare per driver for each city type is correctly calculated. ✓A summary DataFrame is created and all the columns are correctly DataFrame are correctly correctly Code is written to retrieve the remaining data points for each city type. AND: √Code is written to retrieve the remaining data points for each city type. AND: √Code is written to retrieve the remaining data points for each city type is created city type but with one minor error. √The average fare per ride OR per driver for each city type is correctly calculated, and the other is incorrect. ✓A summary DataFrame are correctly formatted THREE to FOUR of the columns of the	Proficiency √The total rides, total drivers, or sum of the fares for each city type are correctly retrieved. √The average fare per driver for each city type is correctly rore each city type is correctly rore each city type is correctly calculated. ✓A summary DataFrame is created and all the columns are correctly columns of the summary DataFrame are correctly retrieved: √The total rides, total THREE following data points are correctly retrieved: √The total rides, total drivers, or sum of the fares for each city type. AND: √Code is written to retrieve the remaining data points for each city type but with one minor error. √Code is written to calculated the average fare per ride OR per driver for each city type is correctly Calculated. ✓A summary DataFrame is created and all the columns are correct. ✓All FIVE columns of the summary DataFrame are correctly formatted Approaching Proficiency TWO of the THREE following data points are correctly √The total rides, total drivers, or sum of the fares for each city type. AND: √Code is written to retrieve the remaining data points are correctly total rides, total drivers, or sum of the fares for each city type. AND: √Code is written to retrieve the remaining data points are correctly for each city type. AND: √Code is written to retrieve the remaining data points are correctly for each city type but with one minor error. √Code is written to calculate the average fare per ride for each city type but with one minor error. √Code is written to calculate the average fare per ride for each city type but with one minor error. ✓Code is written to calculate the average fare per ride for each city type but with one minor error. ✓Thate to FOUR of the columns are correct. ✓A summary DataFrame is created, but only THREE to FOUR of the columns are correct. ✓TWO to THREE of the	Proficiency √The total rides, total drivers, or sum of the fares for each city type is correctly calculated. √The average fare per driver for each city type is correctly calculated. √The average fare per driver for each dill the columns are correct. ✓All FIVE columns of the summary DataFrame is correctly Demonstrating Proficiency TWO of the TWO of the THREE following data points are correctly retrieved: √The total rides, total drivers, or sum of the fares for each city type is correctly calculated. √The average fare per driver for each city type is correctly Calculated. √The average fare per driver for each city type is correctly Calculated. √A summary DataFrame is correctly Cate is written to calculate the average fare per driver for the summary DataFrame are correct. √All FIVE columns of the summary DataFrame are correctly Cate is written to calculate the average fare per driver for the summary DataFrame is correctly Cate is written to retrieve the remaining data points for each city type but with one minor error. √Code is written to calculate the average fare per ride for each city type but with one minor error. √Code is written to calculate the average fare per driver for each city type but with one minor error. √Code is written to calculate the to calculate the average fare per driver for each city type but with one minor error. √Code is written to calculate the to calculate t	Proficiency √The total rides, total drivers, or sum of the fares for each city type average fare per driver for each city type is correctly calculated. ✓A summary DataFrame are correct. ✓All FIVE columns of the summary DataFrame are correctly C√The stotal rides, total drivers, or sum of the fare ser or each city type is correctly Calculated. ✓A summary DataFrame are correctly Correctly C√The average fare per driver for each city type is correctly Cor		

Deliverable						
2: A multiple- line chart of	45 to >42.0 pts Demonstrating Proficiency	42 to >39.0 pts Approaching Proficiency	39 to >34.0 pts Developing Proficiency	34 to >0.0 pts Emerging	0 pts Incomplete	
total fares for each city type	√A DataFrame	√A DataFrame	√A DataFrame	√A DataFrame was created		
	was created	was created	was created			
	using the	using the	using the	using the groupby()		
	groupby()	groupby()	groupby()	function on the		
	function on the	function on the	function on the	"type" and "date"		
	"type" and "date"	"type" and "date"	"type" and "date"	columns, and the		
	columns, and the	columns, and the	columns, and the	sum() method is		
	sum() method is	sum() method is	sum() method is	applied on the		
	applied on the	applied on the	applied on the	"fare" column.		
	"fare" column. √A	"fare" column. √A	"fare" column. √A	√Code is written		
	DataFrame was	DataFrame was	DataFrame was	with a minor		
	created using the	created using the	created using the	error to create a		
	pivot() function	pivot() function	pivot() function	DataFrame		
	where the index	where the index	where the index	using the pivot()		
	is the "date", the	is the "date", the	is the "date", the	function where		
	columns are the	columns are the	columns are the	the index is the		
	city "type", and	city "type", and	city "type", and	"date" and each		
	values are the	values are the	values are the	column has the		45 p
	"fare". √A	"fare". √A	"fare". √A	city "type". √A		
	DataFrame was	DataFrame was	DataFrame was	DataFrame was		
	created using the	created using the	created using the	created using		
	loc method on	loc method on	loc method on the	the loc method		
	the date range	the date range	date range	on the date		
	indicated √A	indicated. √A	indicated. √Code	range indicated.		
	DataFrame was	DataFrame was	is written to	√Code is written		
	created using the	created using the	create a	to create a		
	resample()	resample()	DataFrame using	DataFrame		
	function in	function in weekly	the resample()	using the		
	weekly bins and	bins and shows	function in weekly	resample()		
	shows the sum of	the sum of the	bins, but the total	function in		
	the fares for each	fares for each	fares aren't	weekly bins, but		
	week. √An	week. √The	retrieved	the total fares		
	annotated chart	graph may have	correctly. √The	aren't retrieved		
	showing the total	multiple lines but	graph may have	correctly. √The		
	fares by city type	not like the	multiple lines but	graph doesn't		
	is created and	solution, but is	not like the	have multiple		
	saved.	annotated and	solution, but is	lines but is		
		saved.	annotated and	annotated and		

saved.

saved.

Criteria	Ratings							
Deliverable 3: Structure, Organization, and Formatting	6 to >5.0 pts Demonstrating Proficiency The written analysis has ALL of the following: √There is a title, and there are multiple sections. √Each section has a heading and subheading. √There are images which are formatted and displayed correctly. 5 to >4.0 pts Approaching Proficiency The written analysis has ALL of the following: √There is a title, and there are multiple sections. √Each section has a heading and subheading. √There are images which are formatted and displayed correctly with one or two minor errors.	4 to >3.0 pts Developing Proficiency The written analysis has ALL of the following: √There is a title, and there are multiple sections. AND ONE of the following: √Each section may have a heading and subheading. √There are images which are formatted and displayed correctly with one or two minor errors	3 to >0.0 pts Emerging The written analysis has ALL of the following: √There is a title. √There may be a subheading for a section. √There are no headings for each section, but there are three sections.		6 pts			
Deliverable 3: Analysis	14 to >11.0 pts Demonstrating Proficiency √The purpose is well defined. √There is a description of the differences in the ride-sharing data for ALL SIX metrics by city type. √There is a statement summarizing THREE business recommendations addressing disparities among the city types.	11 to >9.0 pts Approaching Proficiency √The purpose is well defined. √There is a description of the differences in the ride-sharing data for FOUR to FIVE of the SIX metrics by city type. √There is a statement summarizing TWO business recommendations addressing disparities among the city types.	9 to >8.0 pts Developing Proficiency √The purpose is well defined. √There is a description of the differences in the ride- sharing data for TWO to THREE of the SIX metrics by city type. √There is a statement summarizing ONE business recommendation addressing disparities among the city	8 to >0.0 pts Emerging The purpose is well defined. There is a description of the differences in the ride-sharing data for ONE to TWO of the SIX metrics by city type. The summary does not adequately address business recommendations addressing disparities among the city types.	0 pts Incomplete	14 pt		