
Blue Flag Drone Test


Rocío Jabardo Velasco

14th July 2016

Implementation

To solve this test I've used Java language (JDK 7u79, java version 1.7.0_79).

My program reads the instructions provided by an input file, and stores the locations (x,y) that were photographed, including the number of times they were photographed. To do this, I've used a HashMap object which key is the 'x' coordinate, and the value is another HashMap. The key of this second HashMap is the 'y' coordinate, and the value the number of times that location was photographed:

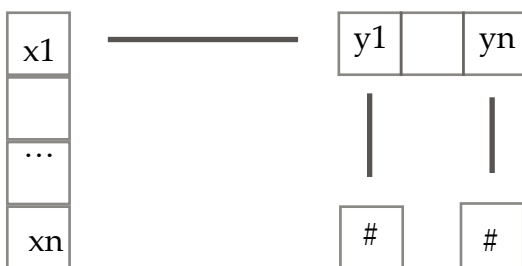

The output, displayed on console, is the number of billboards that were photographed at least once, and also an output file is created with all the billboards locations and the number of times they were photographed. This output file is located in the same path as the input file and the name is *<inputFileName>TestResult.txt*. The locations can be negative, due to the initial location is set to (0,0).

Instructions

I have included a build.xml file located at *Blue Flag Drone Test/lib*.

To run build.xml file, ANT must be already installed and the library unit.jar located in *ANT_HOME/lib*. This library can be found in the path *Blue Flag Drone Test/lib*.

To build the application, place in build.xml path, then run the command:
>ant

BlueFlagDroneTest.jar is generated in *Blue Flag Drone Test/lib/build* folder.
To run the application, place in *./build* path or type the full path run the command:
>java -jar BlueFlagDroneTest.jar <inputfile>

<inputfile> is optional. If no arguments, then the application reads from console.
