

EXPERIMENT:1

Create a new process by invoking the appropriate system call. Get the process identifier of the currently running process and its respective parent using system calls and display the same using a C program.


Code:-

```
#include <stdio.h>
#include <unistd.h>

int main()
{
    printf("Process ID: %d\n", getpid());
    printf("Parent Process ID: %d\n", getppid());

    return 0;
}
```

Output:

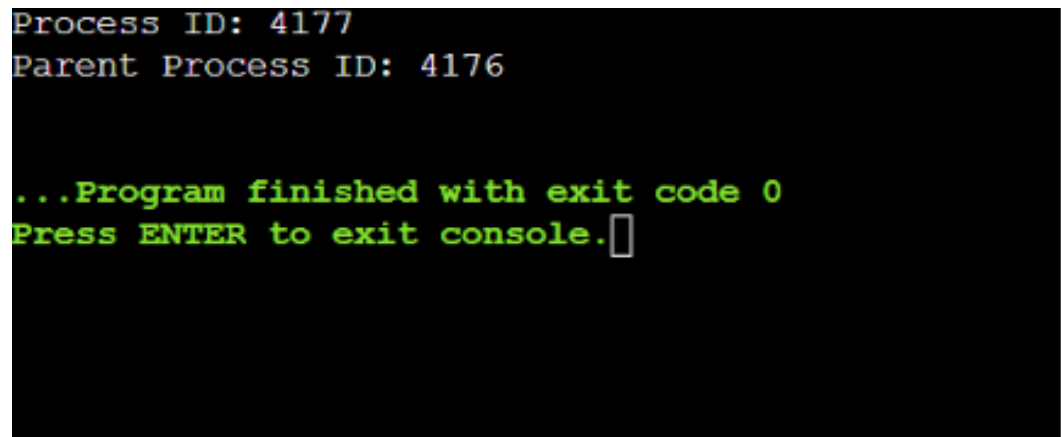

```
Process ID: 4177
Parent Process ID: 4176

...Program finished with exit code 0
Press ENTER to exit console.█
```