

Experiment28:

Write a C program for simulation of GREP UNIX command.

Code:-

```
#include <stdio.h>

#include <stdlib.h>

#include <string.h>

#define MAX_LINE_LENGTH 1024

void searchFile(const char *pattern, const char *filename)

{

    FILE *file = fopen(filename, "r");

    if (file == NULL)

    {

        perror("Error opening file");

        exit(1);

    }

    char line[MAX_LINE_LENGTH];

    while (fgets(line, sizeof(line), file))

    {

        if (strstr(line, pattern) != NULL)

        {

            printf("%s", line);

        }

    }

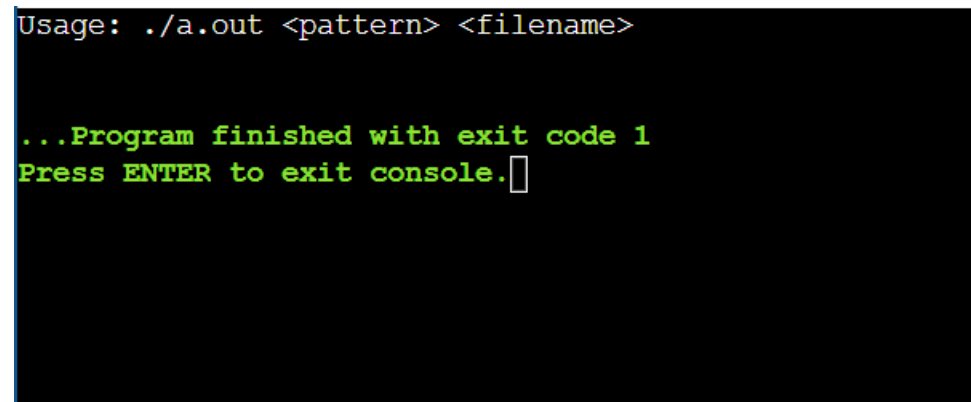
    fclose(file);

}

int main(int argc, char *argv[])
```

```
{  
  
if (argc != 3)  
  
{  
  
fprintf(stderr, "Usage: %s \n", argv[0]);  
  
return 1;  
  
}  
  
const char *pattern = argv[1];  
const char *filename = argv[2];  
  
searchFile(pattern, filename);  
  
return 0;  
}
```

Output:

A screenshot of a terminal window with a black background and green text. The first line shows the usage message: "Usage: ./a.out <pattern> <filename>". The second line shows the program's exit message: "...Program finished with exit code 1". The third line shows a prompt for the user to press ENTER to exit the console: "Press ENTER to exit console." followed by a small square cursor.

```
Usage: ./a.out <pattern> <filename>  
  
...Program finished with exit code 1  
Press ENTER to exit console.□
```