

Experiment:15

Design a C program to organize the file using two level directory structure.

Code:-

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

int main()
{
    char mainDirectory[] = "C:/Users/itssk/OneDrive/Desktop";
    char subDirectory[] = "os";
    char fileName[] = "example.txt";

    char mainDirPath[200];
    char filePath[200];
    snprintf(mainDirPath, sizeof(mainDirPath),
             "%s/%s/", mainDirectory, subDirectory);
    snprintf(filePath, sizeof(filePath),
             "%s%s", mainDirPath, fileName);
    FILE *file = fopen(filePath, "w");

    if (file == NULL)
    {
        printf("Error creating file.\n");
        return 1;
    }
}
```

```
fprintf(file, "This is an example file content.");
```

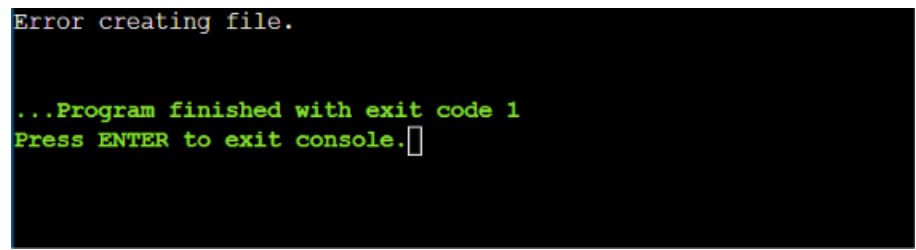
```
fclose(file);
```

```
printf("File created successfully: %s\n", filePath);
```

```
return 0;
```

```
}
```

Output:

A screenshot of a terminal window with a black background. The text "Error creating file." is displayed in a light blue or cyan monospaced font. Below it, after a blank line, the text "...Program finished with exit code 1" is shown in a green monospaced font. The final line, "Press ENTER to exit console.", is also in green and followed by a small white cursor icon.

```
Error creating file.
```

```
...Program finished with exit code 1
```

```
Press ENTER to exit console.█
```